

THIS DRAWING IS UNPUBLISHED

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED

© COPYRIGHT

 $\Theta_Y =$

LOC

CM

DIST

00

REVISIONS

P

LIR

DESCRIPTION

D&S

NAME _____

APV

F

REVISÉD PER ECQ-12-016926

0400

KH

SN





F1

FCR-12-016748

3041

MT

D.

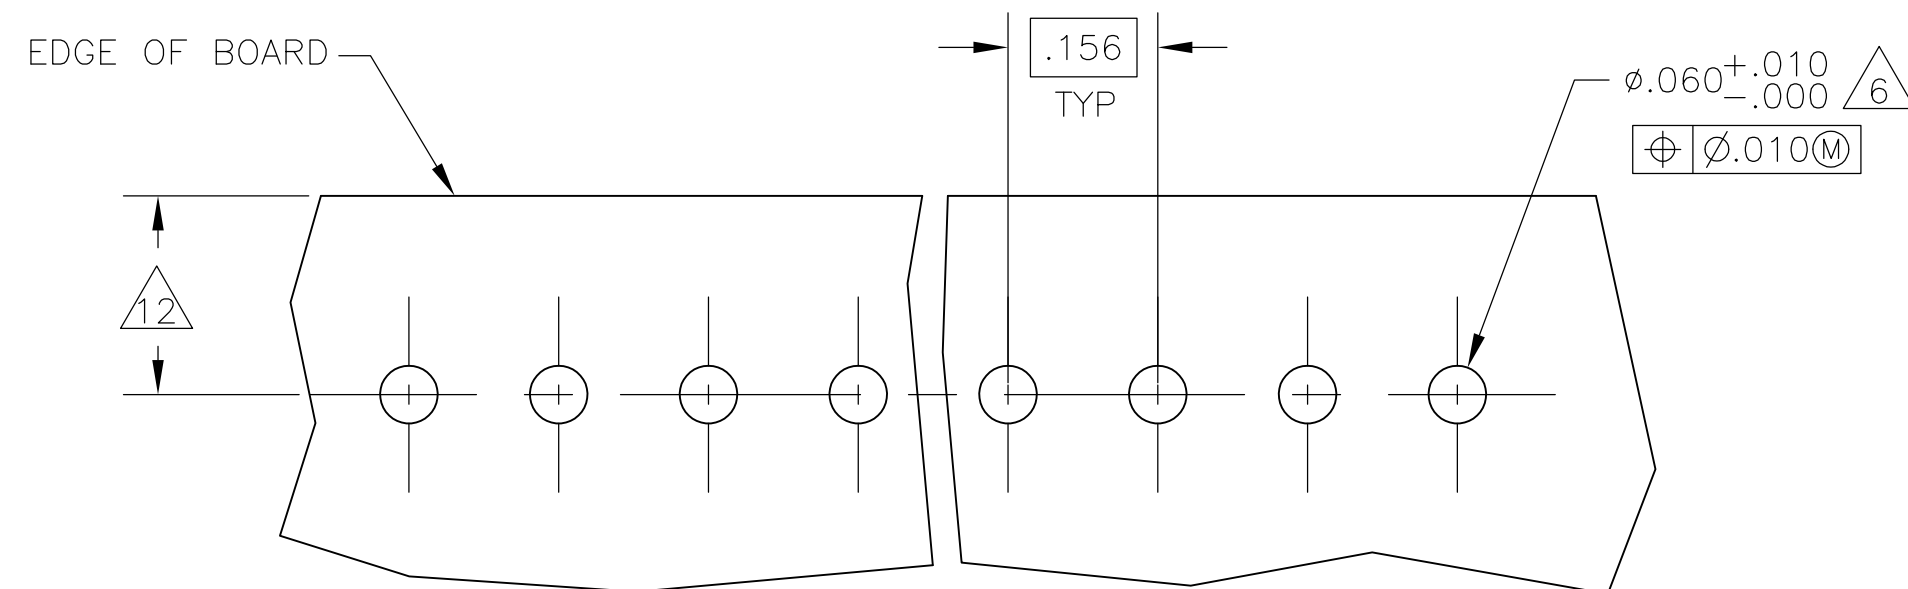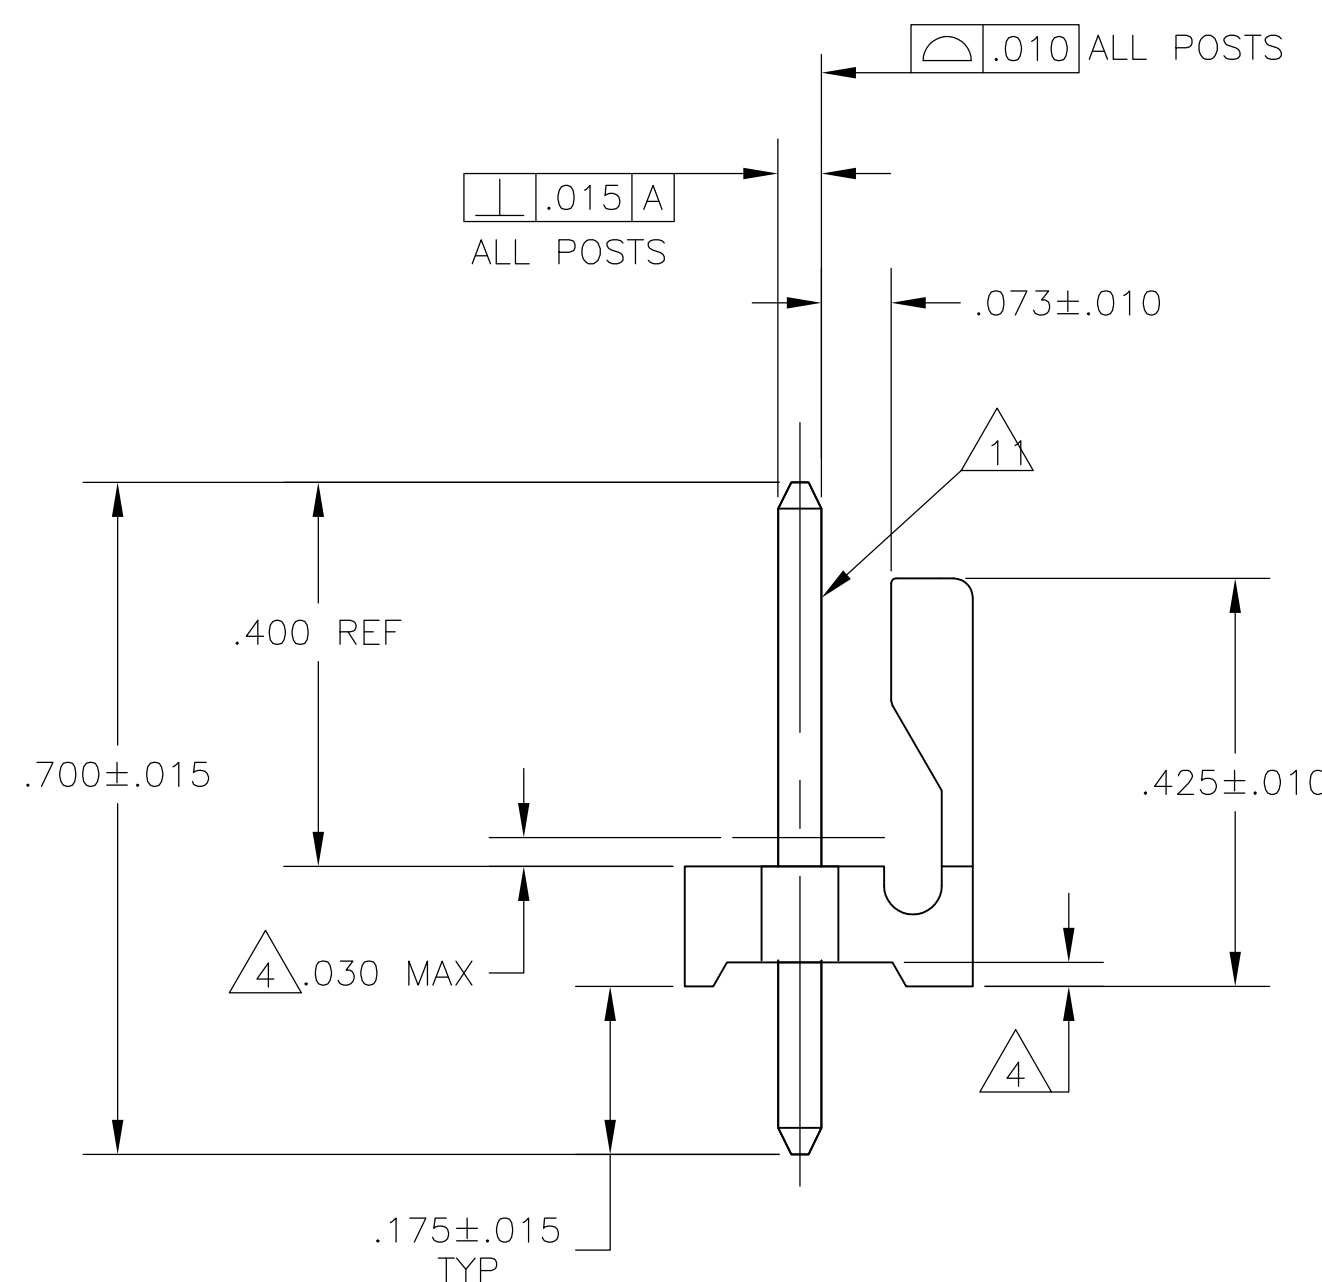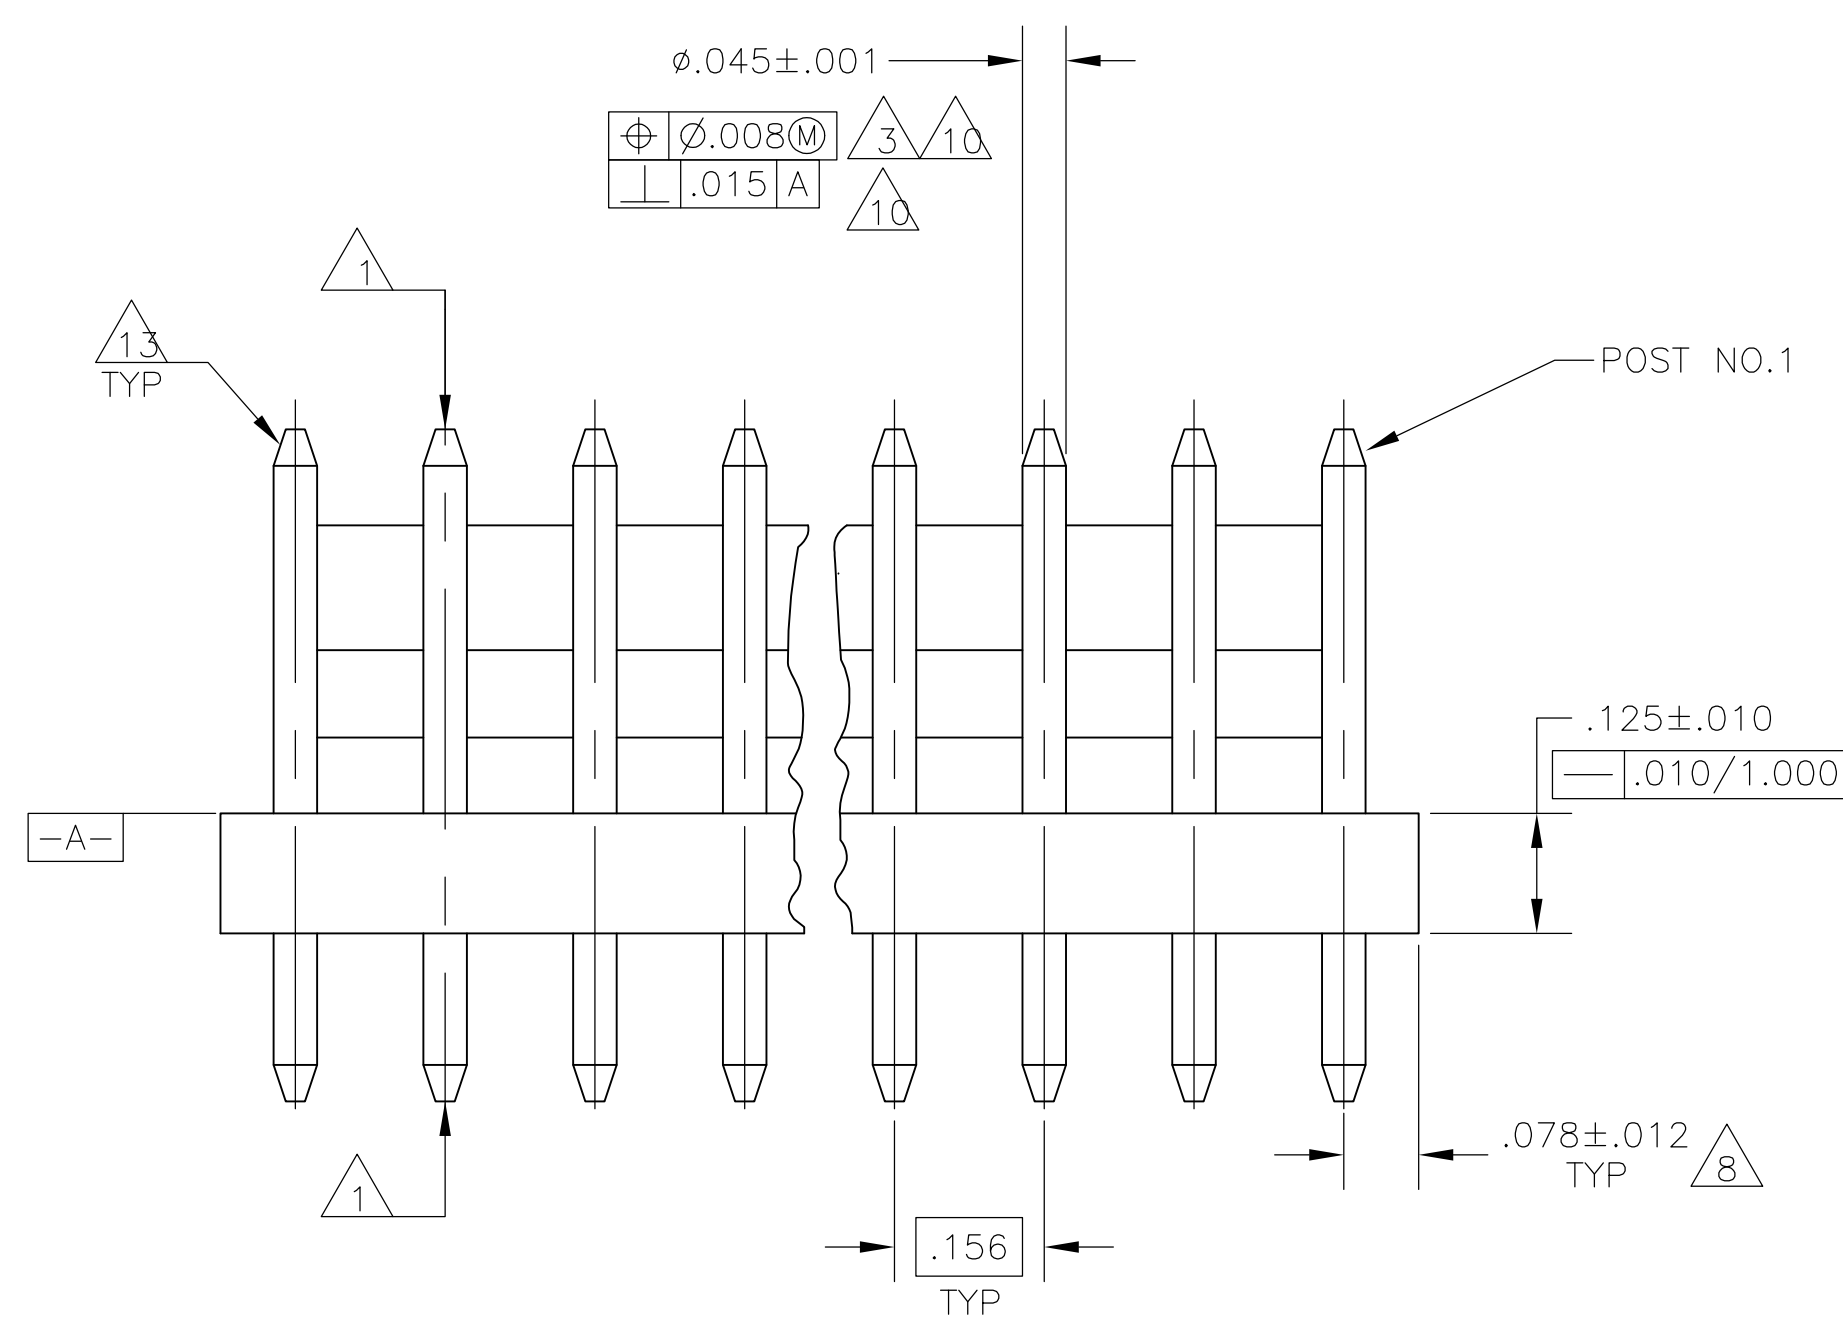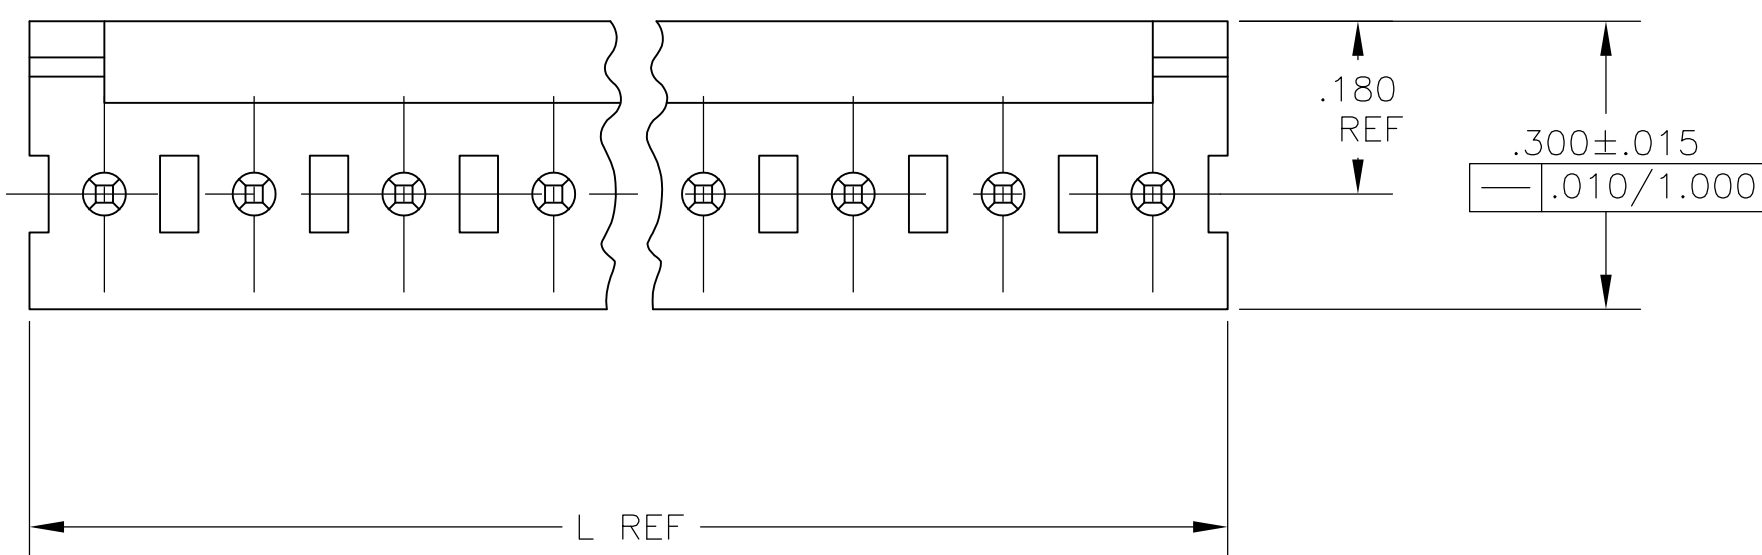

.060	1.52	1.000	25.40
.051	1.30	.750	19.05
.046	1.17	.450	11.43
.045	1.14	.425	10.80
.030	0.76	.300	7.62
.015	0.38	.180	4.57
.012	0.30	.175	4.45
.010	0.25	.156	3.96
.008	0.20	.125	3.18
.005	0.13	.078	1.98
.003	0.08	.073	1.85
.001	0.03	.068	1.73
.000	0.00	.063	1.60
[IN]	MM	[IN]	MM

CONVERSION TABLE

(F1) RECOMMENDED MOUNTING HOLE PATTERN
FOR .109±0.016 THICK P.C.BOARD 2

95.10	3.744	24	2-644753-4
91.14	3.588	23	2-644753-3
87.17	3.432	22	2-644753-2
83.21	3.276	21	2-644753-1
79.25	3.120	20	2-644753-0
75.29	2.964	19	1-644753-9
71.32	2.808	18	1-644753-8
67.36	2.652	17	1-644753-7
63.40	2.496	16	1-644753-6
59.44	2.340	15	1-644753-5
55.47	2.184	14	1-644753-4
51.51	2.028	13	1-644753-3
47.55	1.872	12	1-644753-2
43.59	1.716	11	1-644753-1
39.62	1.560	10	1-644753-0
35.66	1.404	9	644753-9
31.70	1.248	8	644753-8
27.74	1.092	7	644753-7
23.77	.936	6	644753-6
19.81	.780	5	644753-5
15.85	.624	4	644753-4
11.89	.468	3	644753-3
7.92	.312	2	644753-2
MM	[IN]	NUMBER OF POSITIONS	PART NUMBER
L			

THIS DRAWING IS A CONTROLLED DOCUMENT.		DN: S. HOOVER QIR: D. BOSSI 07N0V02		 TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED: D. BOSSI 07N0V02 APVD D. BOSSI PRODUCT SPEC		NAME	
 0 PLC 1 PLC 2 PLC 3 PLC 4 PLC ANGLES: 4		APPLICATION SPEC —		MTA-.156 HEADER ASSEMBLY, FRICTION LOCK, STRAIGHT .045 ROUND POST, TIN PLATED, SPECIAL	
MATERIAL		WEIGHT		SIZE: CAGE CODE: DRAWING NO: RESTRICTED	
				A1 00779 C=644753	
CUSTOMER DRAWING		SCALE		SHEET 1 OF 1 REV F	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-644753-1](#)