



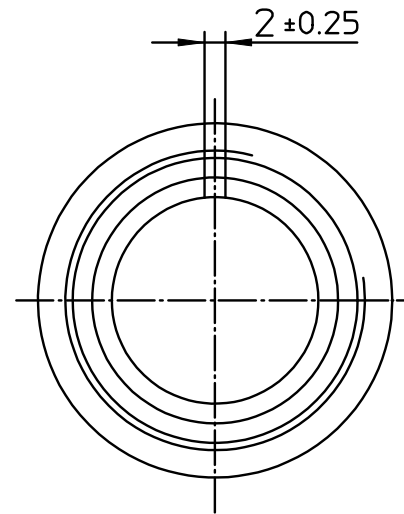

| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A   | 37.4              |
| B   | 1 1/4-18NEF-2B    |
| C   | 19.8              |
| D   | 1 3/16-18NEF-2A   |
| E   | 9.5               |
| F   | 55                |

| NO. | BESCHREIBUNG / DESCRIPTION              |
|-----|-----------------------------------------|
| 2   | ISOLIERKÖRPER BUCHSE / INSULATOR SOCKET |
| 3   | DICHTKÖRPER / GROMMET                   |
| 4   | ENDRING / ENDRING                       |
| 6   | KONTAKTBUCHSE / CONTACT SOCKET          |
| 7   | ZYLINDERGHÄUSE / BARREL                 |
| 9   | ÜBERWURFMUTTER / COUPLING NUT           |
| 14  | F-ENDGEHÄUSE / F-ENDBELL                |



Note: Due to an automatic nomenclature system, numbers generated may not be sequential.

Specification and Dimensions subject to change  
Drawings illustrate normal insulator positioning

|                         |                                                  |
|-------------------------|--------------------------------------------------|
| Material Specification: |                                                  |
| Shell Material:         | Aluminium alloy                                  |
| Shell Plating:          | Olive drab chromate coating over cadmium plating |
| Insulator Material:     | Neoprene                                         |
| Contact Material:       | Copper alloy                                     |
| Contact Plating:        | Hard silver                                      |

|                                                                                                                                                                                                     |  |                                                                                                |                            |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|------------------------------------------------------------------------------------------------|----------------------------|
| all dimensions are in mm<br>Dimensions without tolerance indications are general tolerances in acc. with DIN7168m                                                                                   |  | drawing for<br>CUSTOMER                                                                        |                            |
| <br><b>ITT</b><br><i>Engineered for life</i><br><small>ITT CANNON GmbH<br/>D - 71364 Weinstadt/Germany</small> |  | description CA3106F20-27SX                                                                     |                            |
|                                                                                                                                                                                                     |  | Plug, straight<br>Endbell for flex tube<br>Solder Cup / Socket / Layout: 20-27                 |                            |
| <small>© All rights reserved. Reproduction or issue to third in any form<br/>whenever is only permitted with written authorization of ITT Cannon</small>                                            |  |  page 1/1 | revision<br>857 24. Jan 19 |