


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	REVISED PER ECR-16-003314	15JUL2016	BW	GJ




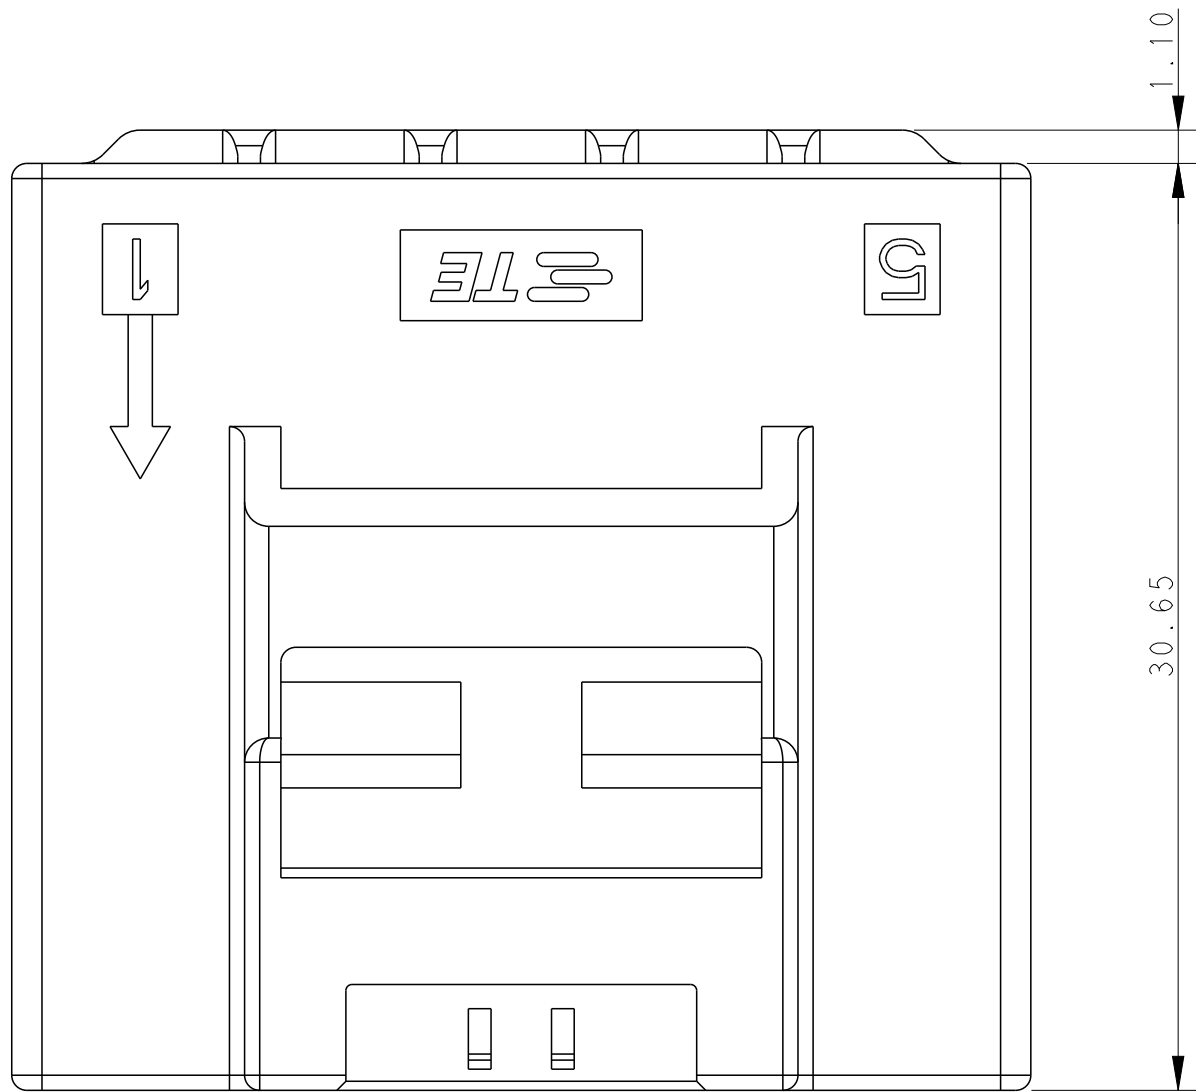


- 1 MATERIAL:
LEVEL 1:PBT, STANDARD TEMPERATURE 105°C
KEY A:NATURAL; KEY B:PURPLE; KEY C:BLUE; KEY D:YELLOW

LEVEL 2:NYLON, HIGH TEMPERATURE 150°C
KEY A:LIGHT GREY; KEY B:RED; KEY C:BLACK; KEY D:NATURAL
- 2 MATERIAL MARK:
LEVEL 1:PBT, LEVEL 2:HDT

- 3 APPLICABLE CONTACT P/N
TAB CONTACT:1971238/1971780/82/84/86/88-*,2238067-*
- 4 MATING CONN, P/N
PLUG HSG:*-1971876-
TPA DOUBLE ROW TPA:*-1971778-*;SINGLE ROW TPA:*-1971777-*







5 THIS PRODUCT HAS NOT COMPLETED VALIDATION TESTING

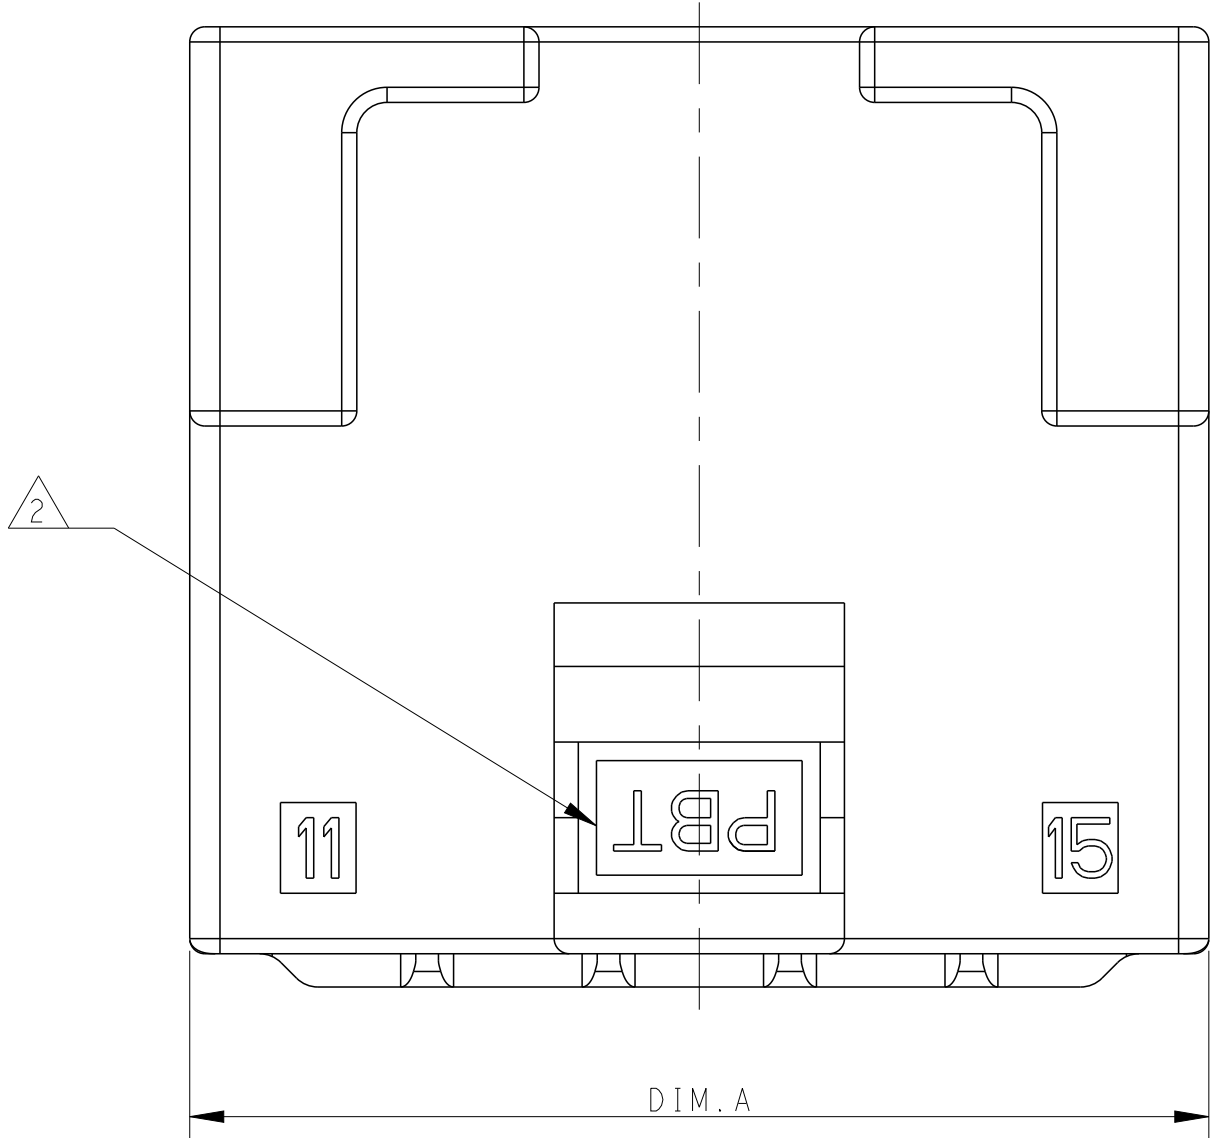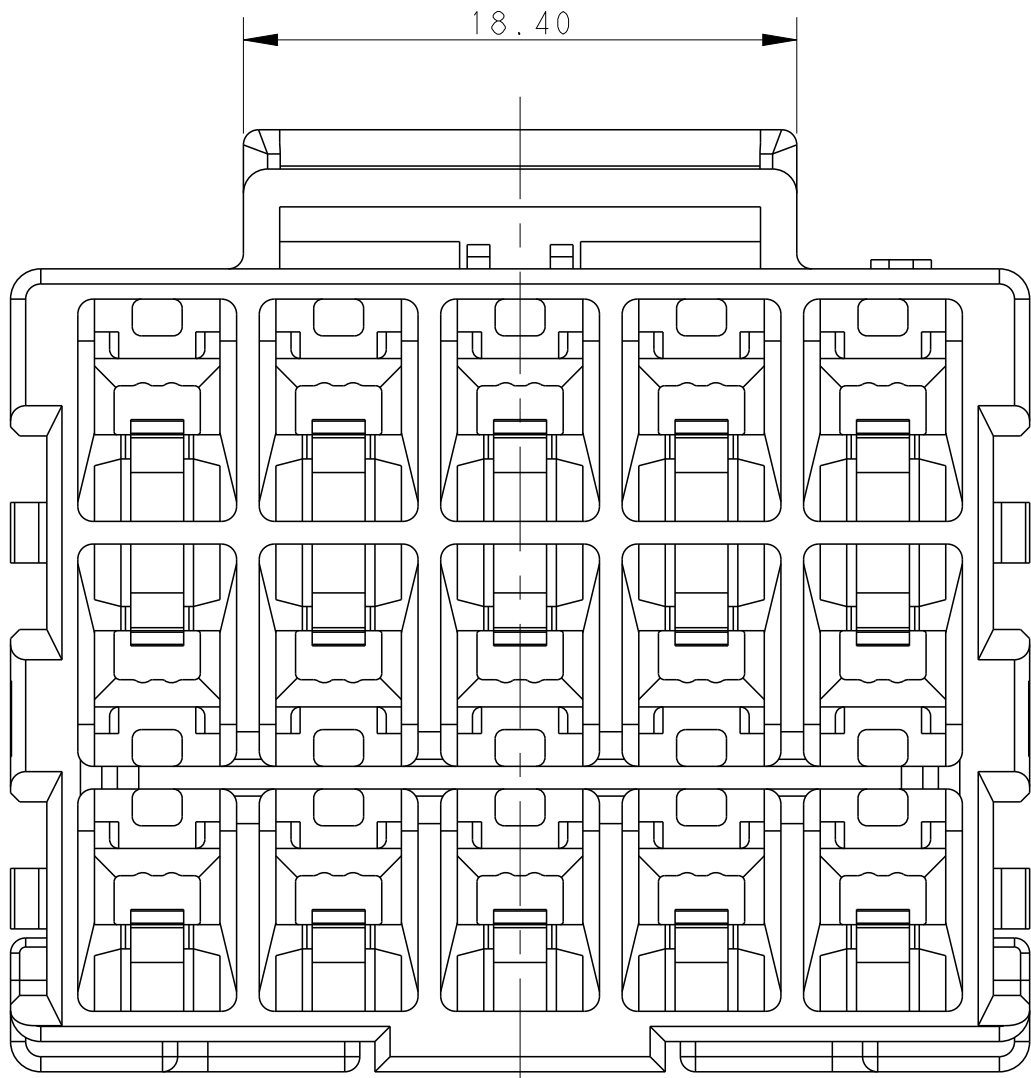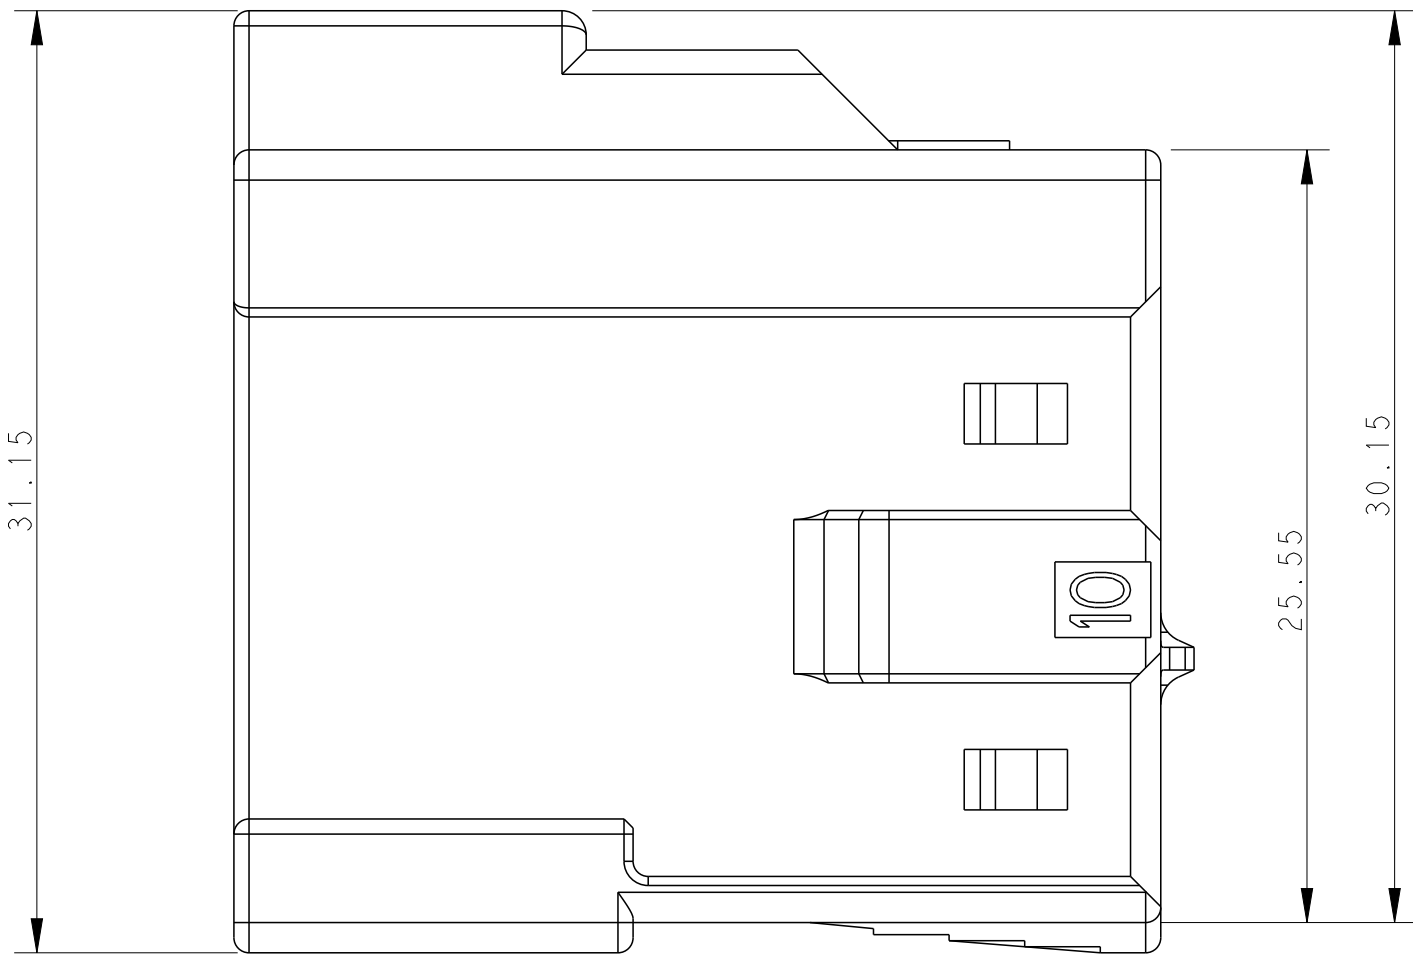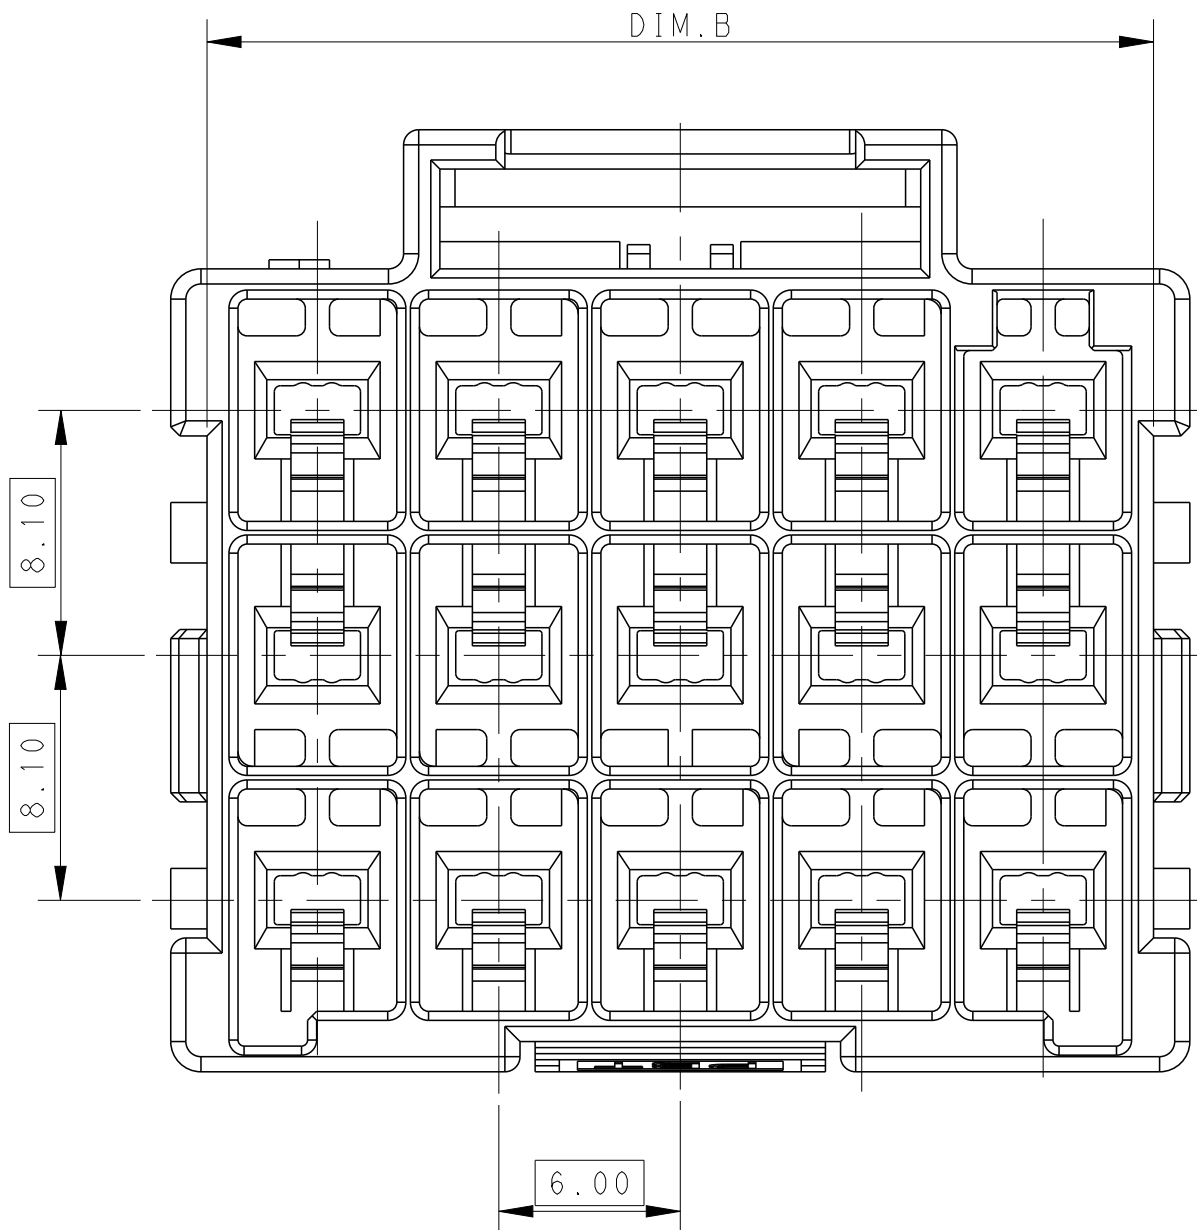

POS.	DIM.A	DIM.B
3*5	33.70	31.30
3*4	27.70	25.30
3*3	21.70	19.30

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN	TOMMY_WU		09JUL2012		 TE Connectivity CAP HOUSING, FREE HANGING, TRIPLE ROW POWER TRIPLE LOCK									
			CHK	HAPYE_WU		09JUL2012											
			APVD	YUHONG_MAO		09JUL2012											
			NAME														
DIMENSIONS:			TOLERANCES UNLESS OTHERWISE SPECIFIED:					SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO			
mm			0 PLC ±0.35					PRODUCT SPEC		A1		00779C		1971874		-	
			1 PLC ±0.25					108-106118									
			2 PLC ±					APPLICATION SPEC									
			3 PLC ±					114-106118									
			4 PLC ±														
			ANGLES ±														
			FINISH														
MATERIAL			WEIGHT														
			-					Customer Drawing						SCALE		-	
			-											SHEET		1	
			-											OF		2	
			-											REV		C	

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

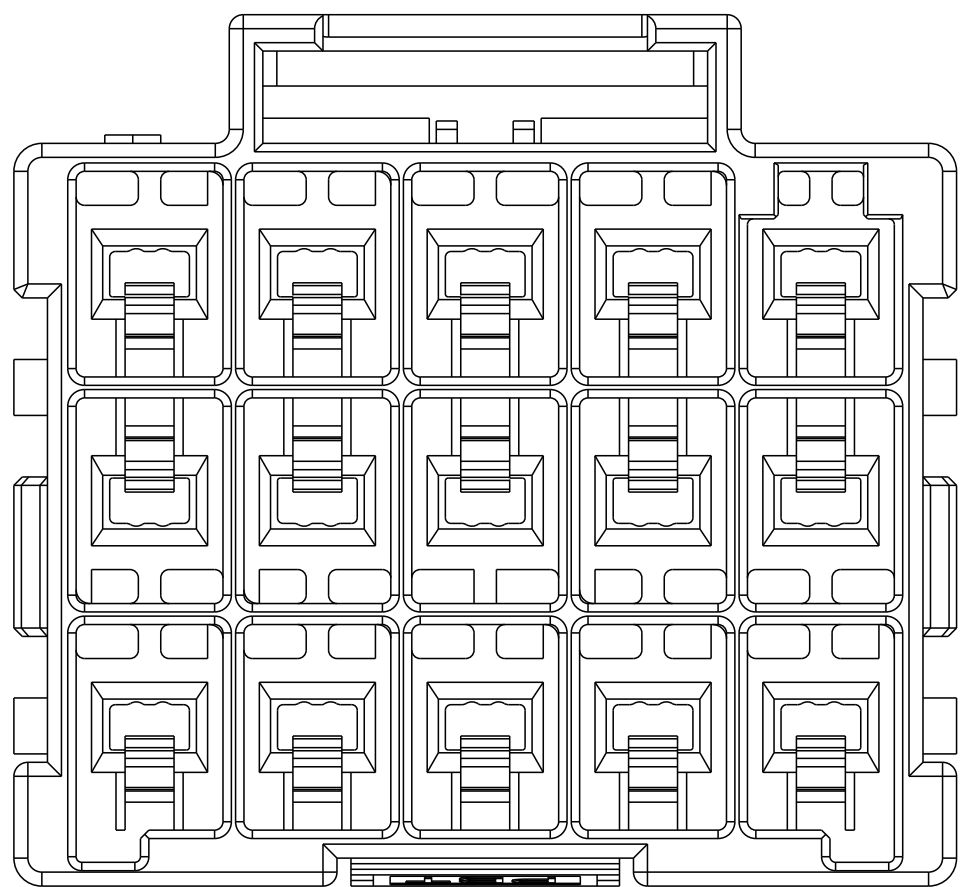
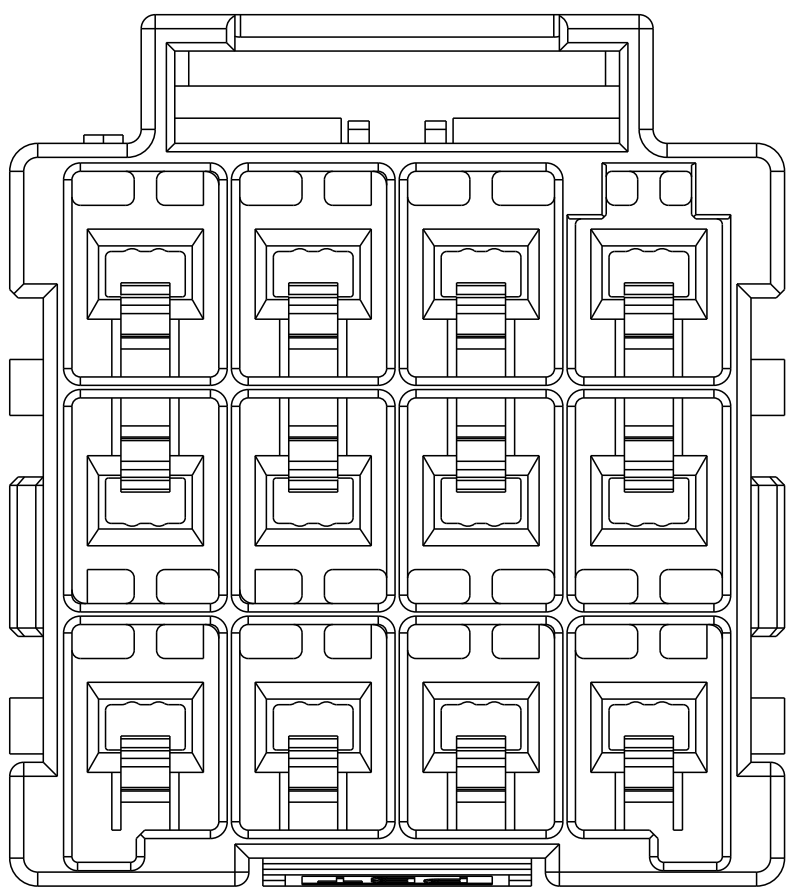
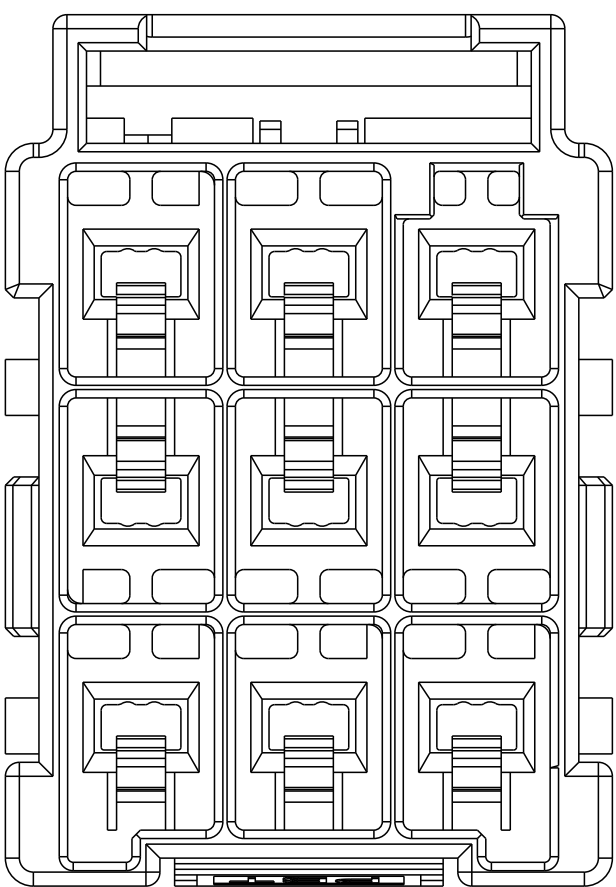
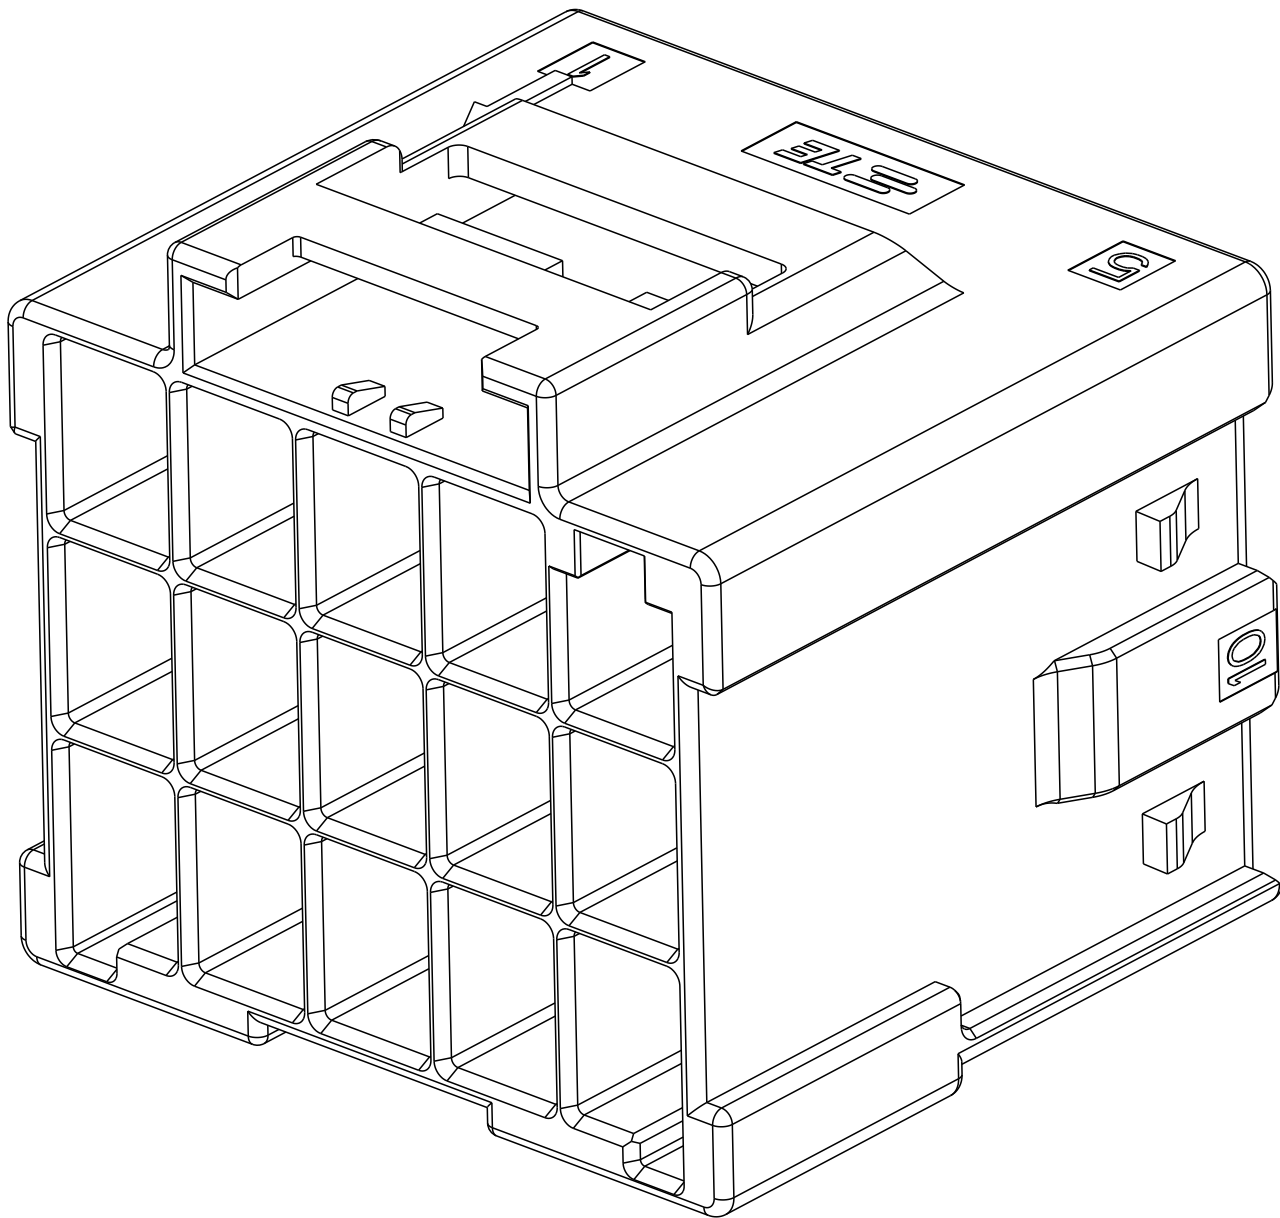
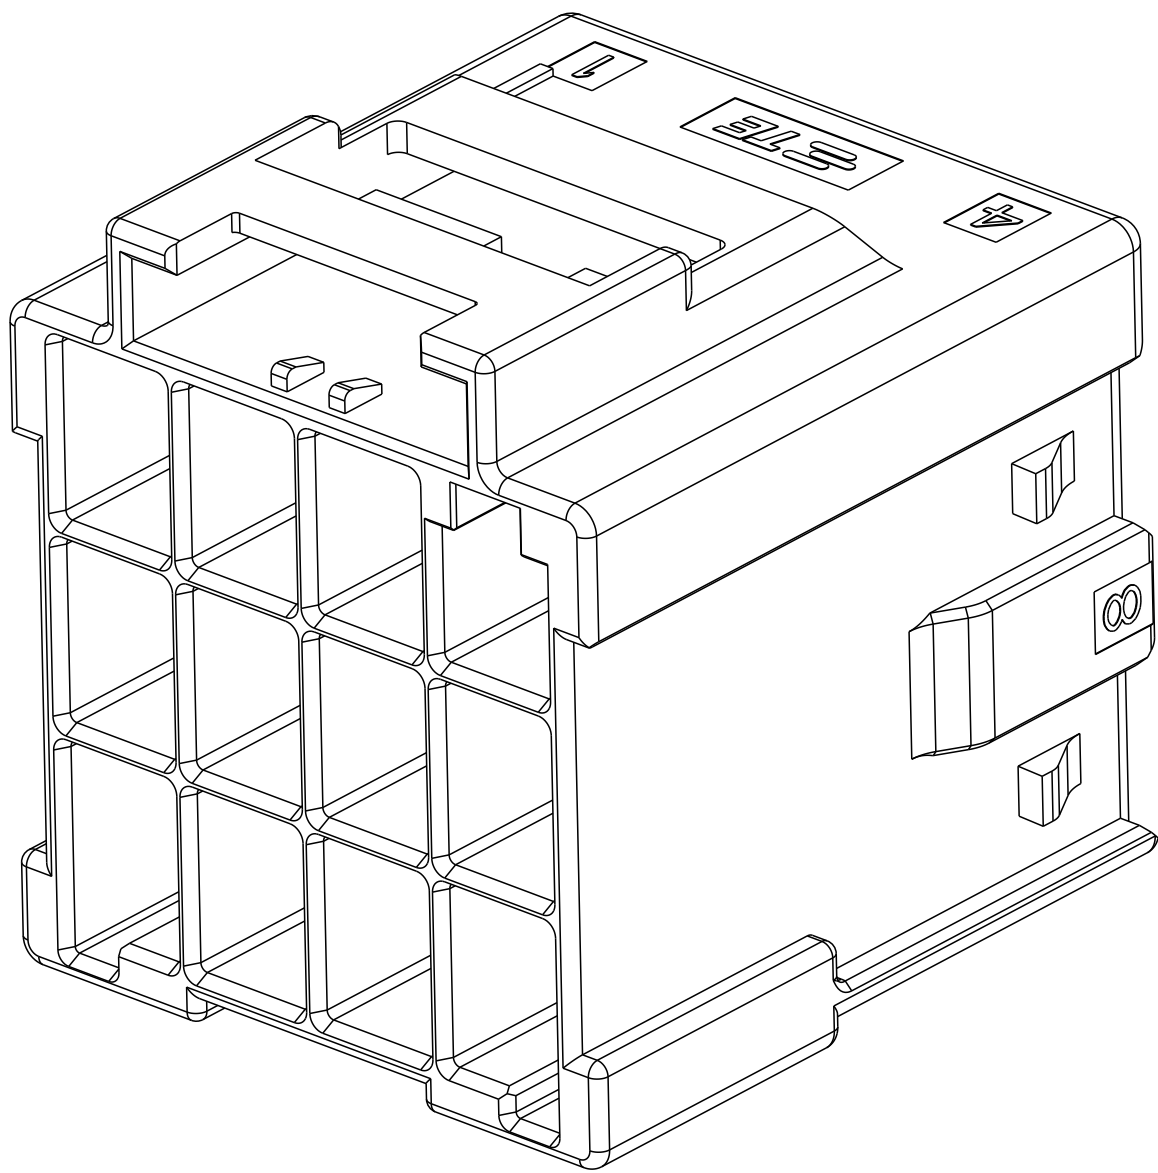
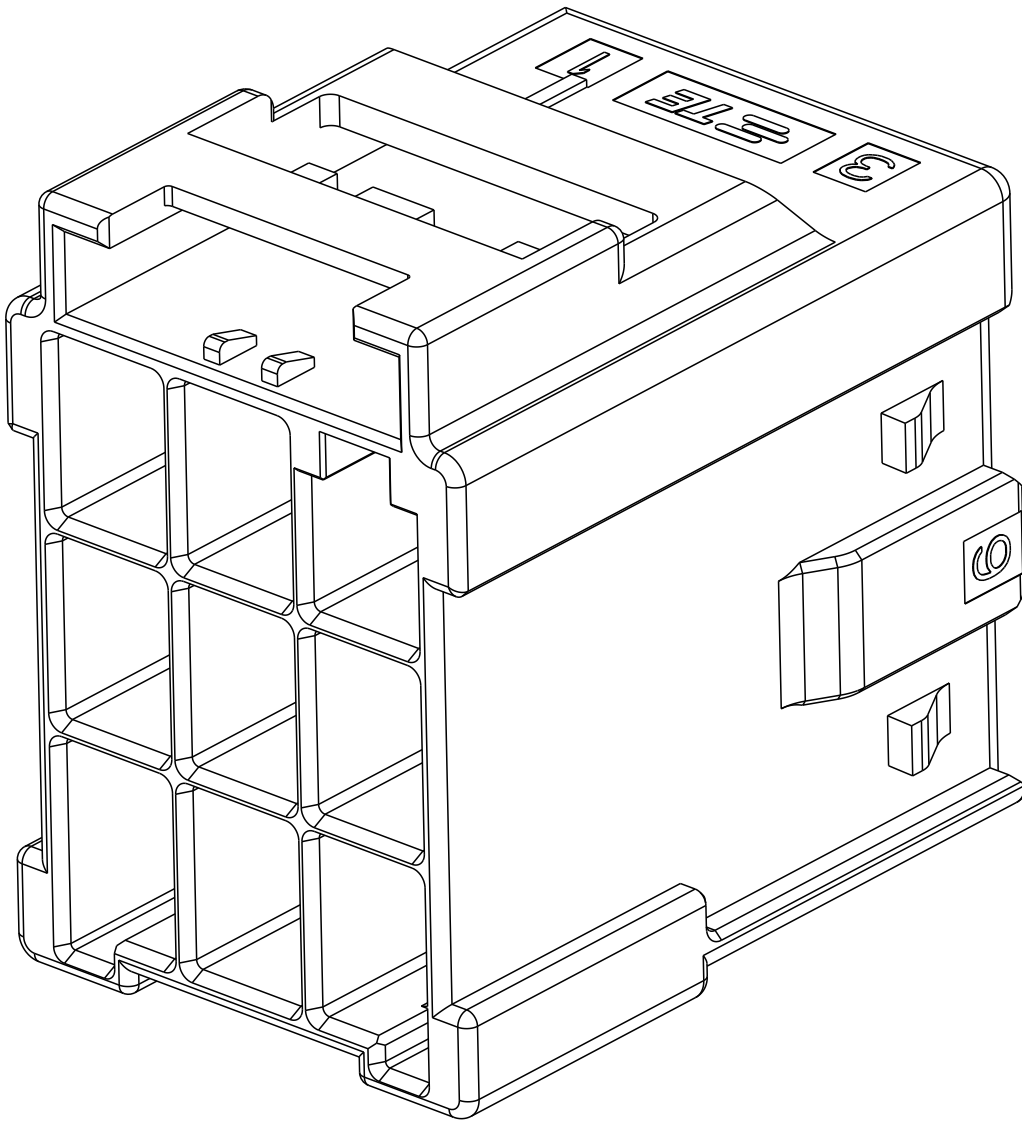


3*5	LEVEL 1	KEY A	1-1971874-7
		KEY B	2-1971874-7
		KEY C	3-1971874-7
		KEY D	4-1971874-7
	LEVEL 2	KEY A	5-1971874-7
		KEY B	6-1971874-7
		KEY C	7-1971874-7
		KEY D	8-1971874-7
3*4	LEVEL 1	KEY A	1-1971874-4
		KEY B	2-1971874-4
		KEY C	3-1971874-4
		KEY D	4-1971874-4
	LEVEL 2	KEY A	5-1971874-4
		KEY B	6-1971874-4
		KEY C	7-1971874-4
		KEY D	8-1971874-4
3*3	LEVEL 1	KEY A	1-1971874-3
		KEY B	2-1971874-3
		KEY C	3-1971874-3
		KEY D	4-1971874-3
	LEVEL 2	KEY A	5-1971874-3
		KEY B	6-1971874-3
		KEY C	7-1971874-3
		KEY D	8-1971874-3
POS.	MATERIAL	KEY	P/N

3*3 POSITIONS

3*4 POSITIONS

3*5 POSITIONS

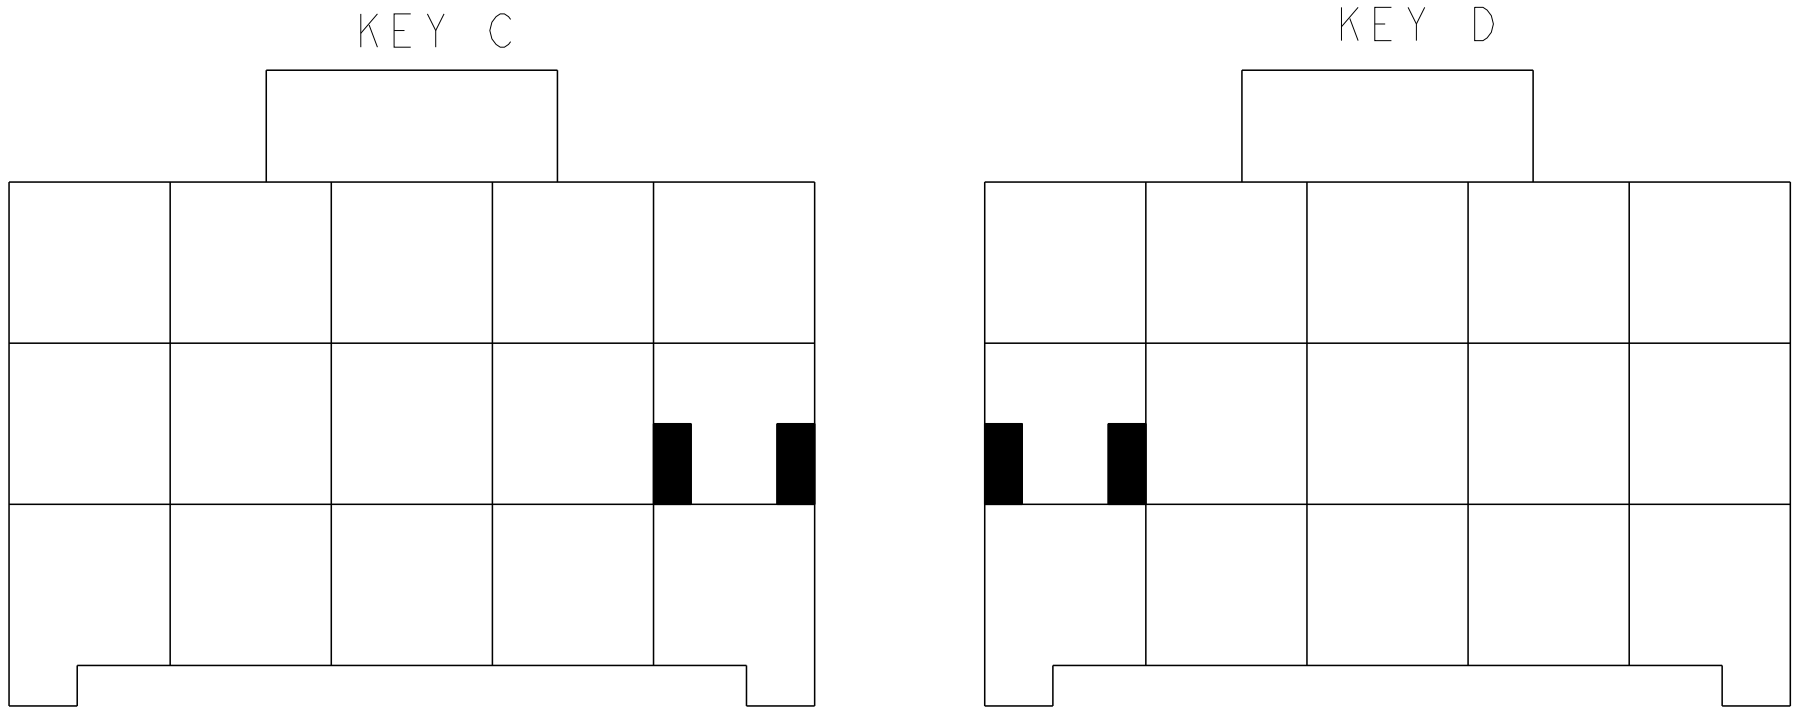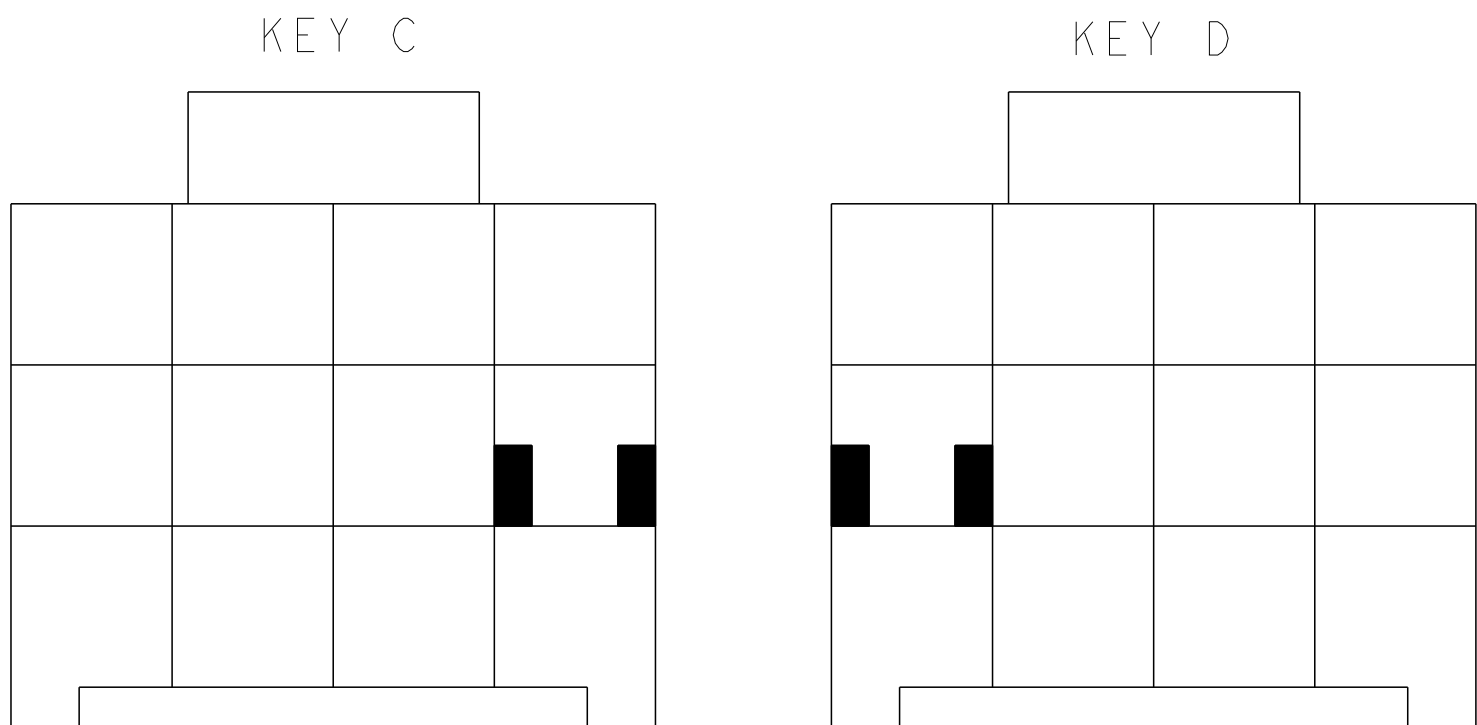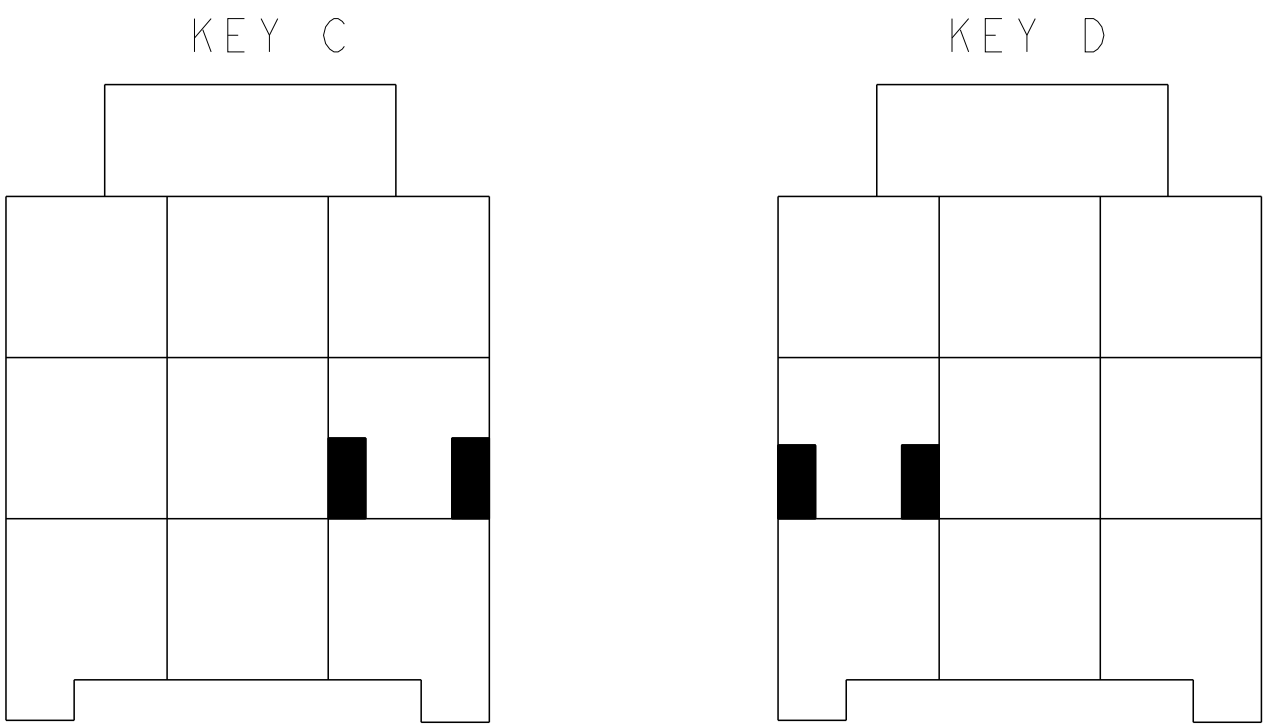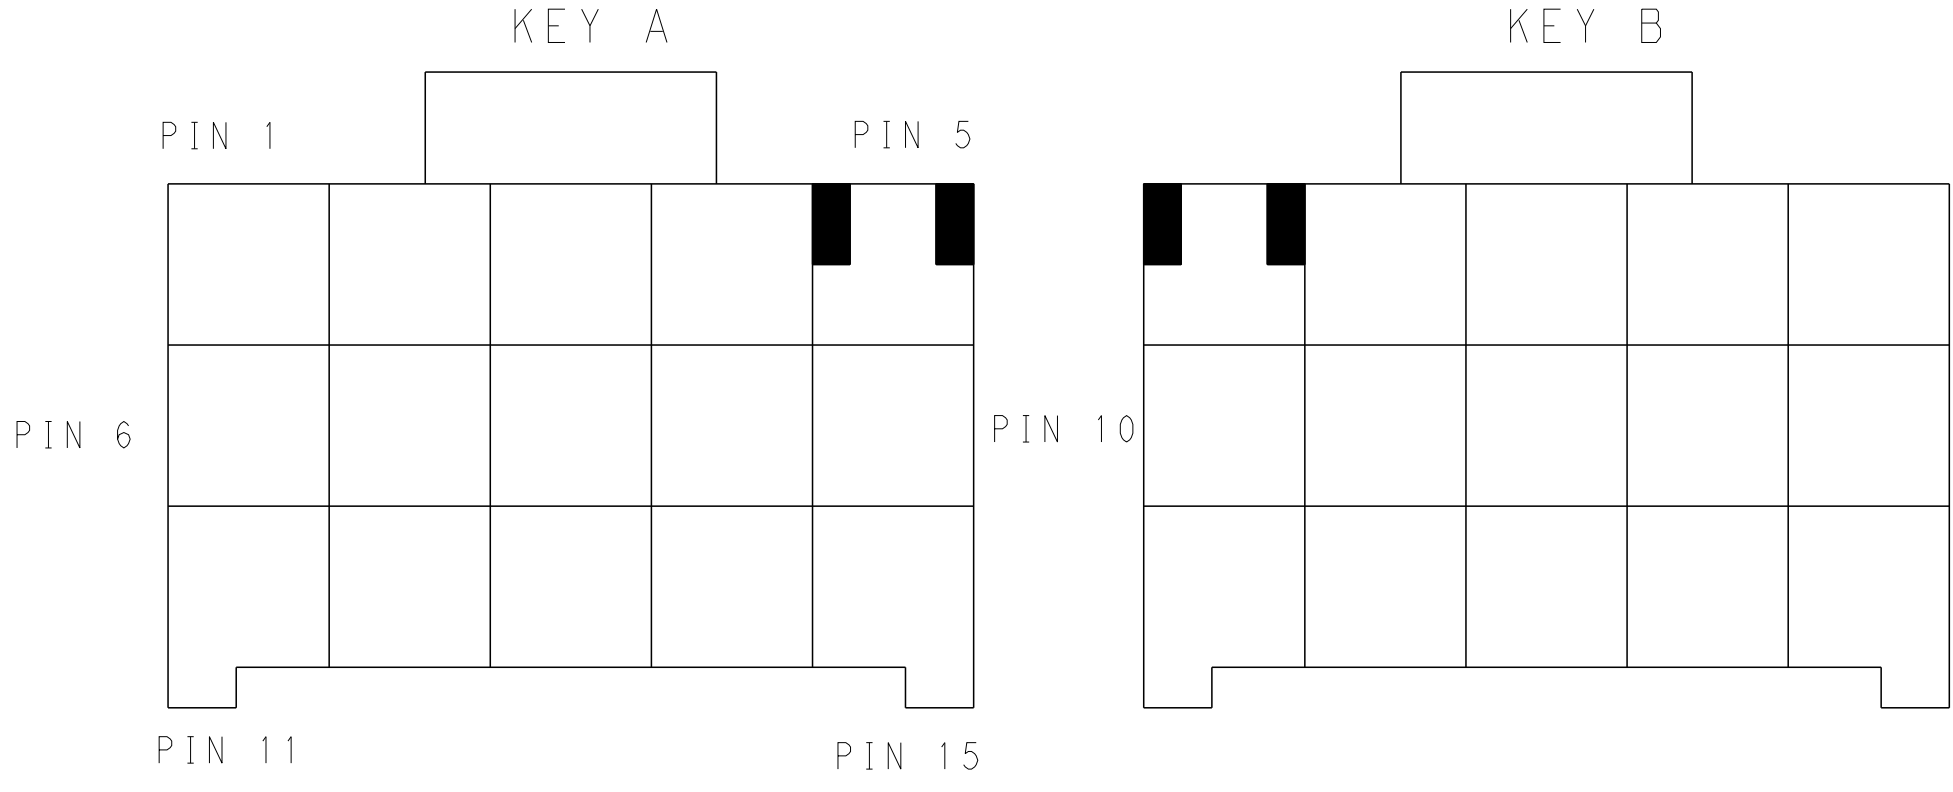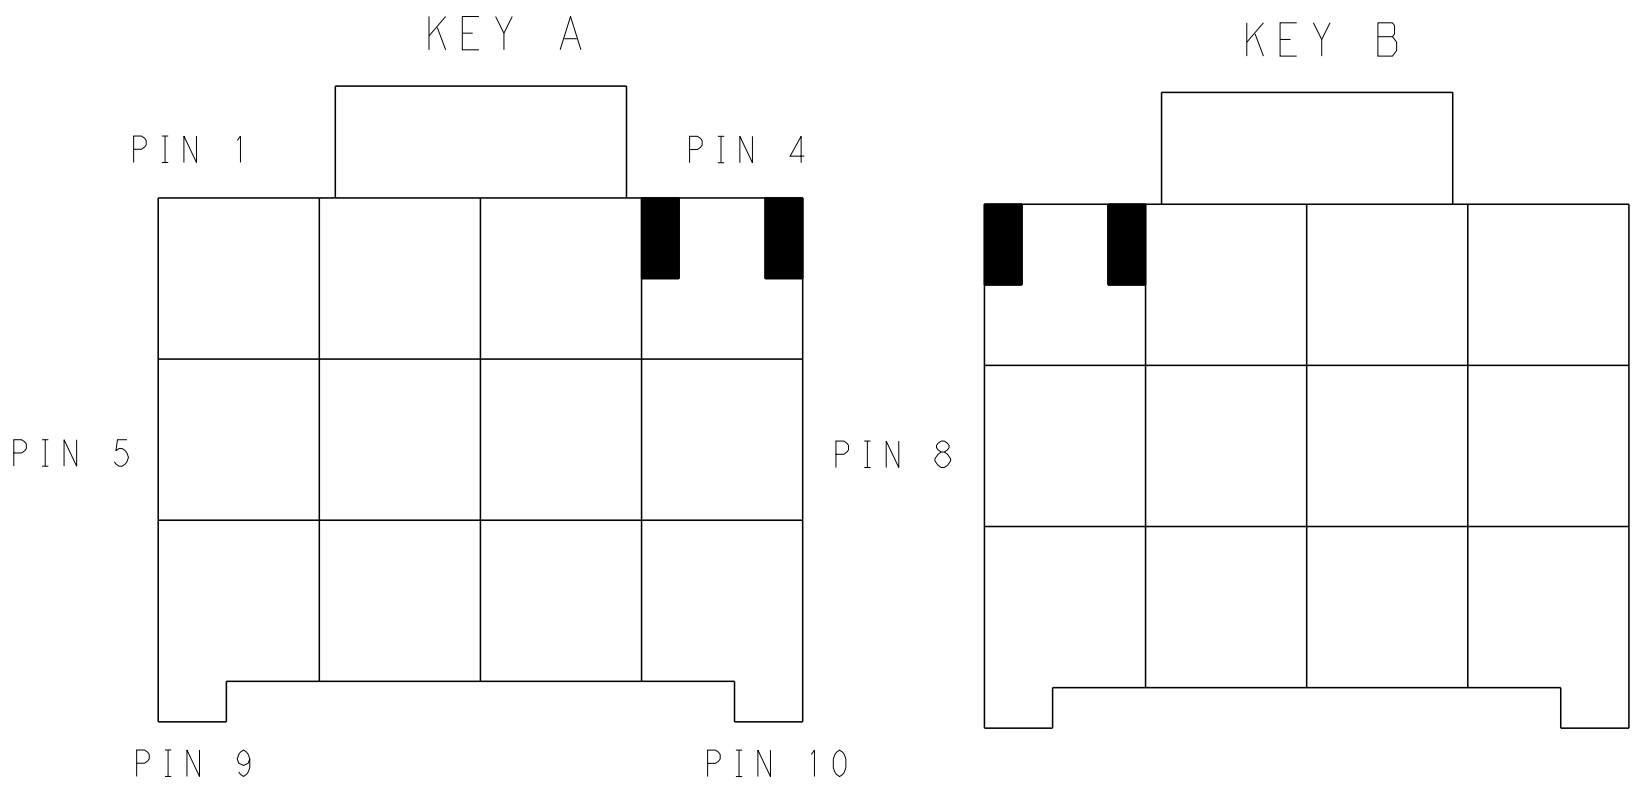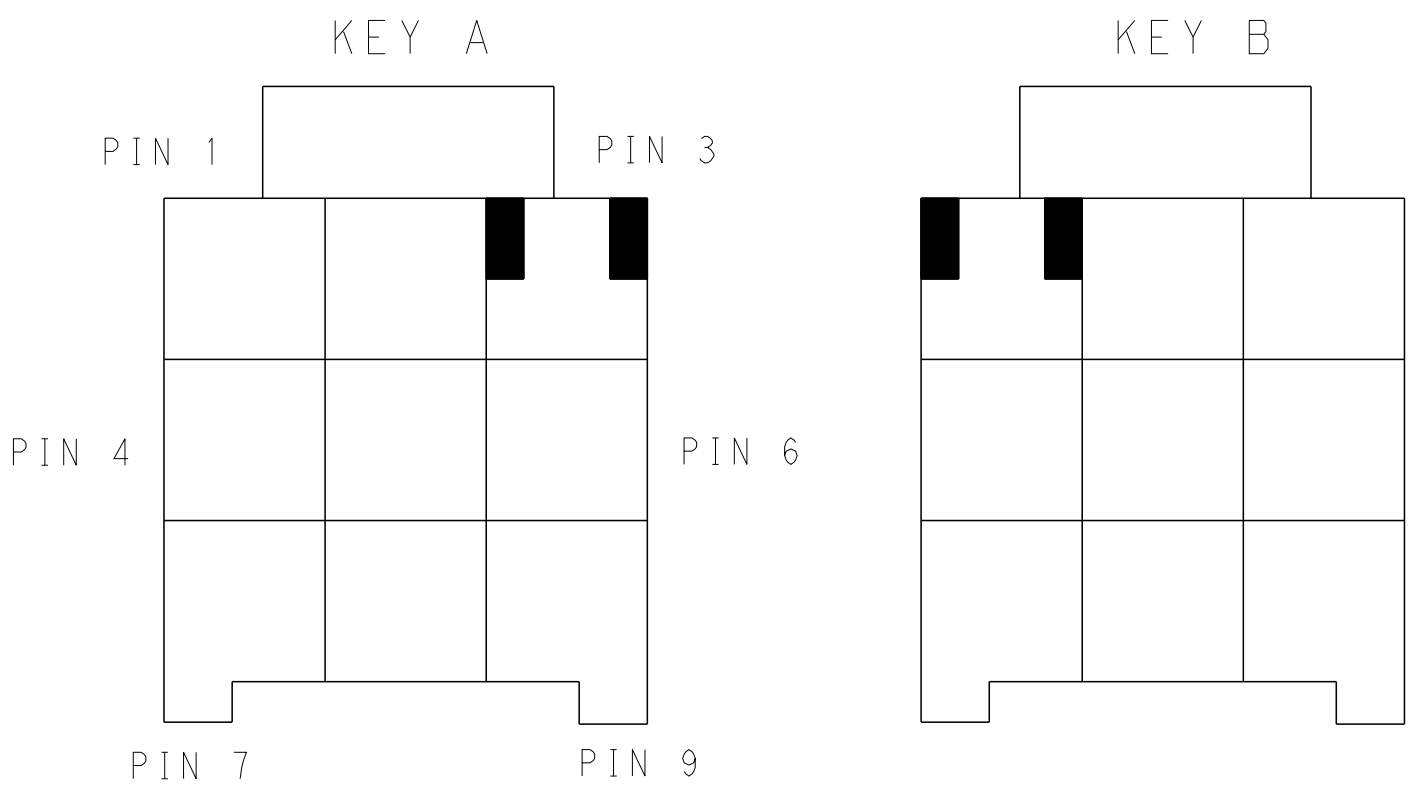

KEYING FOR 3*3 POS.

KEYING FOR 3*4 POS.

KEYING FOR 3*5 POS.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN TOMMY WU 09JUL2012

CHK HAPYE WU 09JUL2012

APVD YUHONG MAO 09JUL2012

DIMENSIONS:

mm

0 PLC ±.035

1 PLC ±0.25

2 PLC ±.035

3 PLC ±.035

4 PLC ±.035

ANGLES ±.035

FINISH -

MATERIAL

Customer Drawing

PRODUCT SPEC

108-106118

APPLICATION SPEC

114-106118

WEIGHT

-

NAME

CAP HOUSING, FREE HANGING, TRIPLE ROW POWER TRIPLE LOCK

SIZE

CAGE CODE

DRAWING NO

100779

©=1971874

RESTRICTED TO

-

SCALE

-

SHEET

2

OF

2

REV

C

TE Connectivity

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[8-1971874-4](#)