



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

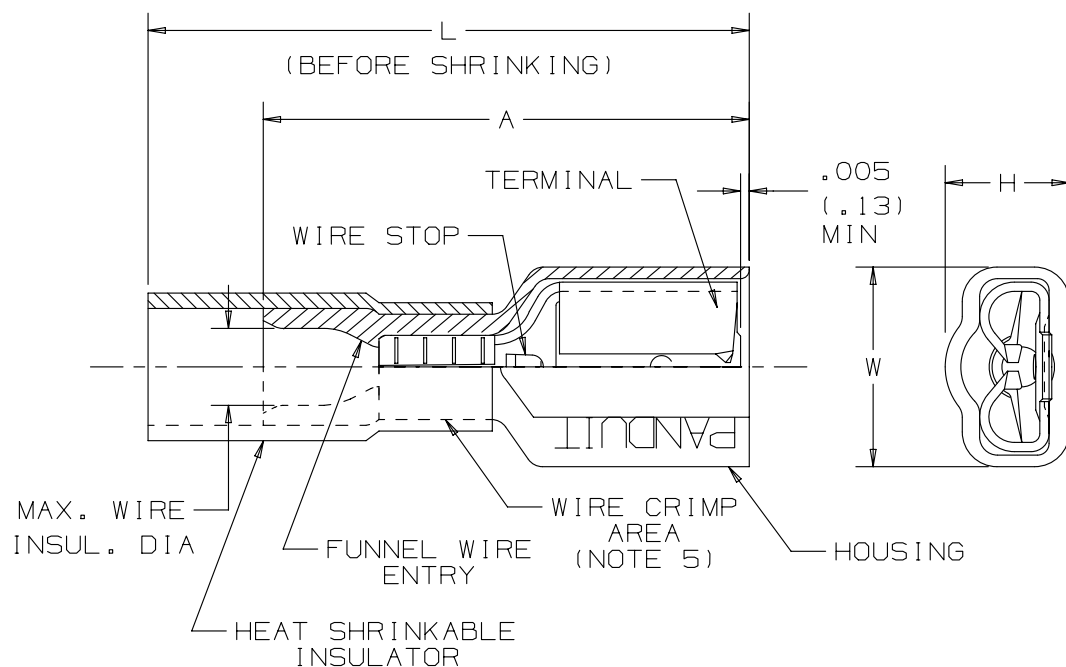

NOTES :

1. FOR USE WITH STRANDED COPPER WIRE ONLY
(SEE TABLE FOR WIRE RANGE)
2. MATERIAL:
 - A. TERMINAL - CDA 260 BRASS, TIN PLATED
 - B. HOUSING - TYPE 66 NYLON
 - C. INSULATOR - HEAT SHRINKABLE POLYOLEFIN
WITH HOT MELT SEALANT
3. MINIMUM SHRINK TEMPERATURE: 250°F (120°C)
4. ALL DIMENSIONS SHOWN ARE NOMINAL.
DIMENSIONS IN BRACKETS ARE IN MILLIMETERS.
5. PART NUMBER DNH10-250F1 IS CONSTRUCTED
WITH A BRASS SLEEVE IN WIRE CRIMP AREA.
6. INSTALLATION TOOL: CT-310
7. PKG. QTY. : STD. PKG. -Q=25
 -E=20
 BULK PKG. -D=500
 -T=200
8. Maximum continous operating
temperature 230°F (110° C)
9. Minimum continous operating
temperature -65°F (-55° C)

PART NUMBER		TAB SIZE	WIRE RANGE AWG	HOUSING COLOR	MAX. INSUL. DIA	DIMENSIONS				STRIP LENGTH
						A	W	H	L	
DNH18-250F1B	-Q -D	.250 X .032 (6.3 X 0.8)	22-18	RED	.132 (3.35)	.84 (21.3)	.35 (8.9)	.22 (5.5)	1.44 (36.6)	9/32 (7.1)
DNH14-250F1B	-Q -D	.250 X .032 (6.3 X 0.8)	16-14	BLUE	.156 (3.96)	.84 (21.3)	.35 (8.9)	.22 (5.5)	1.44 (36.6)	9/32 (7.1)
DNH10-250F1	-E -T	.250 X .032 (6.3 X 0.8)	12-10	YELLOW	.230 (5.84)	.96 (24.4)	.35 (8.9)	.27 (6.9)	1.44 (36.6)	3/8 (9.5)

										TITLE					HEAT SHRINK FULLY INSULATED FEMALE DISCONNECTS												
															CUSTOMER DRAWING												
										ITEM REVISION NAME					N41458BA/07												
										DATASET FILE NAME					N41458BA_DC/07A												
										UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]					MATERIAL:												
										.X ± .1 [2.54] .XXX ± .005 [.127]					SEE NOTES												
										.XX ± .01 [.25] ANGLES ± 5 °					DRAWING NUMBER:												
										 THIRD ANGLE PROJECTION					A41458												
07	04-25-13	JBN	RTFI	RTFI	UPDATED DRAWING BORDER & TITLE BLOCK				A41458				DRAWN BY					DATE		CHK		SCALE		SHT 1 OF 1		SIZE	
REV	DATE	BY	CHK	APR	DESCRIPTION				ECN				DRL		-		-		NONE						A		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[DNH18-250FIB-Q](#) [DNH14-250FIB-Q](#)