



# **Specification Control Drawing**

a) Part as supplied.

#### 202K1\*\*-100



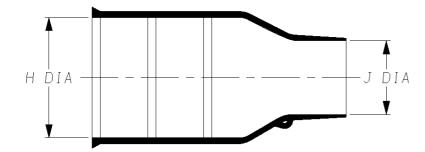

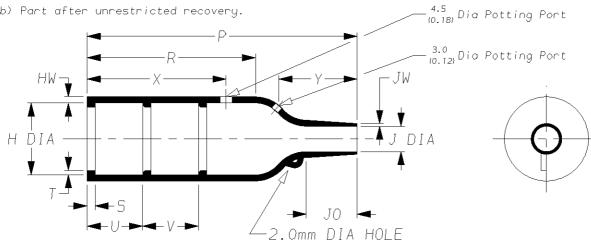

#### in millimetres (in inches,for reference) DIMENSIONS

	j	н		J	Ρ	R	S	Т	U& V	JO	нW	JW	Х	Y
Part No.	Min	Max	Min	Max	±10%	±10%	±10%	±10%	±10%	±10%	±20%	±20%	±20%	±20%
	a	b	a	b	b	b	b	b	b	b	b	b	b	b
) 202K121	24 {0,94}	10.4 (0.41)	14 {0.55}	5.6 {0.22}	38 {1.50}	21 {0.83}	3.0 {0.12}	1.0 {0.04}	12 {0.47}	8.5 (0.33)	1.6 (0.06)	0.9 {0.04}	24 {0,94} (2)	13 {0.51
) 202K132	30	14,2	15	5.9	55	32	3.0	1.0	12	11.5	1.8	1.0	24	18
	{1.18}	{0,56}	{0.59}	{0.23}	{2.17}	{1,26}	{0.12}	{0.04}	{0.47}	{0.45}	{0.07}	{0.04}	{0.94}	10.71
) 202K142	31	18.0	18	7.1	67	35	3.0	1.0	20	17.0	1.8	1.0	32	25
	{1,22}	(0.71}	{0.71}	{0.28}	{2.64}	{1.38}	{0.12}	{0.04}	{0.79}	{0.67}	{0.07}	{0.04}	{1.26}	{0.98
) 202K153	36	22.4	21	8.4	80	42	3.0	1.0	20	19.5	2.0	1.0	32	30
	{1,42}	(0.88)	{0.83}	{0.33}	(3.15)	{1.65}	{0.12}	{0.04}	{0.79}	(0.77)	(0.08)	{0.04}	{1.26}	{1.18
202K163	43	28.2	25	9.9	99	61	3.0	1.7	20	21.0	2.2	1.0	52	30
	{1.69}	(1.11)	{0.98}	{0.39}	(3,90)	{2,40}	{0.12}	{0.07}	{0.79}	{0.83}	(0.09)	{0.04}	{2.05}	11.18
202K174	52	35.1	39	15.7	130	72	3.0	1.7	20	39.0	3.2	1.5	52	50
	{2,05}	(1.38)	{1,54}	{0.62}	{5.12}	{2,83}	{0.12}	{0.07}	{0.79}	{1.54}	{0.13}	{0.06}	{2.05}	{1.97
202K185	66	44.5	42	16.8	170	90	3.0	2.0	20	51.5	3.8	2.0	52	70
	{2,60}	(1.75)	{1.65}	{0.66}	(6,69)	{3.54}	{0.12}	{0.08}	{0.79}	(2.03)	(0.15)	{0.08}	{2.05}	{2.76


Drawn A.LILLEY. Checked

Date February 2007 Conforms to ISO Recommendations 3rd Angle Projection Not to Scale

Issue 5

	TE Conne	Specifica <sup>ctivity</sup> Control [	tion Drawing	Part Number 202K1**-100 Issue 5				
Iss.	Date	E.C.R. No.	Detail	s of Change				
2 3 4	December 1985 May 1990 February 2007	4502 **** CR06-HM-012		was on 2 seperate drawings dimensions added				

## (Ordering Information)

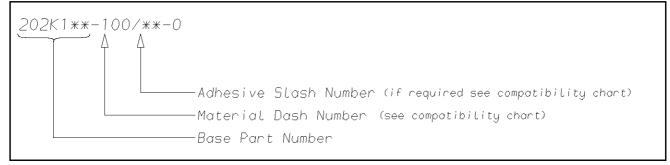

#### COMPATIBILITY CHART)

Material Dash Number	Material Description	SPEC Number	Coating Slash Number
-100	Zero Halogen	RT-1323, RK-6717	/86, /180

#### NOTES

- () Supplied with 2 lips only, Dimension V does not apply.
- Potting Port X @ 90° to Potting Port Y on 202K121.
- ③ Potting Ports are optional, when specified by suffix -00 they will be located as shown.
- (4) As supplied dimensions are for uncoated parts, when coating is added entry diameters will reduce by 1.5mm Max.
- (5) If eyelet clip (000W212) is required with part then add CS-1858 to description (i.e. 202K132-100-0-CS-1858).

England	TE Connectivity 300, Constitution Drive, Menlo Park, CA 94025 USA Telephone (650) 361–3860 Fax: (650) 361–5579
Cage Code K1010	Cage Code 06090

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity: 202K153-100/184-0