
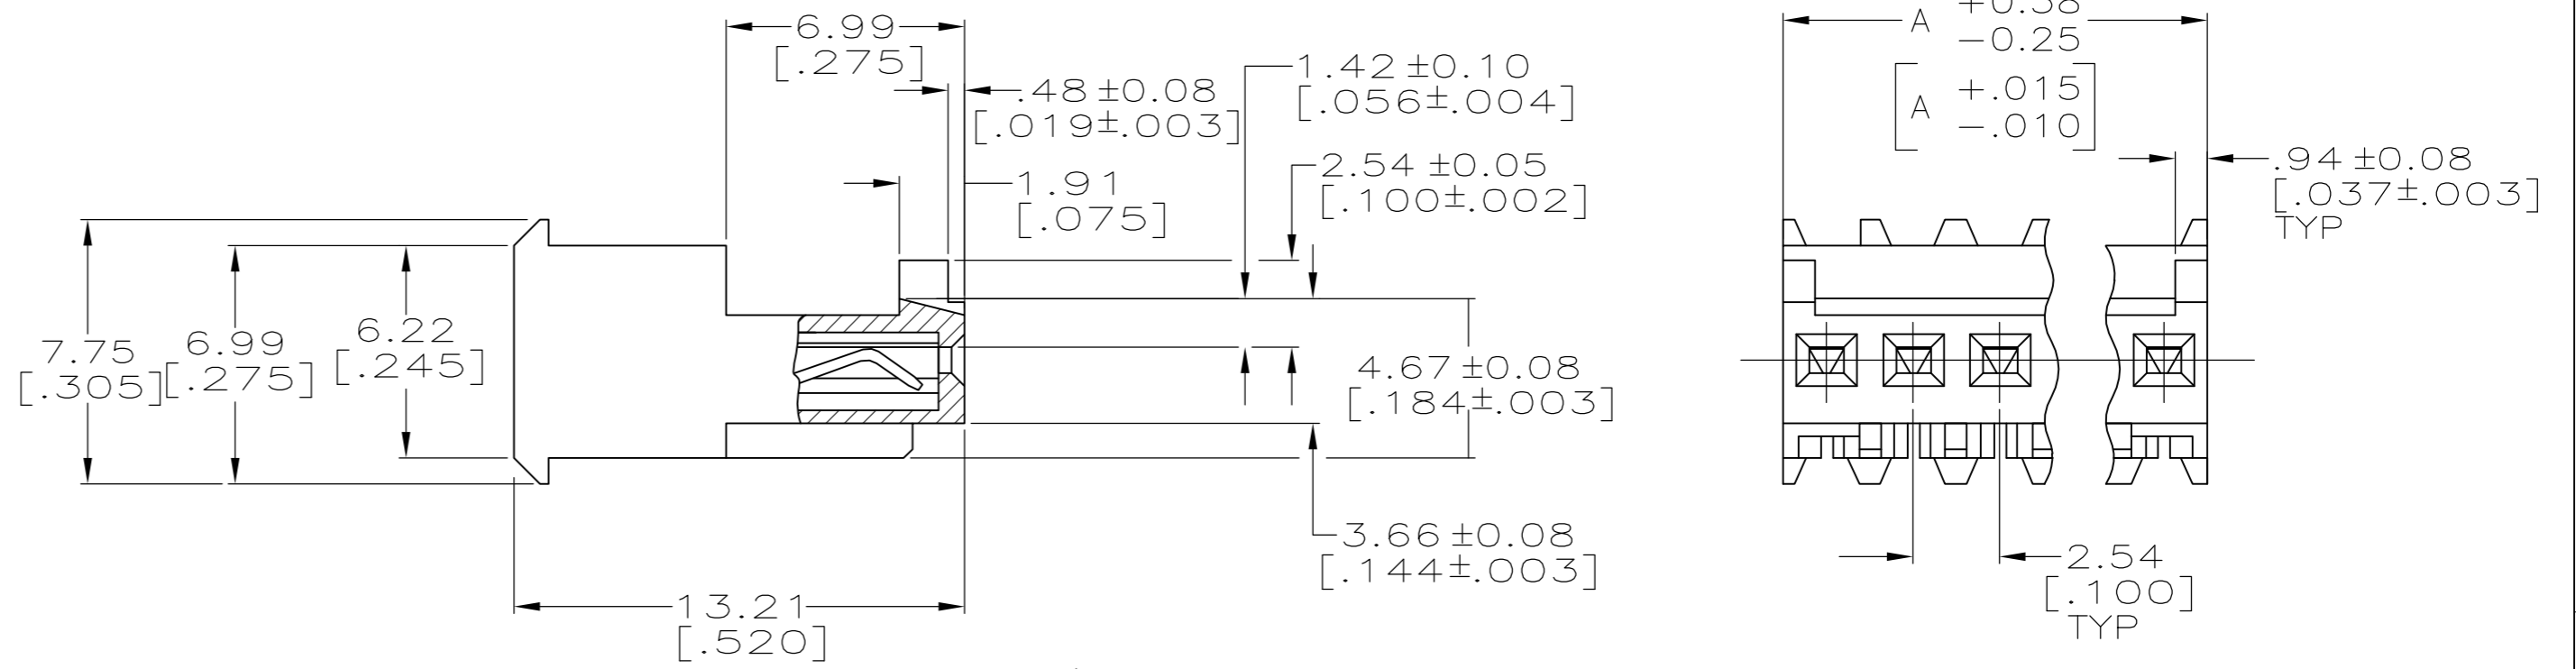


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
CM	00	E1	ECO-14-010907	25AUG2014	KR	OC	

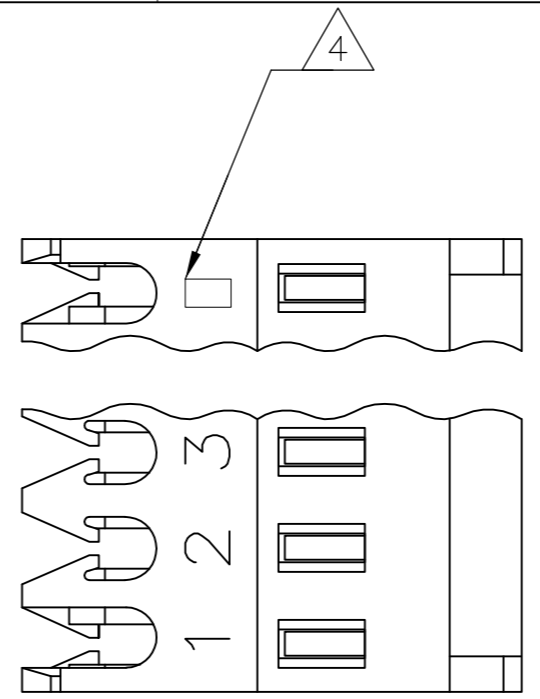

- 1 MATERIAL: CONNECTOR - NYLON UL94V-2 (RED).  
CONTACTS - 0.30[.012] THICK COPPER ALLOY BRIGHT TIN-LEAD .00203[.000080] MIN THICKNESS FOR 644540-2 THRU 2-644540-8.  
MATTE WHISKER MITIGATED TIN .00203[.000080] MIN THICKNESS OVER NICKEL UNDERPLATE FOR 3-644540-2 THRU 4-644540-5.
- 2 CONTACTS ACCEPT 22 AWG WIRE WITH 1.52[.060] MAX INSULATION DIAMETER.
- 3 CONTACTS MUST ACCEPT 0.64±0.03[.025±.001] SQUARE POST AND REMAIN LOCKED IN POSITION.
- 4 IDENTIFICATION NUMBER FOR LAST CIRCUIT MAY NOT APPEAR ON ALL ASSEMBLIES.
- 5 DIMENSIONS IN BRACKETS ARE IN INCHES.
- 6 HOUSING FEATURES ARE: FEED THRU WITH LOCKING RAMP AND WITH POLARIZING TAB.
- 7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

LEADFREE	DIM A	NO. OF CIRCUITS	PART NO.
YES	38.10[1.500]	15	4-644540-5
YES	35.56[1.400]	14	4-644540-4
YES	33.02[1.300]	13	4-644540-3
YES	30.48[1.200]	12	4-644540-2
YES	27.94[1.100]	11	4-644540-1
YES	25.40[1.000]	10	4-644540-0
YES	22.86[.900]	9	3-644540-9
YES	20.32[.800]	8	3-644540-8
YES	17.78[.700]	7	3-644540-7
YES	15.24[.600]	6	3-644540-6
YES	12.70[.500]	5	3-644540-5
YES	10.16[.400]	4	3-644540-4
YES	7.62[.300]	3	3-644540-3
YES	5.08[.200]	2	3-644540-2
NO	38.10[1.500]	15	1-644540-5
NO	35.56[1.400]	14	1-644540-4
NO	33.02[1.300]	13	1-644540-3
NO	30.48[1.200]	12	1-644540-2
NO	27.94[1.100]	11	1-644540-1
NO	25.40[1.000]	10	1-644540-0
NO	22.86[.900]	9	644540-9
NO	20.32[.800]	8	644540-8
NO	17.78[.700]	7	644540-7
NO	15.24[.600]	6	644540-6
NO	12.70[.500]	5	644540-5
NO	10.16[.400]	4	644540-4
NO	7.62[.300]	3	644540-3
NO	5.08[.200]	2	644540-2

SUPERSEDED BY 4-644540-5  
 SUPERSEDED BY 4-644540-3  
 SUPERSEDED BY 4-644540-0

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. CARPENTER 12JUN2003		TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK D. BOSSI 12JUN2003		NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. BOSSI 12JUN2003	MTA 100 CONNECTOR ASSEMBLY, 22 AWG, STANDARD		
0 PLC ±		PRODUCT SPEC	SIZE	CAGE CODE	DRAWING NO
1 PLC ±		108-1050	A2	00779	C=644540
2 PLC ±		APPLICATION SPEC	RESTRICTED TO		
3 PLC ± 0.13 [.005]		114-1019	SCALE 5:1 SHEET 1 OF 1 REV E1		
4 PLC ±		WEIGHT			
ANGLES ±		CUSTOMER DRAWING			
FINISH					

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-644540-3](#)