



Part Number:

254-DS308-RO

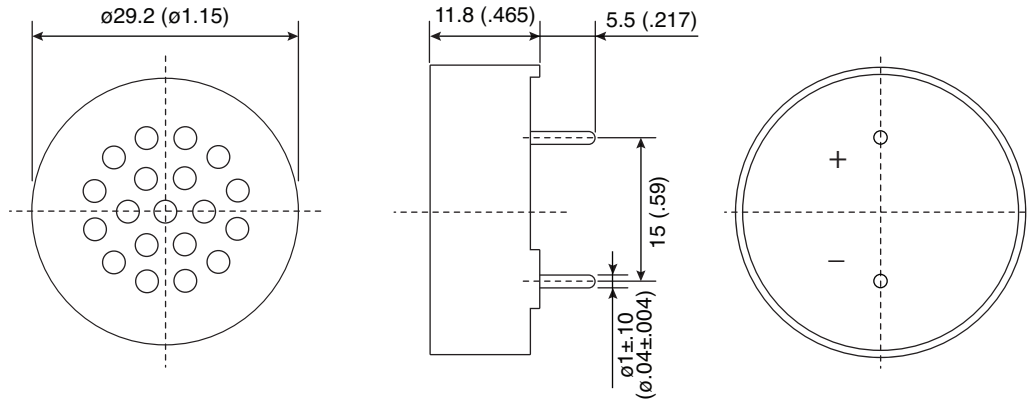

Dynamic Speaker

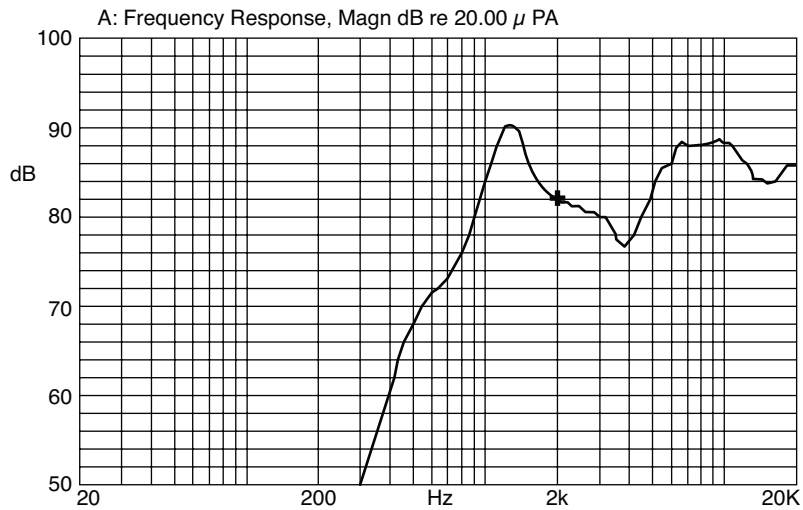

KT-400360

Electrical Specifications:

- Rated Input Power: 0.15 W
- Max Input Power: 0.2W for 1 min.
- Impedance: $8\Omega \pm 15\%$ at 2KHZ 1V
- Resonant Frequency (Fo): 1300Hz $\pm 20\%$ at Fo, 1V
- Frequency Range: Fo - 5KHz

Materials:

- Magnet: NdFeB

Soldering Specifications:

- Recommend using constant searing-iron in temperature range $360 \pm 5^\circ\text{C}$. Soldering time 2 seconds.

Note:

- RoHS Compliant

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Kobitone:](#)

[254-DS308-RO](#)