

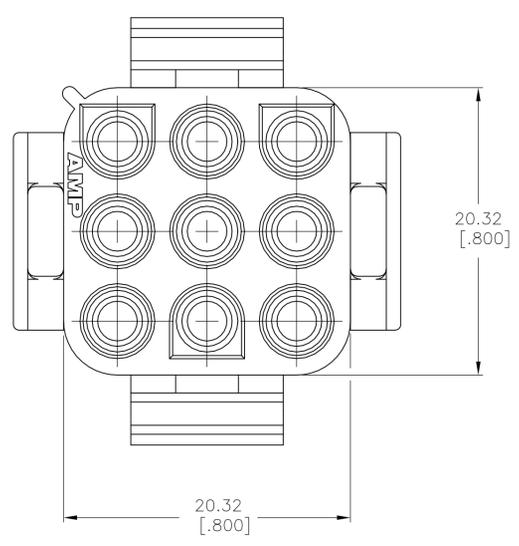
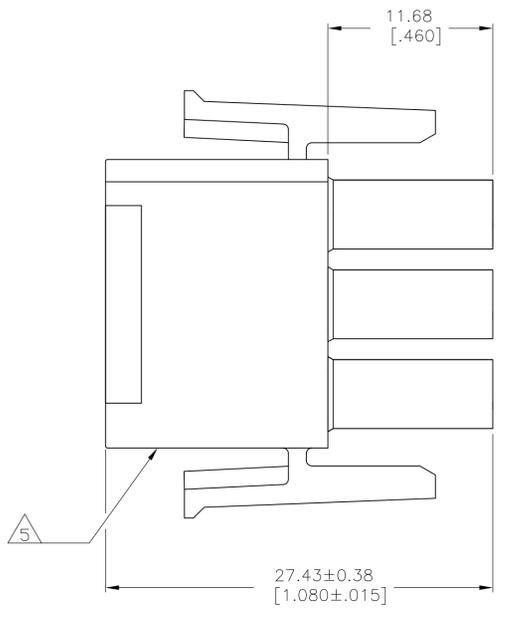



LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
CM	00	AL1	REVISED PER ECR-17-008392	26JUN2017	BW	KR	

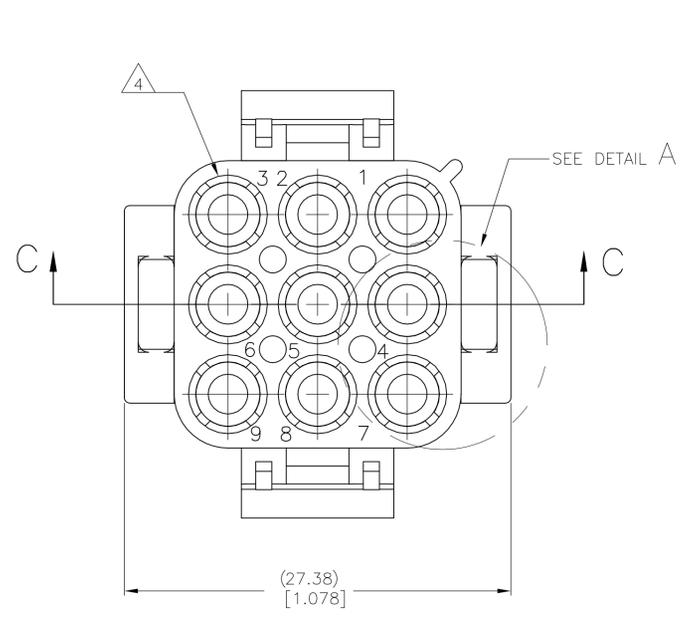



- MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ CAP OR HEADER.
 - SMALL NICKS ARE PERMITTED ON THE CIRCUIT TOWERS WHICH COULD INCREASE THE INITIAL HOUSING MATING FORCE BY UP TO 4.4 NEWTONS [1.0 LBS]. NO INDIVIDUAL NICKED TOWER SHALL INCREASE THIS FORCE BY OVER 2.2 NEWTONS [.5 LBS].
 - DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED, CONDITION. ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.
- △ 4 FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OR SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OPTIONAL.
- △ 5 UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.
- △ 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

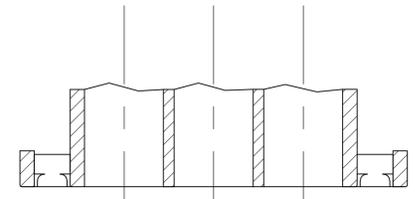


PARTIAL SECTION C-C

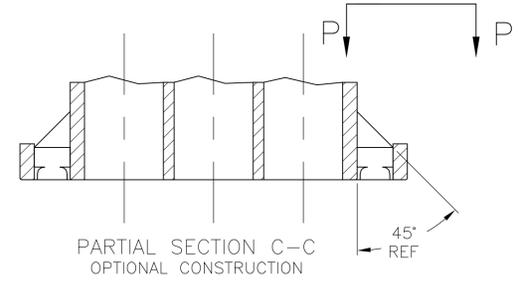

PARTIAL SECTION C-C
OPTIONAL CONSTRUCTION

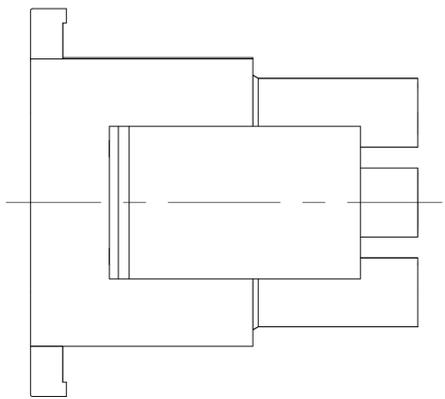

PARTIAL DETAIL A △ 4
OPTIONAL CONSTRUCTIONS

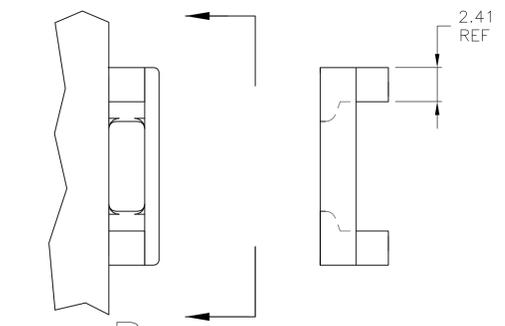


VIEW P
OPTIONAL CONSTRUCTIONS





△ 6 SUPERCEDED BY	△ 6 OBSOLETE	△ 6 OBSOLETE	△ 6 OBSOLETE
1-480706-0	BLACK	1-480706-9	
	GRAY	1-480706-8	
	BLUE	1-480706-6	
	GREEN	1-480706-5	
	YELLOW	1-480706-4	
	ORANGE	1-480706-3	
	RED	1-480706-2	
	BROWN	1-480706-1	
	NATURAL	1-480706-0	
	COLOR	PART NO.	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	K. WHITAKER	01SEP04	STE TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK	S. RIDGILL	01SEP04	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	S. RIDGILL	01SEP04	PLUG, 9 CIRCUIT, UNIVERSAL MATE-N-LOK™	
0. PLC	± -	PRODUCT SPEC		SIZE		
1. PLC	± -	APPLICATION SPEC		CAGE CODE	DRAWING NO	RESTRICTED TO
2. PLC	± 0.13 [.005]	MATERIAL		A1	00779	480706
3. PLC	± -	FINISH		CUSTOMER DRAWING		
4. PLC	± -	MATERIAL		SCALE 4:1 SHEET 1 OF 2 REV AL1		
ANGLES	± 0.30°	MATERIAL		WEIGHT		

LOC		DIST		REVISIONS				
P	LTR	DESCRIPTION	DATE	DN	APVD			
CM	00	SEE SHEET 1						

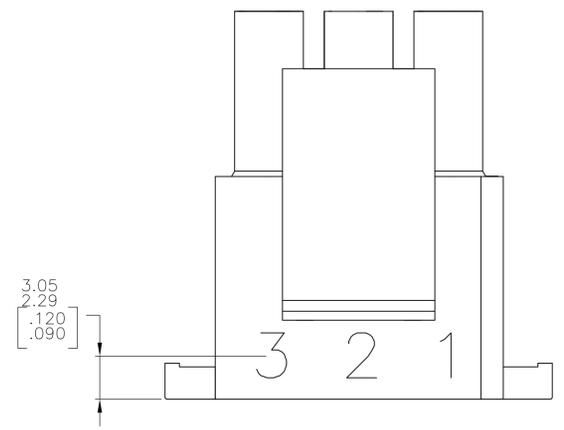

1. STAMP NUMBERS 3.18 [.125] HIGH AT WIRE END OF HOUSING (12 POINT DAVID TYPE).
2. CHARACTERS TO BE POSITIONED ON HOUSING TO BE READ FROM WIRE END ONLY.
3. VIOLET, BLACK, BROWN, AND BLUE COLORED BLOCKS TO BE STAMPED WITH WHITE CHARACTERS. ALL OTHER COLORED BLOCKS TO BE STAMPED WITH BLACK CHARACTERS.

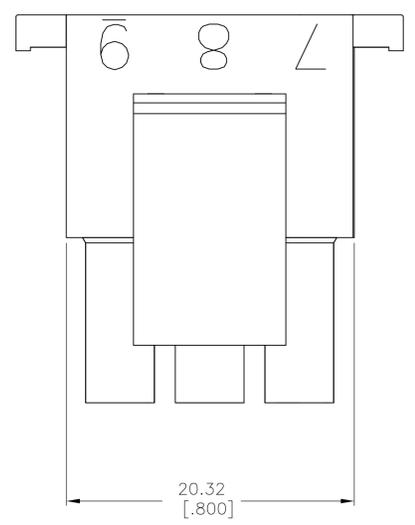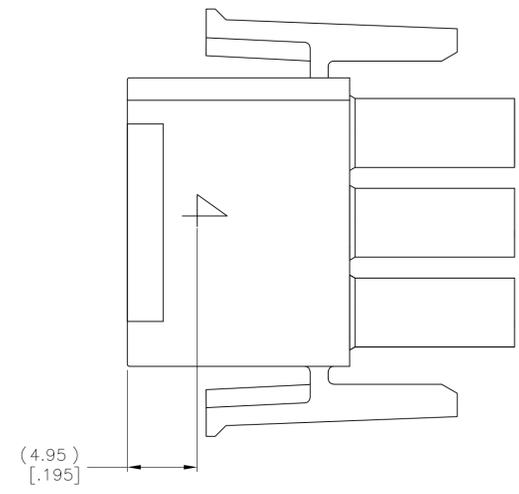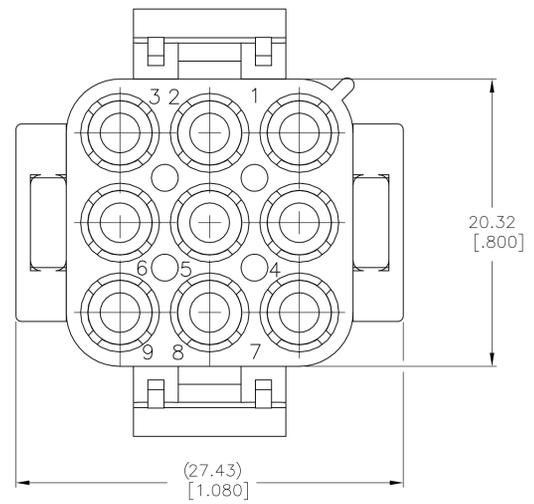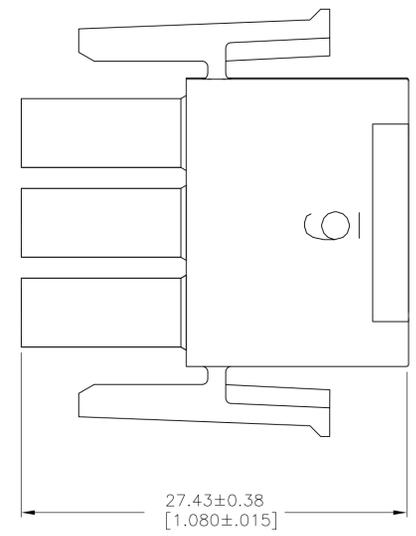

NATURAL	2-480706-0
COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN K. WHITAKER 01SEP2004	NAME	
DIMENSIONS: mm [INCHES]		CHK S. RIDGILL 01SEP2004	PLUG, 9 CIRCUIT, UNIVERSAL MATE-N-LOK	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S. RIDGILL 01SEP2004	SIZE	CAGE CODE
0 PLC	± -	PRODUCT SPEC	A1	00779
1 PLC	± -	APPLICATION SPEC	C=	480706
2 PLC	± 0.13 [.005]	WEIGHT	SCALE	4:1
3 PLC	± -	RESTRICTED TO	SHEET	2 OF 2
4 PLC	± -	CUSTOMER DRAWING	REV	AL1
ANGLES	± 0°30'			
MATERIAL	FINISH			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-480706-9](#)