


THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.

| REVISION | | | |
|----------|------------------------|----------|----------|
| REV. | DESCRIPTION | DATE | APPROVED |
| B | RoHS Compliancy | 06-01-06 | DP |
| C | Updated Specifications | 01-24-08 | DP |
| D | Graphics Update | 03-14-08 | DP |


MECHANICAL DIMENSIONS:

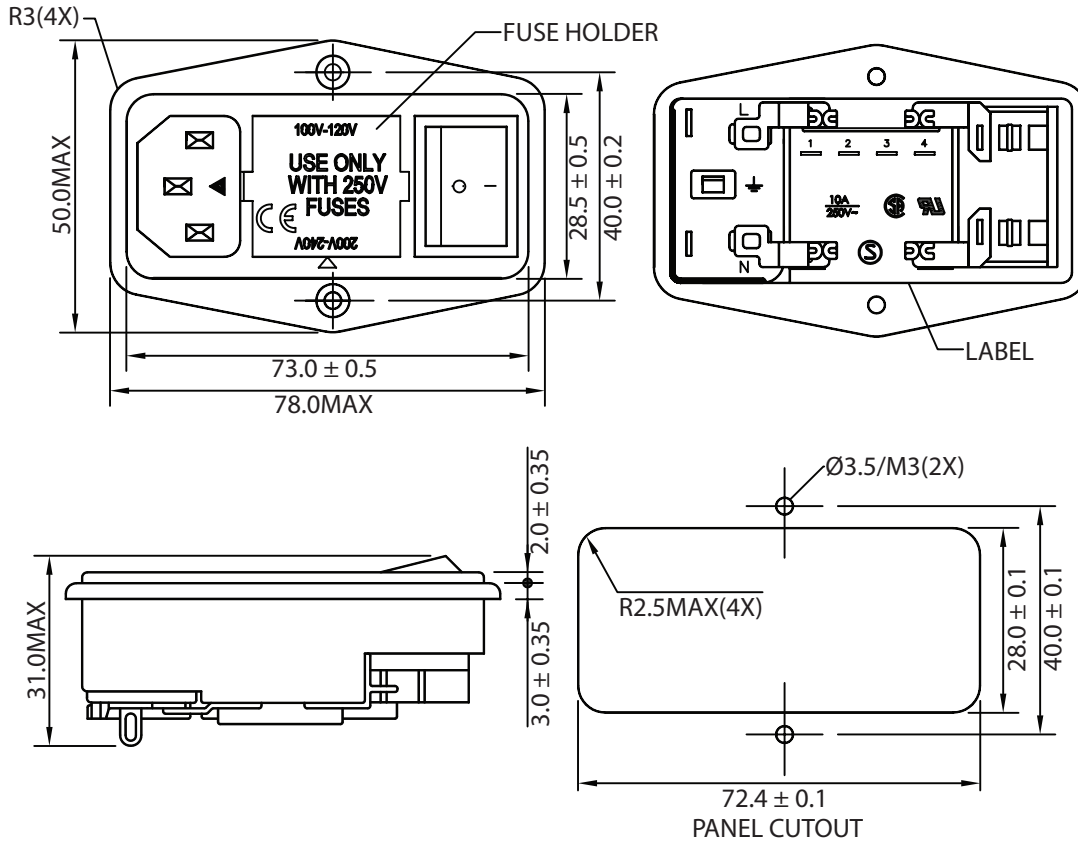

ELECTRICAL CHARACTERISTICS:

- 1-1. VOLTAGE RATING.....250VAC
- 1-2. CURRENT RATING
A. @ 250 VAC (UL,CSA, SEMKO).....10 A RMS MAX
- 1-3. HIPOT RATING (FOR ONE MINUTE)
A. LINE TO GROUND 2000V AC
B. LINE TO LINE2000V AC
- 1-4. MINIMUM INSULATION RESISTANCE: @ 500V DC
A. LINE & NEUTRAL TO GROUND 100M OHM
B. LINE TO NEUTRAL 100M OHM
- 1-5. AMBIENT TEMPERAUTRE 25° C
- 1-6. OPERATING TEMPERATURE..... -25° C TO +85° C
- 1-7. DOUBLE 5X20mm FUSEHOLDER, PLASTIC CASE
- 1-8. SOLDER TAB TERMINALS
- 1-9. FLAMMABILITY CLASS UL94V-0
- 1-10. APPROVALS: UL, CSA, SEMKO
- 1-11. RoHS COMPLIANT

ELECTRICAL SCHEMATIC:

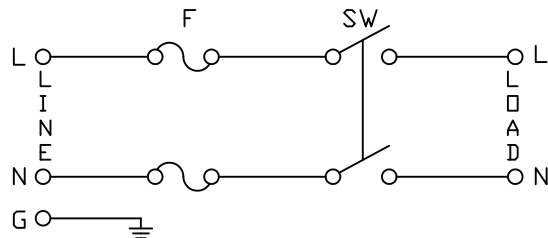

CONTROLLED

| Dim range (mm) | Tolerance +/- (mm) | Qualtek Electronics Corp. PPC DIVISION | | |
|----------------|--------------------|---|----------------|-----------------|
| | | Part Number: 764-00/002 | RoHS Compliant | |
| 0-1 | 0.15 | Description: MULTI-FUNCTION MODULE | | |
| 1-6 | 0.20 | | | |
| 6-18 | 0.30 | UNIT: in | REV. D | |
| 18-50 | 0.50 | | | |
| 50-120 | 0.70 | Drawn / Date | Checked / Date | Approved / Date |
| 120-250 | 0.90 | B.Zhang 09-24-03 | 09-24-03 | JJH / 09-24-03 |
| 250-500 | 1.20 | | | |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Qualtek:](#)

[764-00/002](#)