

## VZH Series

### Features

- $4\phi \sim 18\phi$ ,  $105^{\circ}\text{C}$ , 2,000 ~ 5,000 hours assured
- Large capacitance with ultra low impedance capacitors
- Designed for surface mounting on high density PC board
- RoHS Compliance



Marking color: Black

### Specifications

Items	Performance																														
Category Temperature Range	$-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$																														
Capacitance Tolerance	$\pm 20\%$ (at 120Hz, $20^{\circ}\text{C}$ )																														
Leakage Current (at $20^{\circ}\text{C}$ )	$I = 0.01CV$ or $3\ (\mu\text{A})$ whichever is greater (after 2 minutes) Where, C = rated capacitance in $\mu\text{F}$ , V = rated DC working voltage in V																														
Tan $\delta$ (at 120Hz, $20^{\circ}\text{C}$ )	<table border="1"> <tr> <td>Rated Voltage</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>80</td> <td>100</td> </tr> <tr> <td>Tan<math>\delta</math> (max)</td> <td>0.30</td> <td>0.26</td> <td>0.22</td> <td>0.16</td> <td>0.13</td> <td>0.10</td> <td>0.08</td> <td>0.08</td> <td>0.07</td> </tr> </table> <p>When the capacitance exceeds 1,000<math>\mu\text{F}</math>, 0.02 shall be added every 1,000<math>\mu\text{F}</math> increase.</p>	Rated Voltage	6.3	10	16	25	35	50	63	80	100	Tan $\delta$ (max)	0.30	0.26	0.22	0.16	0.13	0.10	0.08	0.08	0.07										
Rated Voltage	6.3	10	16	25	35	50	63	80	100																						
Tan $\delta$ (max)	0.30	0.26	0.22	0.16	0.13	0.10	0.08	0.08	0.07																						
Low Temperature Characteristics (at 120Hz)	<p>Impedance ratio shall not exceed the values given in the table below.</p> <table border="1"> <tr> <td>Rated Voltage</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>80</td> <td>100</td> </tr> <tr> <td>Impedance Ratio</td> <td><math>Z(-25^{\circ}\text{C})/Z(+20^{\circ}\text{C})</math></td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td></td> <td><math>Z(-55^{\circ}\text{C})/Z(+20^{\circ}\text{C})</math></td> <td>8</td> <td>5</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> </table>	Rated Voltage	6.3	10	16	25	35	50	63	80	100	Impedance Ratio	$Z(-25^{\circ}\text{C})/Z(+20^{\circ}\text{C})$	4	3	2	2	2	2	2	2		$Z(-55^{\circ}\text{C})/Z(+20^{\circ}\text{C})$	8	5	4	3	3	3	3	3
Rated Voltage	6.3	10	16	25	35	50	63	80	100																						
Impedance Ratio	$Z(-25^{\circ}\text{C})/Z(+20^{\circ}\text{C})$	4	3	2	2	2	2	2	2																						
	$Z(-55^{\circ}\text{C})/Z(+20^{\circ}\text{C})$	8	5	4	3	3	3	3	3																						
Endurance	<table border="1"> <tr> <td>Test Time</td> <td>2,000 Hrs for <math>\phi D \leq 6.3\text{mm}</math> &amp; <math>8 \times 6.5\text{L}</math> &amp; <math>10 \phi \times 7.7\text{L}</math>; 5,000 Hrs for <math>\phi D \geq 8\text{mm}</math></td> </tr> <tr> <td>Capacitance Change</td> <td>Within <math>\pm 30\%</math> of initial value</td> </tr> <tr> <td>Tan<math>\delta</math></td> <td>Less than 300% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </table> <p>* The above specifications shall be satisfied when the capacitors are restored to <math>20^{\circ}\text{C}</math> after the rated voltage applied for 2,000 ~ 5,000 hours at <math>105^{\circ}\text{C}</math>.</p>	Test Time	2,000 Hrs for $\phi D \leq 6.3\text{mm}$ & $8 \times 6.5\text{L}$ & $10 \phi \times 7.7\text{L}$ ; 5,000 Hrs for $\phi D \geq 8\text{mm}$	Capacitance Change	Within $\pm 30\%$ of initial value	Tan $\delta$	Less than 300% of specified value	Leakage Current	Within specified value																						
Test Time	2,000 Hrs for $\phi D \leq 6.3\text{mm}$ & $8 \times 6.5\text{L}$ & $10 \phi \times 7.7\text{L}$ ; 5,000 Hrs for $\phi D \geq 8\text{mm}$																														
Capacitance Change	Within $\pm 30\%$ of initial value																														
Tan $\delta$	Less than 300% of specified value																														
Leakage Current	Within specified value																														
Shelf Life Test	<table border="1"> <tr> <td>Test Time</td> <td>1,000 Hrs</td> </tr> <tr> <td>Capacitance Change</td> <td>Within <math>\pm 30\%</math> of initial value</td> </tr> <tr> <td>Tan<math>\delta</math></td> <td>Less than 300% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </table> <p>* The above specifications shall be satisfied when the capacitors are restored to <math>20^{\circ}\text{C}</math> after exposing them for 1,000 hours at <math>105^{\circ}\text{C}</math> without voltage applied.</p>	Test Time	1,000 Hrs	Capacitance Change	Within $\pm 30\%$ of initial value	Tan $\delta$	Less than 300% of specified value	Leakage Current	Within specified value																						
Test Time	1,000 Hrs																														
Capacitance Change	Within $\pm 30\%$ of initial value																														
Tan $\delta$	Less than 300% of specified value																														
Leakage Current	Within specified value																														
Ripple Current and Frequency Multipliers	<table border="1"> <tr> <td>Frequency(Hz)</td> <td>50, 60</td> <td>120</td> <td>1k</td> <td>10k up</td> </tr> <tr> <td>Multiplier</td> <td>0.60</td> <td>0.70</td> <td>0.85</td> <td>1.0</td> </tr> </table>	Frequency(Hz)	50, 60	120	1k	10k up	Multiplier	0.60	0.70	0.85	1.0																				
Frequency(Hz)	50, 60	120	1k	10k up																											
Multiplier	0.60	0.70	0.85	1.0																											

### Diagram of Dimensions

Fig. 1


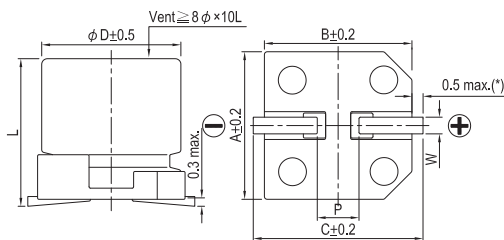


Fig. 2

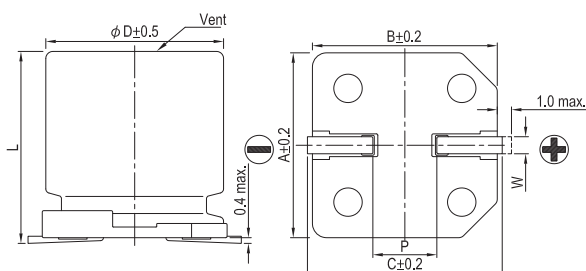

### Lead Spacing and Diameter


Unit: mm

$\phi D$	L	A	B	C	W	$P \pm 0.2$	Fig. No.
4	$5.7 \pm 0.3$	4.3	4.3	5.1	0.5 ~ 0.8	1.0	1
5	$5.7 \pm 0.3$	5.3	5.3	5.9	0.5 ~ 0.8	1.5	1
6.3	$5.7 \pm 0.3$	6.6	6.6	7.2	0.5 ~ 0.8	2.0	1
6.3	$7.7 \pm 0.3$	6.6	6.6	7.2	0.5 ~ 0.8	2.0	1
8	$6.5 \pm 0.3$	8.3	8.3	9.0	0.5 ~ 0.8	2.3	1
8	$10 \pm 0.5$	8.3	8.3	9.0	0.7 ~ 1.1	3.1	1
10	$7.7 \pm 0.3$	10.3	10.3	11.0	0.7 ~ 1.3	4.7	1
10	$10 \pm 0.5$	10.3	10.3	11.0	0.7 ~ 1.3	4.7	1
12.5	$13.5 \pm 0.5$	13.0	13.0	13.7	1.1 ~ 1.4	4.4	2
12.5	$16 \pm 0.5$	13.0	13.0	13.7	1.1 ~ 1.4	4.4	2
16	$16.5 \pm 0.5$	17.0	17.0	18.0	1.1 ~ 1.4	6.4	2
16	$21.5 \pm 0.5$	17.0	17.0	18.0	1.1 ~ 1.4	6.4	2
18	$16.5 \pm 0.5$	19.0	19.0	20.0	1.1 ~ 1.4	6.4	2
18	$21.5 \pm 0.5$	19.0	19.0	20.0	1.1 ~ 1.4	6.4	2


(\*): For  $4 \sim 6.3\phi$  is 0.4 max.

## Marking


$\phi D \leq 6.3\text{mm}$



$\phi D = 8 \sim 10\text{mm}$



$\phi D \geq 12.5\text{mm}$

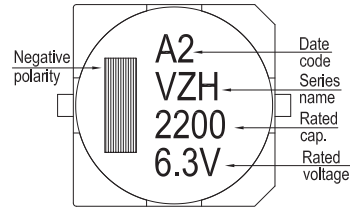

Dimension:  $\phi D \times L(\text{mm})$

Ripple Current: mA/rms at 100k Hz, 105°C

Impedance:  $\Omega$ / at 100k Hz, 20°C

## Dimension and Permissible Ripple Current

$\mu\text{F}$	V. DC Contents	6.3V (0J)			10V (1A)			16V (1C)			25V (1E)			35V (1V)			50V (1H)			
		$\phi D \times L$	Imp.	mA	$\phi D \times L$	Imp.	mA	$\phi D \times L$	Imp.	mA	$\phi D \times L$	Imp.	mA	$\phi D \times L$	Imp.	mA	$\phi D \times L$	Imp.	mA	
1	010																4×5.7	2.9	60	
2.2	2R2																4×5.7	2.9	60	
3.3	3R3																4×5.7	2.9	60	
4.7	4R7																4×5.7	1.35	80	
10	100							4×5.7	1.35	80	4×5.7	1.35	80	5×5.7	0.80	150	6.3×5.7	0.88	165	
22	220	4×5.7	1.35	80	4×5.7	1.35	80	5×5.7	0.80	150	5×5.7	0.80	150	6.3×5.7	0.44	230	6.3×5.7	0.88	165	
33	330	4×5.7	1.35	80	5×5.7	0.80	150	6.3×5.7	0.44	230	6.3×5.7	0.44	230	6.3×5.7	0.44	230	6.3×7.7	0.68	185	
47	470	5×5.7	0.80	150	6.3×5.7	0.44	230	6.3×5.7	0.44	230	6.3×5.7	0.44	230	6.3×5.7	0.44	230	6.3×7.7 8×6.5	0.68 0.68	185 185	
68	680																8×6.5	0.36	280	
100	101	6.3×5.7	0.44	230	6.3×5.7	0.44	230	6.3×5.7	0.44	230	6.3×7.7 8×6.5	0.36 0.36	280 280	8×10	0.17	450	8×10 10×10	0.34 0.18	369 553	
150	151	6.3×5.7	0.44	230	6.3×5.7	0.44	230	6.3×7.7 8×6.5	0.36 0.36	280 280	8×10	0.17	450	8×10 10×7.7	0.17 0.17	450 450	10×10	0.18	553	
220	221	6.3×7.7	0.36	280	6.3×7.7 8×6.5	0.36 0.36	280 280	6.3×7.7	0.36	280	8×10 10×7.7	0.17 0.17	450 450	10×10	0.09	670	12.5×13.5	0.12	650	
330	331	8×6.5 8×10	0.36 0.17	280 450	8×10 10×7.7	0.17 0.17	450 450	8×10 10×7.7	0.17 0.17	450 450	8×10	0.17	450	10×10 12.5×13.5	0.090 0.070	670 820	12.5×13.5	0.12	650	
470	471	8×10 10×7.7	0.17 0.17	450 450	8×10 10×7.7	0.17 0.17	450 450	8×10 10×10	0.17 0.09	450 670	10×10	0.09	670	12.5×16	0.060	950	16×16.5	0.073	1,000	
680	681	8×10 10×7.7	0.17 0.17	450 450	10×10	0.09	670	10×10	0.09	670	12.5×13.5	0.070	820	12.5×16	0.060	950	16×16.5	0.073	1,000	
1,000	102	8×10	0.17	450	10×10	0.09	670	12.5×13.5	0.070	820	12.5×16	0.060	950	16×16.5	0.054	1,260	18×16.5	0.066	1,500	
1,500	152	10×10	0.09	670	12.5×13.5	0.070	820	12.5×16	0.060	950	16×16.5	0.054	1,260	18×16.5 16×21.5	0.048 0.038	1,500 1,630	18×21.5	0.05	1,620	
2,200	222	12.5×13.5	0.070	820	12.5×16	0.060	950	16×16.5	0.054	1,260	16×16.5	0.054	1,260	18×21.5	0.038	1,750				
3,300	332	12.5×16	0.060	950	16×16.5	0.054	1,260	16×16.5 16×21.5	0.054 0.038	1,260 1,630	18×16.5 16×21.5 18×21.5	0.048 0.038 0.038	1,500 1,630 1,750							
4,700	472	16×16.5	0.054	1,260	16×16.5	0.054	1,260	18×16.5 16×21.5	0.048 0.038	1,500 1,630										
6,800	682	18×16.5 16×21.5	0.048 0.038	1,500 1,630	18×16.5 16×21.5	0.048 0.038	1,500 1,630													
8,200	822	18×16.5 16×21.5	0.048 0.038	1,500 1,630	18×21.5	0.038	1,750													

SMD



Dimension:  $\phi D \times L$ (mm)  
 Ripple Current: mA/rms at 100k Hz, 105°C  
 Impedance:  $\Omega$ / at 100k Hz, 20°C

### Dimension and Permissible Ripple Current

V. DC		63V (1J)			80V (1K)			100V (2A)		
$\mu F$	Contents	$\phi D \times L$	Imp.	mA	$\phi D \times L$	Imp.	mA	$\phi D \times L$	Imp.	mA
4.7	4R7	5×5.7	1.90	70						
10	100	6.3×5.7	1.20	130						
22	220	6.3×7.7	0.90	150	8×10	1.3	130	8×10	1.3	130
33	330	8×10	0.50	280	8×10	1.3	130	10×10	0.7	200
47	470	8×10	0.50	280	10×10	0.7	200	10×10	0.7	200
100	101	10×10	0.25	450	10×10	0.7	200	12.5×13.5	0.32	450
150	151	12.5×13.5	0.15	700	12.5×13.5	0.32	450	12.5×16	0.26	550
220	221	12.5×13.5	0.15	700	12.5×16	0.26	550	16×16.5 18×21.5	0.17 0.15	650 950
330	331	16×16.5	0.082	900	16×16.5	0.17	650	18×16.5 16×21.5	0.15 0.15	850 900
470	471	16×16.5	0.082	900	16×21.5	0.15	900	18×21.5	0.15	950
680	681	18×16.5 16×21.5	0.080 0.080	1,150 1,150	18×21.5	0.15	950			
1,000	102	18×21.5	0.06	1,250						

### Part Numbering System

VZH Series	470 $\mu F$	$\pm 20\%$	6.3V	Carrier Tape	8 $\phi$ × 10L	Pb-free and PET coating case
<b>VZH</b>	<b>471</b>	<b>M</b>	<b>0J</b>	<b>TR</b>	<b>-</b>	<b>0810</b>
Series Name	Capacitance	Capacitance Tolerance	Rated Voltage	Package Type	Terminal Type	Case size
						Lead Wire and Coating Type

Note: For more details, please refer to "Part Numbering System (SMD Type)" on page 15.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Lelon:

[VZH-100M1CTR-0406](#) [VZH-100M1ETR-0406](#) [VZH-100M1JTR-0606](#) [VZH-100M1VTR-0506](#) [VZH-101M0JTR-0606](#)  
[VZH-101M1ATR-0606](#) [VZH-101M1CTR-0606](#) [VZH-220M1ETR-0506](#) [VZH-220M1HTR-0606](#) [VZH-4R7M1VTR-0406](#)  
[VZH-470M1ETR-0606](#) [VZH-470M1HTR-0607](#) [VZH-470M1JTR-0810](#) [VZH-470M1VTR-0606](#) [VZH-470M2ATR-1010](#)  
[VZH-101M1ETR-0607](#) [VZH-101M1HTR-0810](#) [VZH-101M1JTR-1010](#) [VZH-101M1VTR-0810](#) [VZH-102M1ATR-1010](#)  
[VZH-221M1CTR-0607](#) [VZH-221M1ETR-0810](#) [VZH-221M1HTR-1010](#) [VZH-221M1JTR-1313](#) [VZH-331M1ETR-0810](#)  
[VZH-331M1HTR-1313](#) [VZH-471M0JTR-0810](#) [VZH-471M1ATR-0810](#) [VZH-471M1CTR-0810](#) [VZH-471M1ETR-1010](#)  
[VZH-471M1JTR-1616](#) [VZH-681M1ATR-1010](#) [VZH-010M1HTR-0406](#) [VZH-100M1HTR-0606](#) [VZH-101M1HTR-1010](#)  
[VZH-101M1KTR-1010](#) [VZH-101M1KTR-1313](#) [VZH-101M2ATR-1313](#) [VZH-102M0JTR-0810](#) [VZH-102M1CTR-1313](#)  
[VZH-102M1ETR-1316](#) [VZH-102M1VTR-1616](#) [VZH-151M0JTR-0606](#) [VZH-151M1ATR-0606](#) [VZH-151M1CTR-0607](#)  
[VZH-151M1ETR-0810](#) [VZH-151M1HTR-1010](#) [VZH-151M1JTR-1313](#) [VZH-151M1KTR-1313](#) [VZH-151M1VTR-0810](#)  
[VZH-151M2ATR-1316](#) [VZH-151M2ATR-1616](#) [VZH-152M0JTR-1010](#) [VZH-152M1ATR-1313](#) [VZH-152M1CTR-1316](#)  
[VZH-152M1ETR-1616](#) [VZH-220M0JTR-0406](#) [VZH-220M1ATR-0406](#) [VZH-220M1CTR-0506](#) [VZH-220M1JTR-0607](#)  
[VZH-220M1VTR-0606](#) [VZH-221M0JTR-0607](#) [VZH-221M1VTR-1010](#) [VZH-222M0JTR-1313](#) [VZH-222M1ATR-1316](#)  
[VZH-222M1CTR-1616](#) [VZH-222M1ETR-1616](#) [VZH-2R2M1HTR-0406](#) [VZH-330M0JTR-0406](#) [VZH-330M1ATR-0506](#)  
[VZH-330M1CTR-0606](#) [VZH-330M1ETR-0606](#) [VZH-330M1HTR-0607](#) [VZH-330M1JTR-0810](#) [VZH-330M1VTR-0606](#)  
[VZH-331M0JTR-0810](#) [VZH-331M1ATR-0810](#) [VZH-331M1CTR-0810](#) [VZH-331M1JTR-1616](#) [VZH-331M1KTR-1616](#)  
[VZH-331M1VTR-1313](#) [VZH-332M0JTR-1316](#) [VZH-332M1ATR-1616](#) [VZH-332M1CTR-1616](#) [VZH-3R3M1HTR-0406](#)  
[VZH-470M0JTR-0506](#) [VZH-470M1ATR-0606](#) [VZH-470M1CTR-0606](#) [VZH-470M1KTR-1010](#) [VZH-471M1CTR-1010](#)  
[VZH-471M1HTR-1616](#) [VZH-471M1VTR-1316](#) [VZH-472M0JTR-1616](#) [VZH-472M1ATR-1616](#) [VZH-4R7M1HTR-0506](#)  
[VZH-4R7M1JTR-0506](#) [VZH-680M1HTR-0810](#) [VZH-681M0JTR-0810](#) [VZH-681M1CTR-1010](#) [VZH-681M1ETR-1313](#)