

THIS DRAWING IS UNPUBLISHED.


RELEASED FOR PUBLICATION

REVISIONS

© COPYRIGHT - By -

ALL RIGHTS RESERVED.

P	LTR	DESCRIPTION	DATE	DWN	APVD
	R	REVISED PER ECO-16-001693	29AUG2016	AP	DG

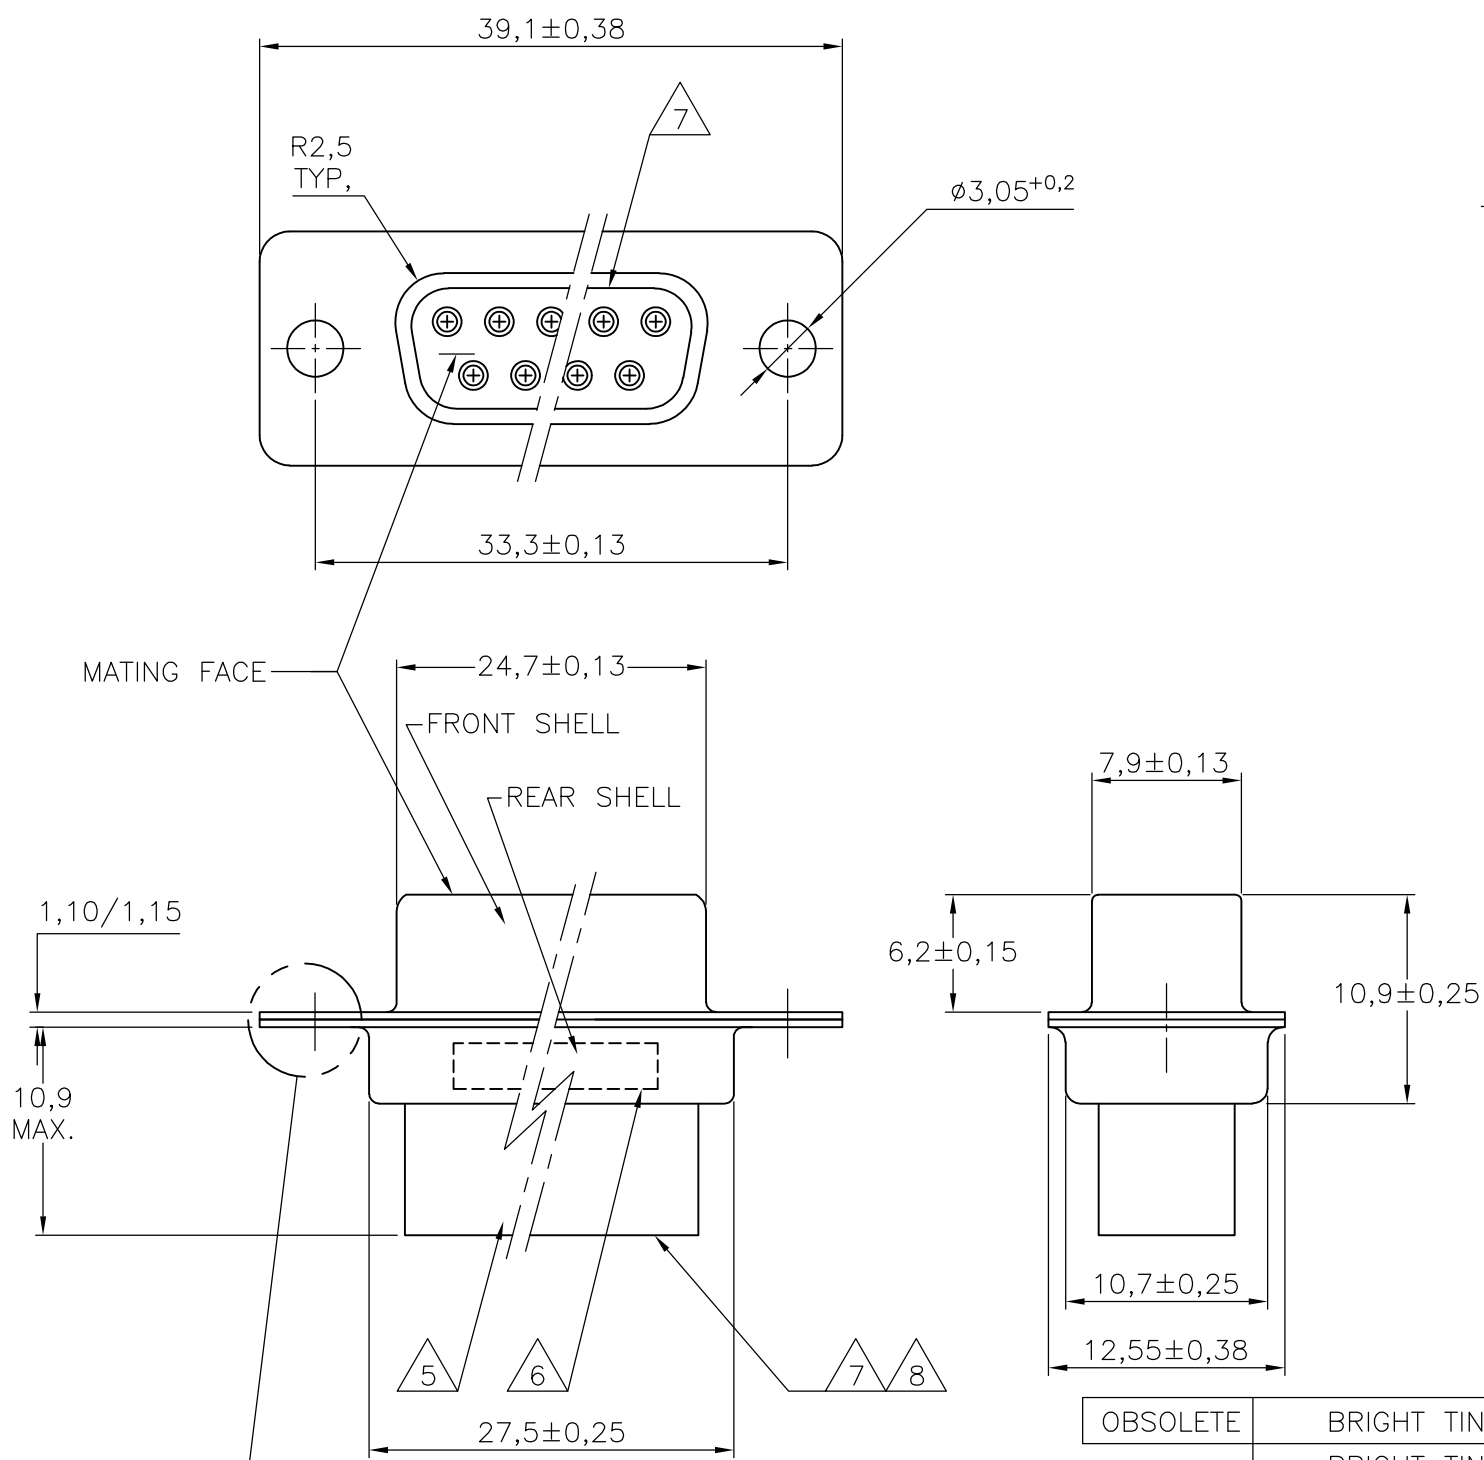

NOTES:

- THIS RECEPTACLE ACCEPTS SIZE 20 REC. CONTACTS.
- MAXIMUM WIRE INSULATION RECOMMENDED FOR USE WITH THIS RECEPTACLE IS 1,73 DIA. MAX..
- RETENTION TINES ARE AN INTEGRAL PART OF INSERT.
- FOLLOWING INSERTION/REMOVAL TOOLS ARE RECOMMENDED FOR USE WITH THESE CONNECTORS:
 32-28AWG/28-24AWG CONTACTS
 91067-3 INSERTION/REMOVAL
 726363-1 INSERTION ONLY
 24-20AWG CONTACTS
 726363-1 INSERTION ONLY
 726364-1 REMOVAL ONLY

OBSOLETE	BRIGHT TIN	BRIGHT TIN	STEEL	164532-9	8
	BRIGHT TIN	BRIGHT TIN	STEEL	164532-4	
	PLATING FRONT SHELL	PLATING REAR SHELL	MATERIAL SHELLS	PARTNUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D.KESSLER	11FEB99	TE Connectivity 15 POS HDP-20 RECEPTACLE CONNECTOR SIZE 2		
DIMENSIONS: mm		CHK W.SOOMERS	APVD W.SOOMERS			NAME
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC				APPLICATION SPEC
MATERIAL		WEIGHT 0.000000				RESTRICTED TO
FINISH		CUSTOMER DRAWING		SCALE NTS	SHEET 1 OF 1	
0 PLC ± -		A3		REV R		
1 PLC ± 0,2		C-164532				
2 PLC ± -						
3 PLC ± -						
4 PLC ± -						
ANGLES ± 2°						

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[164532-4](#)