

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** **0878311411**  
**Status:** **Active**  
**Overview:** Milli-Grid Connector System  
**Description:** 2.00mm Pitch Milli-Grid Header, Vertical, Through Hole, Shrouded, 14 Circuits, 0.76µm Gold (Au) Plating, with Center Polarization Slot and Locking Windows, Tube

**Documents:**

[3D Model](#) [Packaging Specification PK-87831-001-001 \(PDF\)](#)  
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)  
[Product Specification PS-87831-027-001 \(PDF\)](#)

**Agency Certification**


UL E29179

**General**

Product Family PCB Headers  
Series [87831](#)  
Application Signal, Wire-to-Board  
Comments Contact Molex for application in automotive industry  
Overview [Milli-Grid Connector System](#)  
Product Name Milli-Grid  
UPC 884982417656

**Physical**

Breakaway No  
Circuits (Loaded) 14  
Circuits (maximum) 14  
Color - Resin Black  
Durability (mating cycles max) 100  
First Mate / Last Break No  
Glow-Wire Capable No  
Guide to Mating Part No  
Keying to Mating Part None  
Lock to Mating Part Yes  
Material - Metal Phosphor Bronze  
Material - Plating Mating Gold  
Material - Plating Termination Tin  
Material - Resin Nylon  
Net Weight 0.751/g  
Number of Rows 2  
Orientation Vertical  
PC Tail Length 3.50mm  
PCB Locator No  
PCB Retention None  
PCB Thickness - Recommended 1.60mm  
Packaging Type Tube  
Pitch - Mating Interface 2.00mm  
Pitch - Termination Interface 2.00mm  
Plating min - Mating 0.762µm  
Plating min - Termination 1.905µm  
Polarized to PCB No  
Shrouded Yes  
Stackable No  
Surface Mount Compatible (SMC) Yes  
Temperature Range - Operating -55°C to +105°C  
Termination Interface: Style Through Hole

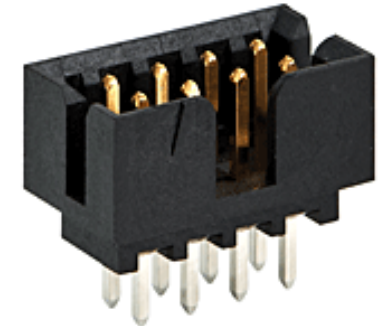

Series image - Reference only

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per  
-ED/01/2018 (15  
January 2018)

**Halogen-Free**

**Status**

**Not Low-Halogen**

**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS

ELV

RoHS Phthalates

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[87831](#) Series

**Mates With**

Milli-Grid Vertical Through Hole Receptacle [79107](#) , [78787](#) , Milli-Grid Flex-to-Board Vertical Receptacle [79108](#) , Milli-Grid Vertical Surface Mount Receptacle [79109](#) , [78788](#) , Milli-Grid Crimp Housing [51110](#) , Milli-Grid Cable-to-Board Receptacle [87568](#)

**Electrical**

|                               |      |
|-------------------------------|------|
| Current - Maximum per Contact | 2.0A |
| Voltage - Maximum             | 125V |

**Solder Process Data**

|  |      |
|--|------|
| Duration at Max. Process Temperature (seconds) | 010  |
| Lead-free Process Capability                   | WAVE |
| Max. Cycles at Max. Process Temperature        | 001  |
| Process Temperature max. C                     | 260  |

**Material Info****Reference - Drawing Numbers**

|                         |                   |
|-------------------------|-------------------|
| Packaging Specification | PK-87831-001-001  |
| Product Specification   | PS-87831-027-001  |
| Sales Drawing           | SD-87831-0001-001 |

This document was generated on 03/01/2018

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[87831-1411](#)