

Features

Unregulated Converters

- Ultra-compact - only 8.3 x 8.3 x 6.8mm
- 1kVDC or 2kVDC Isolation
- No External Components Required
- Optional Continuous Short Circuit Protected
- Fully Encapsulated
- UL and EN Certified, CB Report
- Efficiency to 84%

Description

The RNM series DC/DC converters are ultra-compact isolated single output converters for applications where board space is at a premium. Despite their small size, the converters are fully featured with a full industrial operating temperature range of -40°C to +85°C without derating (+100°C with derating), 1kVDC or 2kVDC isolation and optional short circuit protection. The converters are also UL-60950 and EN-60950 certified and have a CB Report.

Selection Guide

Part Number	Input Voltage (2kV) (VDC)	Output Voltage (VDC)	Output Current (mA)	Efficiency (%)	Max. Capacitive Load ⁽¹⁾	
RNM-xx3.3S	(H)	3.3, 5, 12, 15	3.3	303	75	2200µF
RNM-xx05S	(H)	3.3, 5, 12, 15	5	200	70-78	1000µF
RNM-xx09S	(H)	3.3, 5, 12, 15	9	111	70-78	1000µF
RNM-xx12S	(H)	3.3, 5, 12, 15	12	83	76-78	470µF
RNM-xx15S	(H)	3.3, 5, 12, 15	15	66	78-84	470µF

x = Input Voltage (other input and output voltage combinations available on request)

* add Suffix "P" for Continuous Short Circuit Protection, e.g. RNM-0505S/P, RNM-0505S/HP

Specifications (measured at T_A = 25°C, nominal input voltage, full load and after warm-up)

Input Voltage Range		±10%
Output Voltage Accuracy		±5%
Line Voltage Regulation		1.2%/1% of Vin typ.
Load Voltage Regulation (10% to 100% full load)	3.3V output type	20% max.
	5V output type	15% max.
	9V, 12V and 15V output types	10% max.
Output Ripple and Noise (20MHz limited)		100mVp-p max.
Operating Frequency		50kHz min. / 100kHz typ. / 105kHz max.
Efficiency at Full Load		70% min.
Minimum Load = 0%		Specifications valid for 10% minimum load only.
Isolation Voltage	(tested for 1 second)	1000VDC
	(rated for 1 minute**)	500VAC / 60Hz
Isolation Voltage	H-Suffix (tested for 1 second)	2000VDC
Rated Working Voltage	H-Suffix (rated for 1 minute**)	1000VAC / 60Hz
Isolation Capacitance		20pF min. / 75pF max.
Isolation Resistance		10 GΩ min.
Short Circuit Protection		1 Second
P-Suffix		Continuous
Operating Temperature Range (free air convection)		-40°C to +85°C (see Graph)
Storage Temperature Range		-55°C to +125°C
Relative Humidity		95% RH
Package Weight		1.1g
Packing Quantity		60 pcs per Tube

continued on next page

ECONOLINE

DC/DC-Converter


with 3 year Warranty

RECOM

1 Watt

DIP6


Single Output



UL-60950-1 Certified
EN-60950-1 Certified

RNM

Derating-Graph (Ambient Temperature)

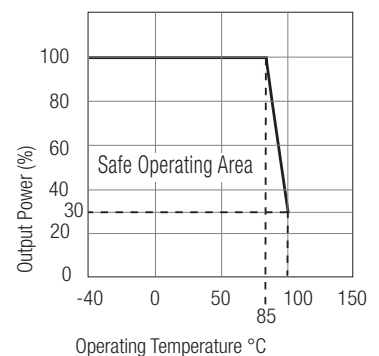

Refer to Application Notes

**Any data referred to in this datasheet are of indicative nature and based on our practical experience only. For further details, please refer to our Application Notes.

Specifications (cont.)

MTBF (+25°C)	} Detailed Information see Application Notes chapter "MTBF"	using MIL-HDBK 217F	977 x 10 ³ hours
(+85°C)		using MIL-HDBK 217F	189 x 10 ³ hours


Certifications

CB Test Report	Report: US/13859/UL	IEC 60950-1:2005 2nd Ed.
UL General Safety	Report: E358085	UL 60950-1 1st Ed.
EN General Safety	Report: SPCLVD1109103	EN60950-1:2006+A12:2011

Notes


Note 1 Maximum capacitive load is defined as the capacitive load that will allow start up in under 1 second without damage to the converter.

Tolerance Envelope

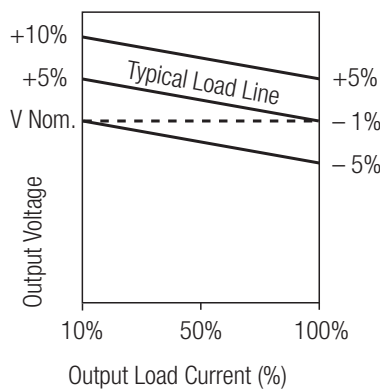


Typical Characteristics





RNM-xx05S

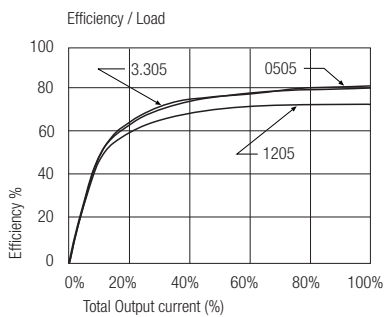

RNM-xx12S



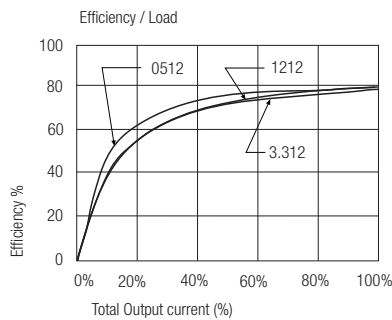


RNM-xx15S

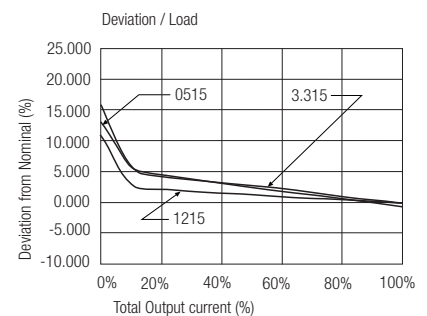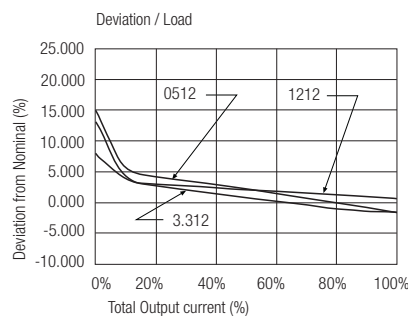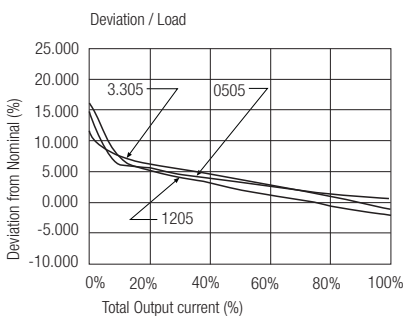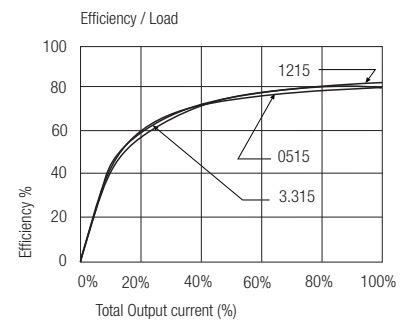

Package Style and Pinning (mm)


4 PIN DIP Package



RNM Pin Connections

Pin #	Single
1	-Vin
3	+Vin
4	+Vout
5	-Vout

XX.XX ± 0.25 mm

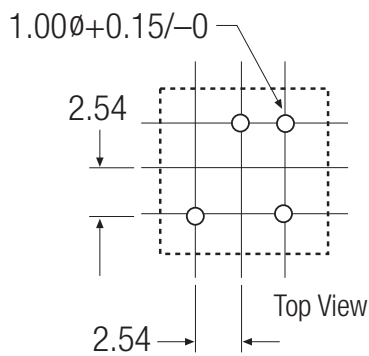

Recommended Footprint Details

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

RECOM:

[RNM-0505S/H](#) [RNM-0505S/HP](#) [RNM-0505S/P](#) [RNM-0509S](#) [RNM-0509S/H](#) [RNM-0509S/HP](#) [RNM-0512S/H](#) [RNM-0512S/HP](#) [RNM-0512S/P](#) [RNM-0515S](#) [RNM-0515S/H](#) [RNM-0515S/HP](#) [RNM-0515S/P](#) [RNM-053.3S/H](#) [RNM-053.3S/HP](#) [RNM-053.3S/P](#) [RNM-1205S/H](#) [RNM-1205S/HP](#) [RNM-1205S/P](#) [RNM-1209S](#) [RNM-1209S/H](#) [RNM-1209S/HP](#) [RNM-1209S/P](#) [RNM-1212S/H](#) [RNM-1212S/HP](#) [RNM-1212S/P](#) [RNM-1215S](#) [RNM-1215S/H](#) [RNM-1215S/HP](#) [RNM-1215S/P](#) [RNM-123.3S](#) [RNM-123.3S/H](#) [RNM-123.3S/HP](#) [RNM-123.3S/P](#) [RNM-1505S](#) [RNM-1505S/H](#) [RNM-1505S/HP](#) [RNM-1505S/P](#) [RNM-1509S](#) [RNM-1509S/H](#) [RNM-1509S/HP](#) [RNM-1509S/P](#) [RNM-1512S](#) [RNM-1512S/H](#) [RNM-1512S/HP](#) [RNM-1512S/P](#) [RNM-1515S](#) [RNM-1515S/H](#) [RNM-1515S/HP](#) [RNM-1515S/P](#) [RNM-153.3S](#) [RNM-153.3S/H](#) [RNM-153.3S/HP](#) [RNM-153.3S/P](#) [RNM-3.305S/H](#) [RNM-3.305S/HP](#) [RNM-3.305S/P](#) [RNM-3.309S](#) [RNM-3.309S/H](#) [RNM-3.309S/HP](#) [RNM-3.309S/P](#) [RNM-3.312S](#) [RNM-3.312S/H](#) [RNM-3.312S/HP](#) [RNM-3.312S/P](#) [RNM-3.315S](#) [RNM-3.315S/H](#) [RNM-3.315S/HP](#) [RNM-3.315S/P](#) [RNM-3.33.3S](#) [RNM-3.33.3S/H](#) [RNM-3.33.3S/HP](#) [RNM-3.33.3S/P](#) [RNM-0505S](#) [RNM-0512S](#) [RNM-053.3S](#) [RNM-1205S](#) [RNM-1212S](#) [RNM-3.305S](#) [RNM-0509S/P](#)