

UNCONTROLLED DOCUMENT


	PART NUI	MBER
SSL-	-LX25	783SRD

-	REV.	ı
	В	I

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
Α	E.C.N. #10BRDR. & REDRAWN.	8.5.99
В	E.C.N. #10702.	1.10.01



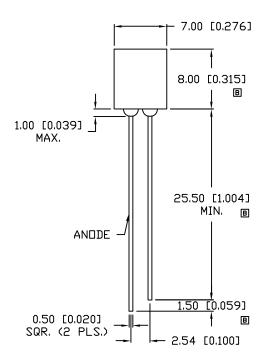



ELECTRO-OPTICAL (CHARACTERIS [*]	TICS TA=2	5 ° C	$I_f = 20 \text{mA}$	
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		660		nm	
FORWARD VOLTAGE		1.8	2.3	v_f	
REVERSE VOLTAGE	4.0			V_r	Ir=100µA
AXIAL INTENSITY		50		mcd	$I_f = 20 \text{mA}$
VIEWING ANGLE		110		2x theta	
EMITTED COLOR:	RED				
EPOXY LENS FINISH	: RED DIFF	USED			

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	30	mA
POWER DISSIPATION	100	mW
DERATE FROM 25°C	- 1.2	mW/°C
OPERATING, STORAGE TEMP.	- 40 TO +85	•C
SOLDERING TEMP.	+ 260	•C
2.0mm FROM BODY		3 SEC. MAX

LIMITS OF SAFE OPERATION AT 25°C PER DIF

* t<10µS

UNCONTROL_ED_DOCUMENT
*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= $^{+}$ DECIMAL PRECISION MAX.= $^{+}$ 0.00 MAX.= $^{$

REV. PART NUMBER SSL-LX25783SRD

> 2.3mm x 8mm RECTANGULAR LED, 660nm SUPER RED, RED DIFFUSED LENS.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC.. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



CT

290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com

TW WEB: www.lumex.com.tw CHECKED BY: APPROVED BY: DATE: 4.26.90 DRAWN BY:

PAGE: 1 OF 1 SCALE: N/A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSL-LX25783SRD