




D

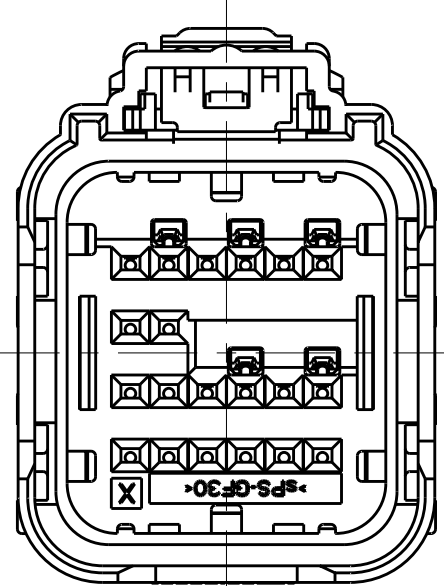


OPTION "B"

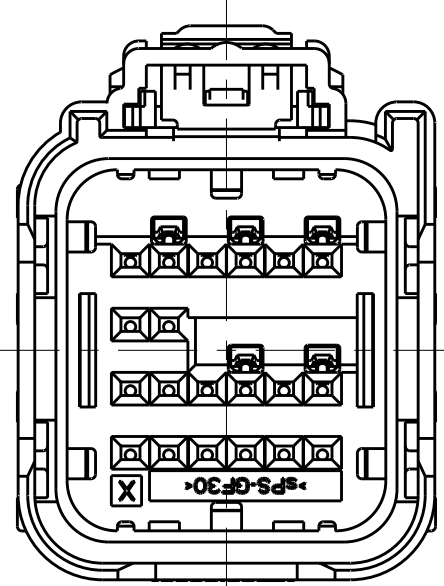


OPTION "D"

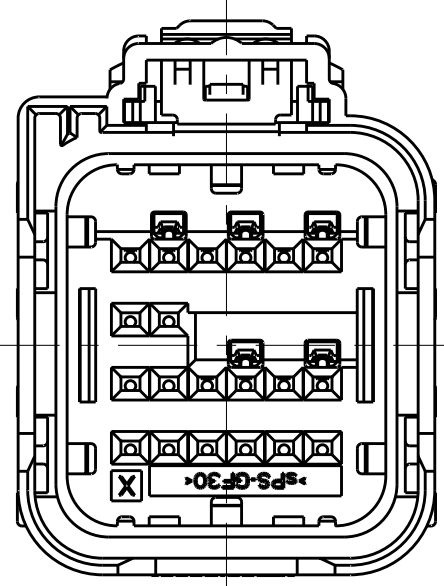


OPTION "F"

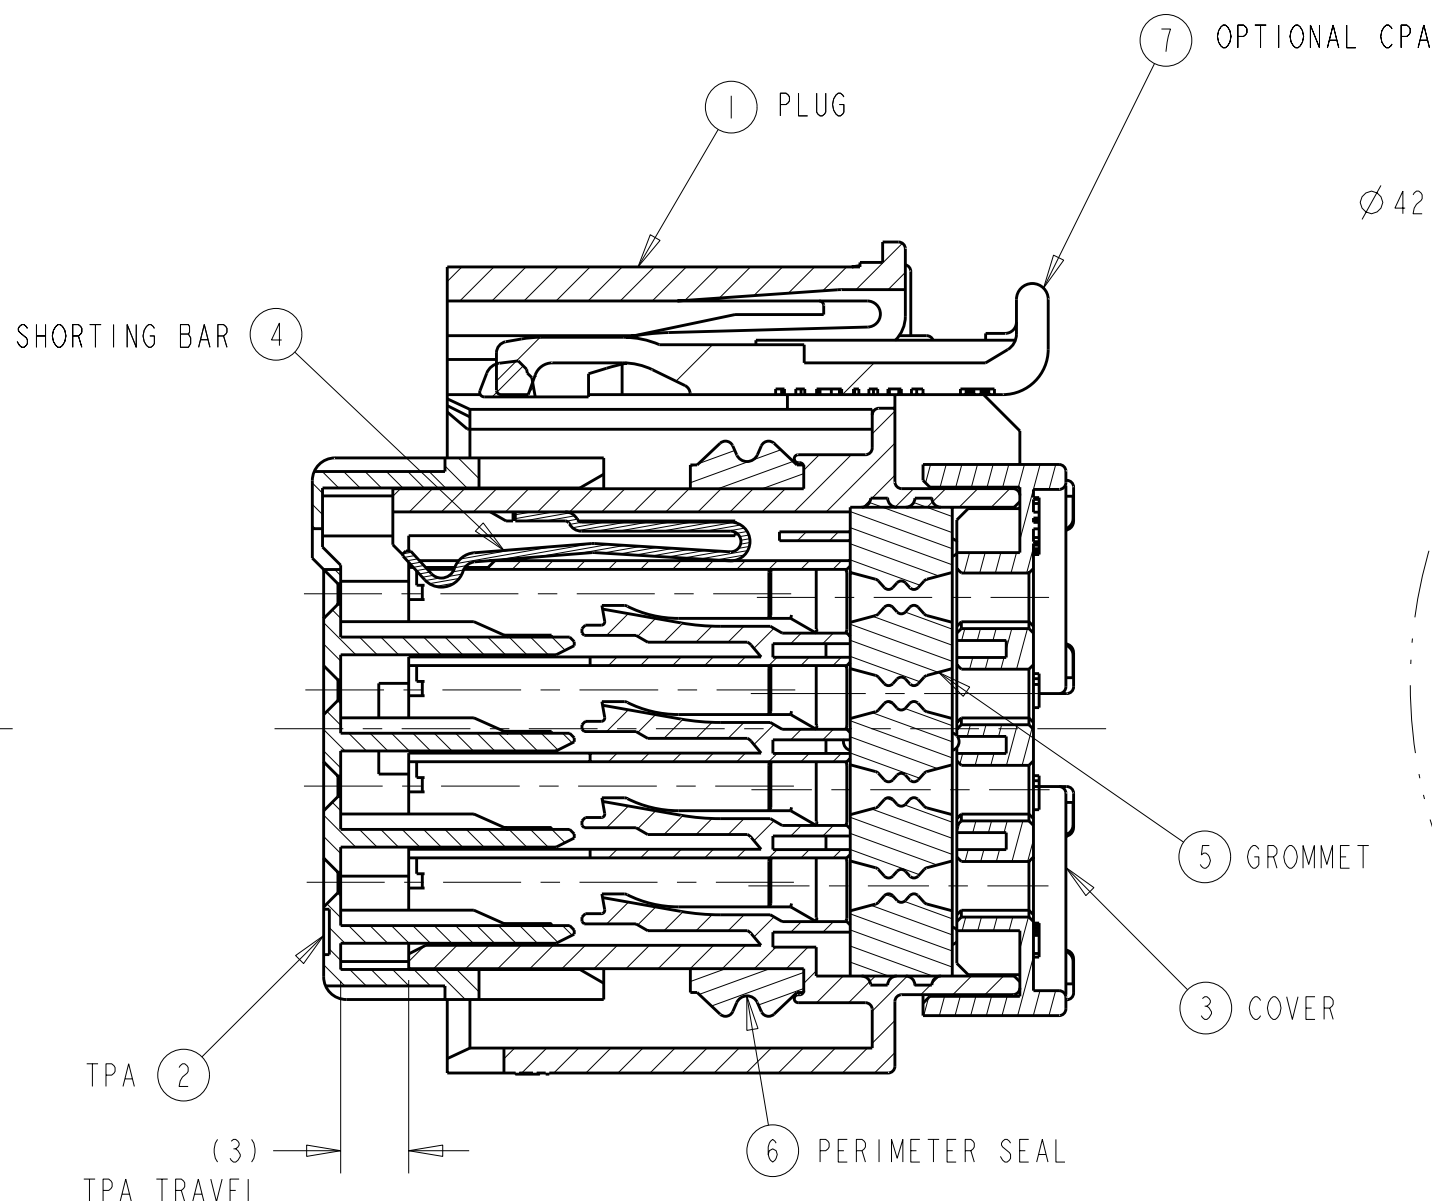



SECTION A-A
SHOWN WITH TPA IN
IT'S PRE-LOADED POSITION
(DELIVERY CONDNTION)

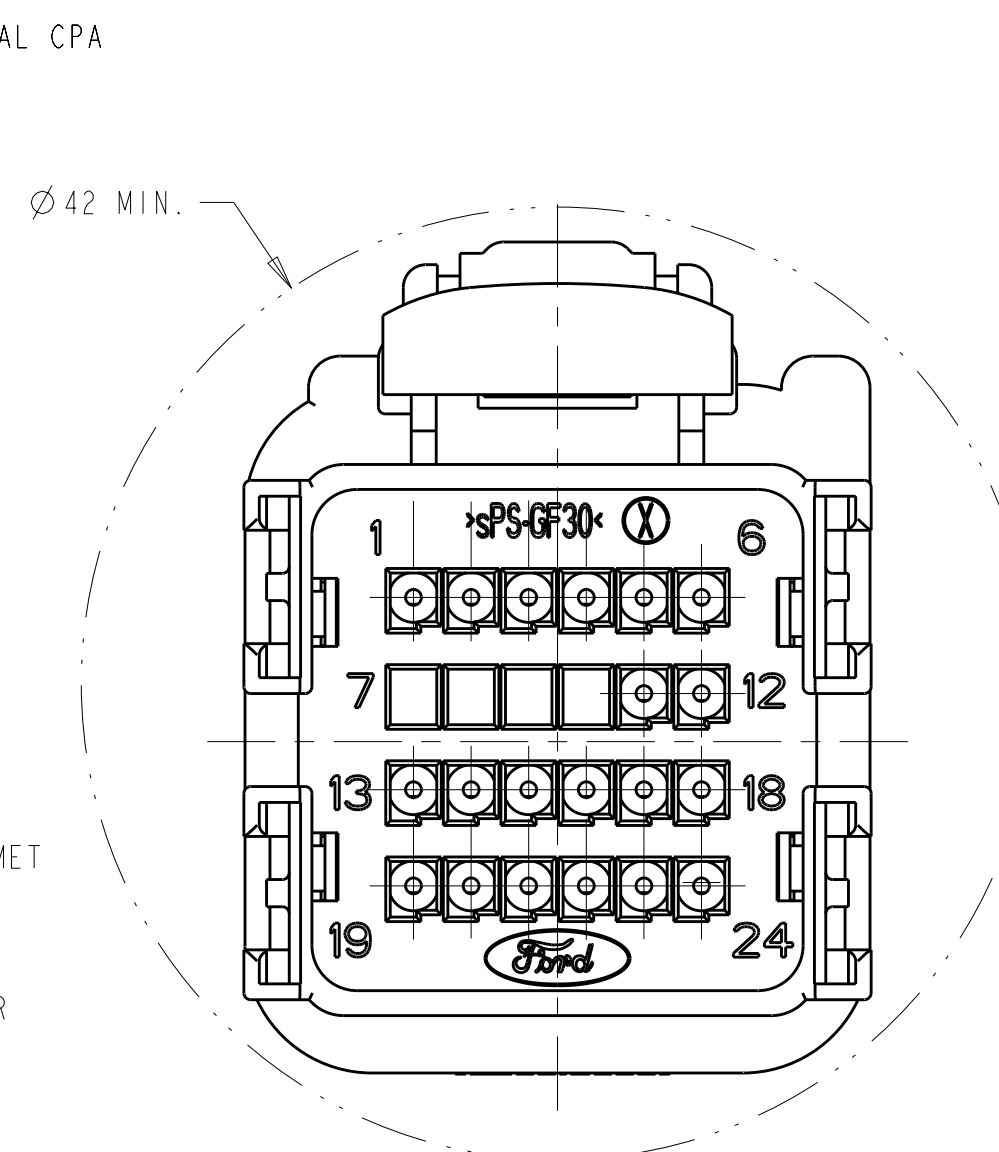


MINIMUM FEED THROUGH CONDITION
WITH 1mm CLEARANCE ALL AROUND

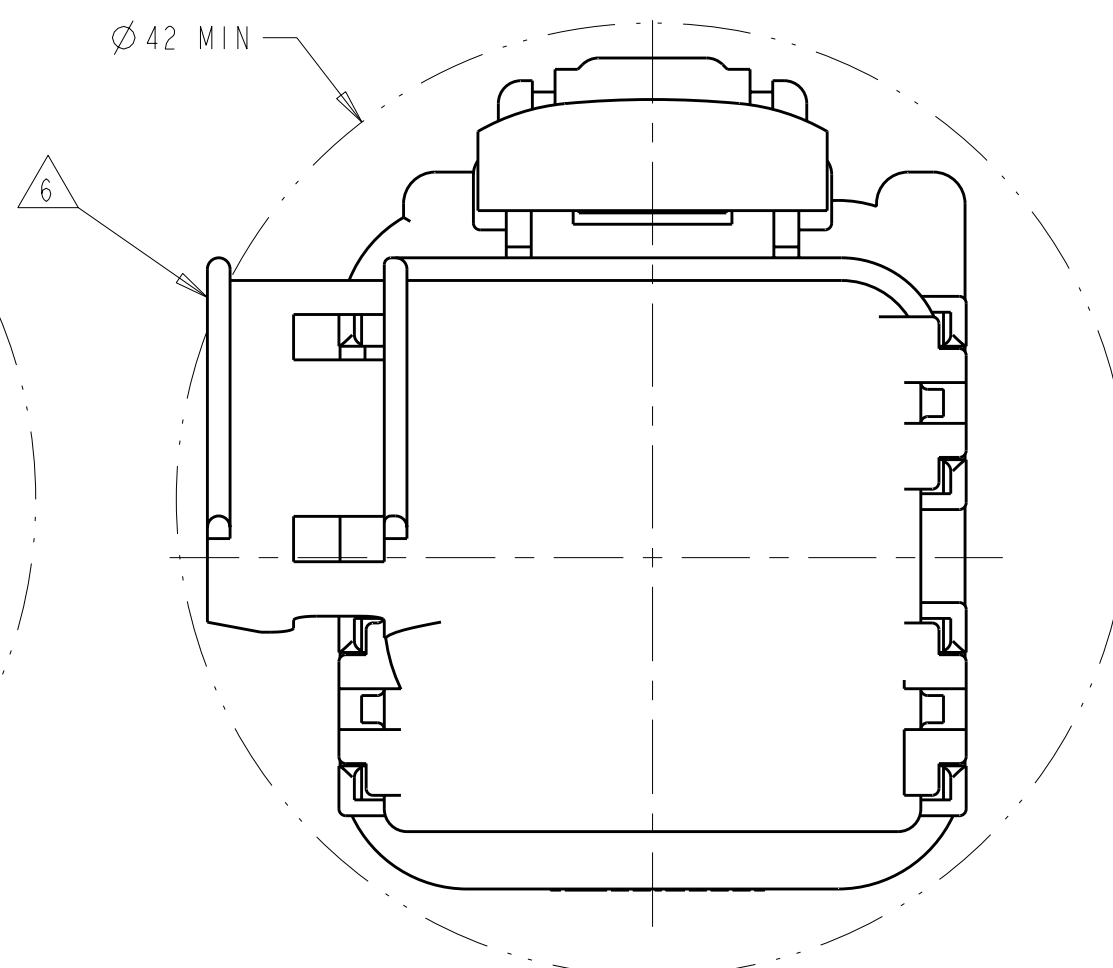


MINIMUM FEED THROUGH CONDITION
WITH 1mm CLEARANCE ALL AROUND
SHOWN WITH OPTION WIRESHIELD

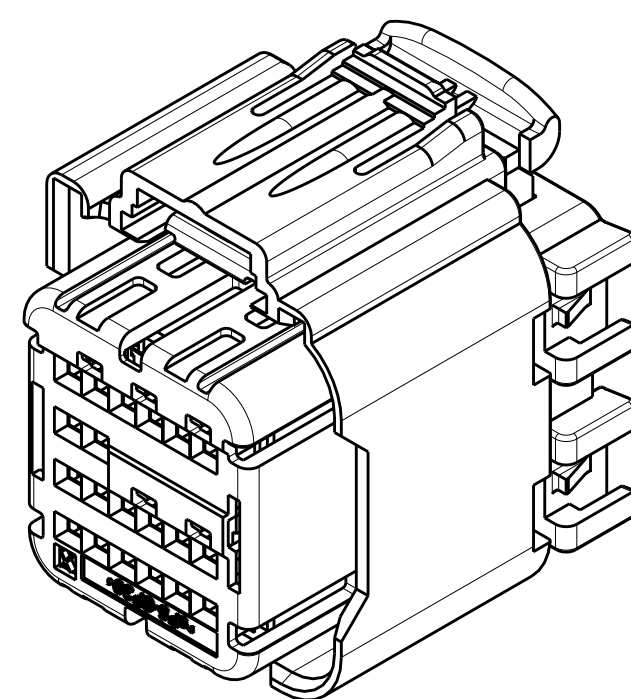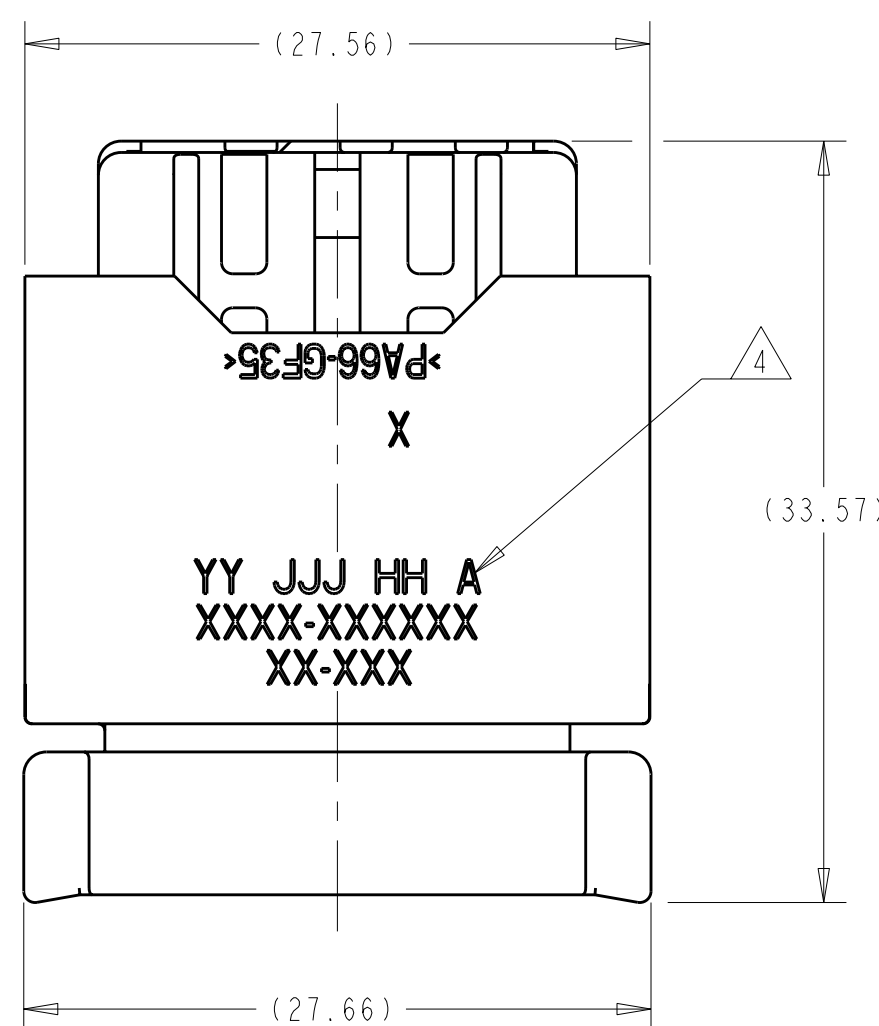

SCALE 2:1

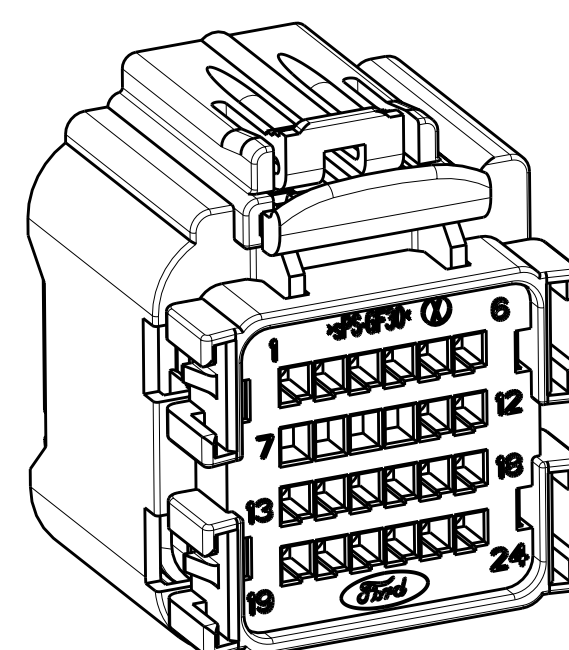

SCALE 2:1

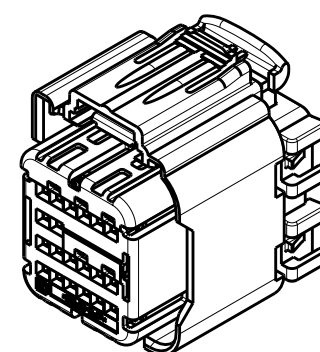

SCALE 1:1

KEYING OPTION "A" SHOWN

C

THIS DRAWING IS A COMPUTER GENERATED PART AND THE INFORMATION CONTAINED HEREIN IS THE PROPERTY OF TYCO ELECTRONICS. IT IS TO BE USED FOR THE PART IDENTIFICATION PURPOSES ONLY. IT IS NOT TO BE USED FOR ANY OTHER PURPOSES WITHOUT THE WRITTEN PERMISSION OF TYCO ELECTRONICS. IT IS THE USER'S RESPONSIBILITY TO OBTAIN THE LATEST REVISION.		OWN W. VESTAL 23JUL2007 CHK W. WELLINSKY 23JUL2007 APPR W. WELLINSKY 23JUL2007		 Tyco Electronics Harrisburg, PA 17105-3608	
DIMENSIONS:		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		NAME	
mm		0 PLC ± 1 PLC ±0.3 2 PLC ±0.10 3 PLC ± 4 PLC ± ANGLES ±°		24 WAY ARM PLUG ASSEMBLY WITH SHORTING BARS CUSTOMER SPEC.	
		PRODUCT SPEC - APPLICATION SPEC -		SIZE CAGE CODE DRAWING NO A 00779 C=1924670	
MATERIAL SEE CHART ABOVE		WEIGHT SEE NOTE 5 CUSTOMER DRAWING		RESTRICTED TO SCALE 3:1 SHEET 1 OF 3 REV D	

[illegible]AMP 4805 REV 31MAR2000

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[4-1924670-0](#)