

# SPECIFICATION CONTROL DRAWING

55A6455

TITLE WIRE, ELECTRIC, RADIATION-CROSSLINKED, EXTRUDED, MODIFIED, FLUOROPOLYMER-INSULATED, TIN-COATED COPPER, NORMAL WEIGHT


Date 8-29-95

Revision B

This specification sheet forms a part of the latest issue of Raychem Specification 55A.

CONDUCTOR - TIN-COATED COPPER

NOTE: Controlled Free Tin-Coating  
Thickness - 40 micro inches (minimum)

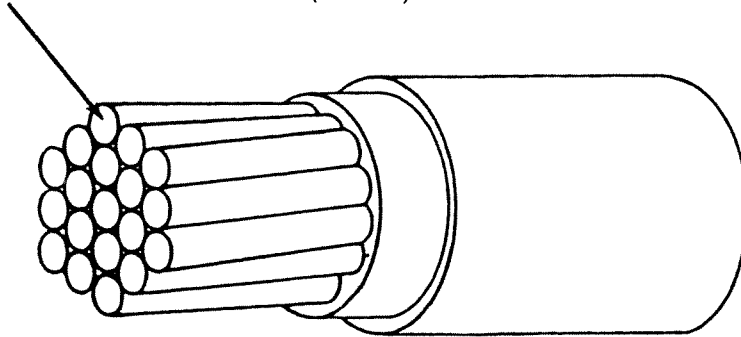

## ADDITIONAL REQUIREMENTS

SOLDERABILITY: 95% (minimum) coverage per MIL-STD-202F, Method 202E.

Except as specified above, this construction shall meet all the requirements of Raychem Specification Sheet 55A0811 for AWG sizes 24 through 10.

COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681.

DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL.

**Raychem**

Raychem Corporation  
300 Constitution Drive, Menlo Park, California 94025  
1-800-2 Raychem FAX: 1-415-361-6297

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[22759/34-20-9CS2621](#)