
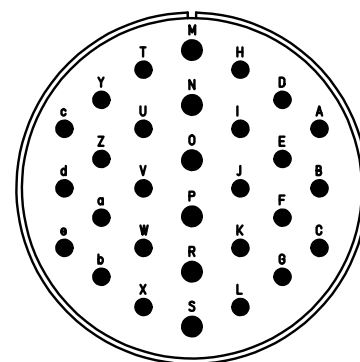
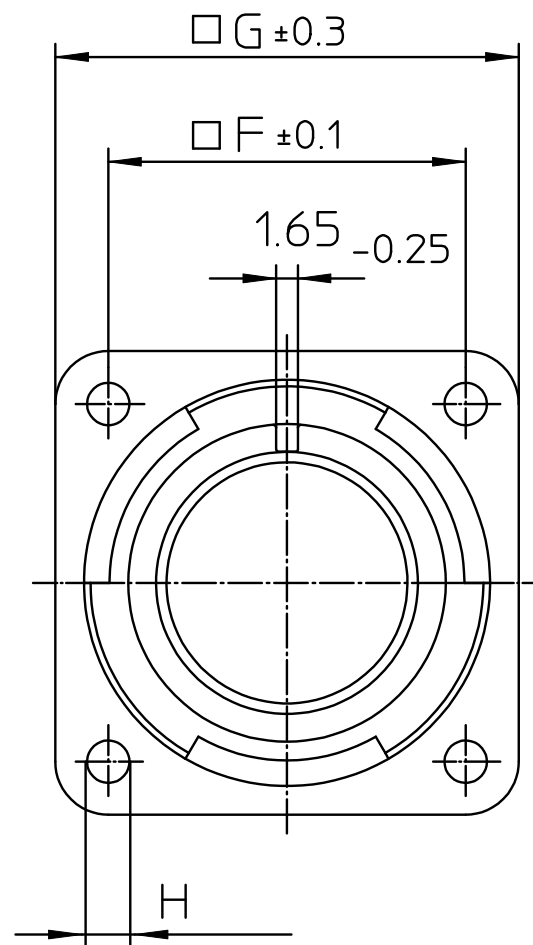


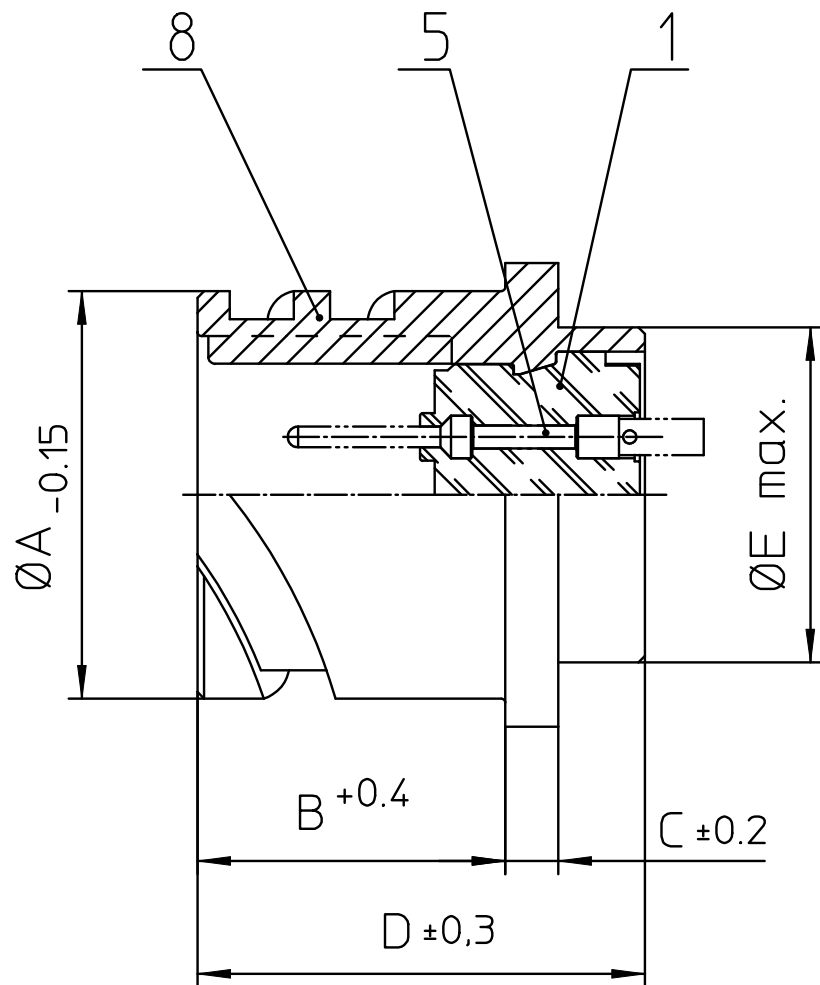

| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A   | 53.4              |
| B   | 22.2              |
| C   | 4                 |
| D   | 33.8              |
| E   | 47.8              |
| F   | 44.5              |
| G   | 57                |
| H   | 4.3               |

| NO. | BESCHREIBUNG / DESCRIPTION          |
|-----|-------------------------------------|
| 1   | ISOLIERKÖRPER STIFT / INSULATOR PIN |
| 5   | KONTAKTSTIFT / CONTACT PIN          |
| 8   | DOSENGEHÄUSE / SHELL                |

Note: Due to an automatic nomenclature system, numbers generated may not be sequential.

Specification and Dimensions subject to change  
Drawings illustrate normal insulator positioning

|                                                              |
|--------------------------------------------------------------|
| <b>Material Specification:</b>                               |
| Shell Material: Aluminium alloy                              |
| Shell Plating: Olive drab chromate over cadmium (conductive) |
| Insulator Material: CR-Elastomere                            |
| Contact Material: Copper alloy                               |
| Contact Plating: Gold 0,5 µm                                 |

all dimensions are in mm  
Dimensions without tolerance indications are general tolerances in acc. with DIN7168m

drawing for  
CUSTOMER



Engineered for life  
ITT CANNON GmbH  
D - 71384 Weinstadt/Germany

description CA3102E32-8P-B-F80-A176  
Box mounting receptacle

AWG Crimp / Pin / Layout: 32-8

© All rights reserved. Reproduction or issue to third in any form  
whatever is only permitted with written authorization of ITT Cannon



page  
1/1

revision  
1719 29. Apr 19