









1

2

3

4

5

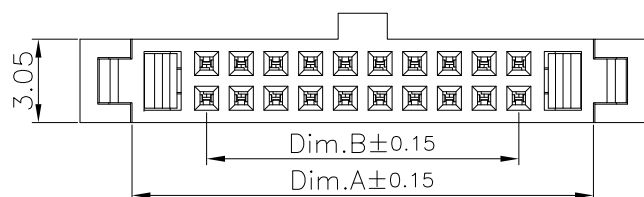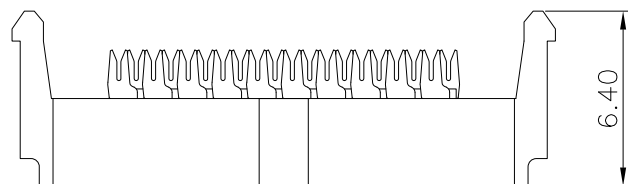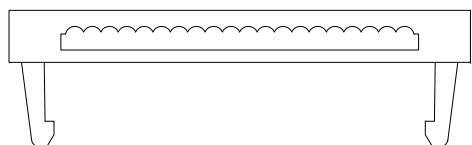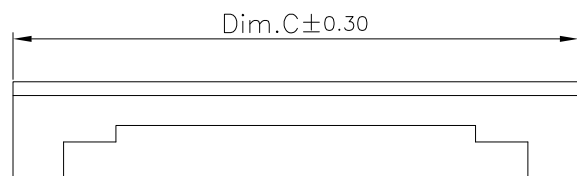

Specifications:

Current Rating: 1A AC,DC

Voltage Rating: 250V AC,DC

Contact Resistance: 20m ohm.Max

Insulation Resistance: 100M ohm.Min

Withstanding Voltage: 500V AC/Minute

Operating Temperature Range: -40°C ~ +105°C

Material:

Insulator: PBT(UL94V-0)

Insulator Color: Black

Contact: Phosphor Bronze

Finish: Gold Plated Over Nickel

Dimension Information:

Pin	Dim.A	Dim.B	Dim.C	Pin	Dim.A	Dim.B	Dim.C
6	8.00	2.54	11.80	28	21.97	16.51	25.77
8	9.27	3.81	13.07	30	23.24	17.78	27.04
10	10.54	5.08	14.34	34	25.78	20.32	29.58
12	11.81	6.35	15.61	40	29.59	24.13	33.39
14	13.08	7.62	16.88	44	32.13	26.67	35.93
16	14.35	8.89	18.15	50	35.94	30.48	39.74
18	15.62	10.16	19.42	52	37.21	31.75	41.01
20	16.89	11.43	20.69	60	42.29	36.83	46.09
24	19.43	13.97	23.23	64	44.83	39.37	48.63
26	20.70	15.24	24.50				

RoHS Compliant

DRAWN:

GENERAL TOLERANCE:

.X=±0.20

.XX=±0.15

CHECKED:

UNIT: MM

DESCRIPTION: 1.27x1.27mm Flat Cable IDC Socket
With Strain Relief

SIZE

APPROVAL:

SCALE: 1:1

SHEET: 1 / 2

PART NO:

3230-XX-0103-00

A4


REV

DATE

FILE

BY

PROJECTION:



CnC Tech

Industrial Cable and Connector Technology

A

B

C

D