

NOTES:


1. MATERIALS AND FINISHES:
 BODY - BRASS, NICKEL PLATING
 CONTACT - PHOSPHOR BRONZE, GOLD PLATING
 INSULATOR - PTFE, NATURAL
2. ELECTRICAL:
 A. IMPEDANCE: 50 OHM
 B. FREQUENCY RANGE: DC - 11 GHz
 C. DIELECTRIC WITHSTANDING VOLTAGE: 2500 VRMS, MIN.
3. MECHANICAL:
 A. DURABILITY: 500 CYCLES MIN.
 B. TEMPERATURE RANGE: -65° C TO +165° C
4. THIS CONNECTOR IS COVERED BY U.S. P. PATENT 3, 439, 294 & 3, 474, 391
5. PACKAGING:
 A. QUANTITY: SINGLE PACK
 B. MARKING: BAG TO BE MARKED
 "AMPHENOL RF, 82-5374, AND DATE CODE"
6. CABLE ASSEMBLY INSTRUCTIONS:
 A. TRIM CABLE AS SHOWN.
 B. SLIDE FERRULE ONTO THE CABLE.
 C. CRIMP OR SOLDER CABLE CENTER CONDUCTOR TO CENTER CONTACT.
 CRIMP CONTACT PIN TO CABLE WITH AMPHENOL TOOL 227-944 AND DIE SET
 227-1221-57, CLOSURE 'B' (0.100" HEX)
 D. INSERT CENTER CONTACT INTO CONNECTOR WITH BRAID OVER THE REAR BODY
 AND CRIMP FERRULE WITH AMPHENOL TOOL 227-944, (M22520/5-01) AND DIE SET
 227-1221-57, CAVITY 'A' (0.213" HEX) (M22520/5-57, CLOSURE 'A').

7 SHOWS CABLE ENTRY DIMENSIONS.





THIRD ANGLE PROJ.

REVISIONS

| REV | DESCRIPTION | DATE | ECO | APPR |
|-----|------------------|-----------|-------|------|
| C | SEE SHEET 1 | 02-Dec-04 | -- | SH |
| T | SEE SHEET 1 | 24-Aug-09 | 47747 | SH |
| U | REDRAWN IN PRO-E | 29-May-15 | 49810 | RAK |

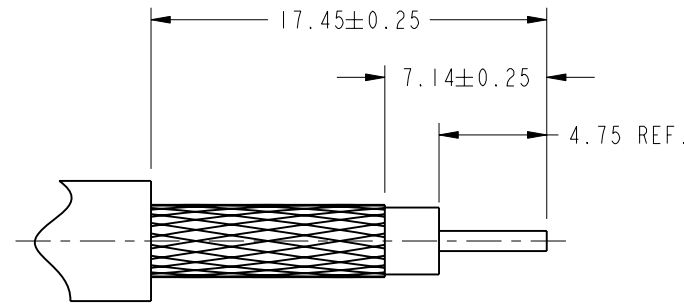

RECOMMENDED CABLE STRIPPING DIMENSIONS

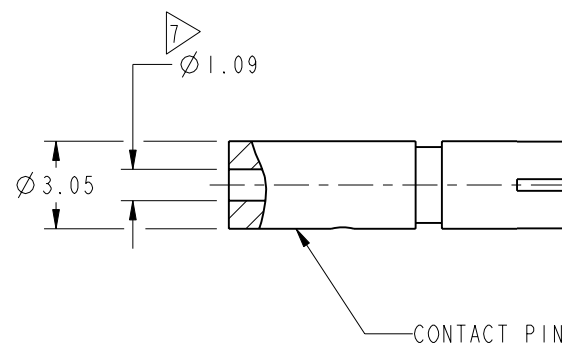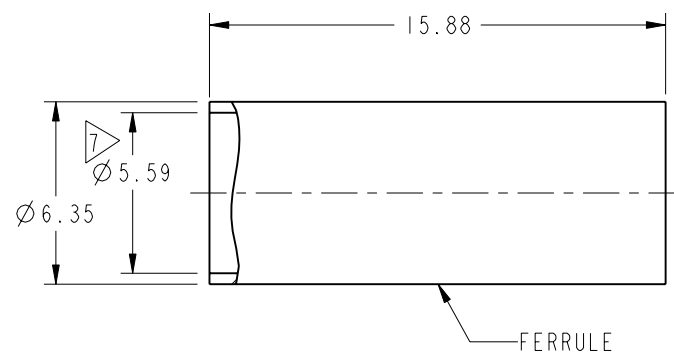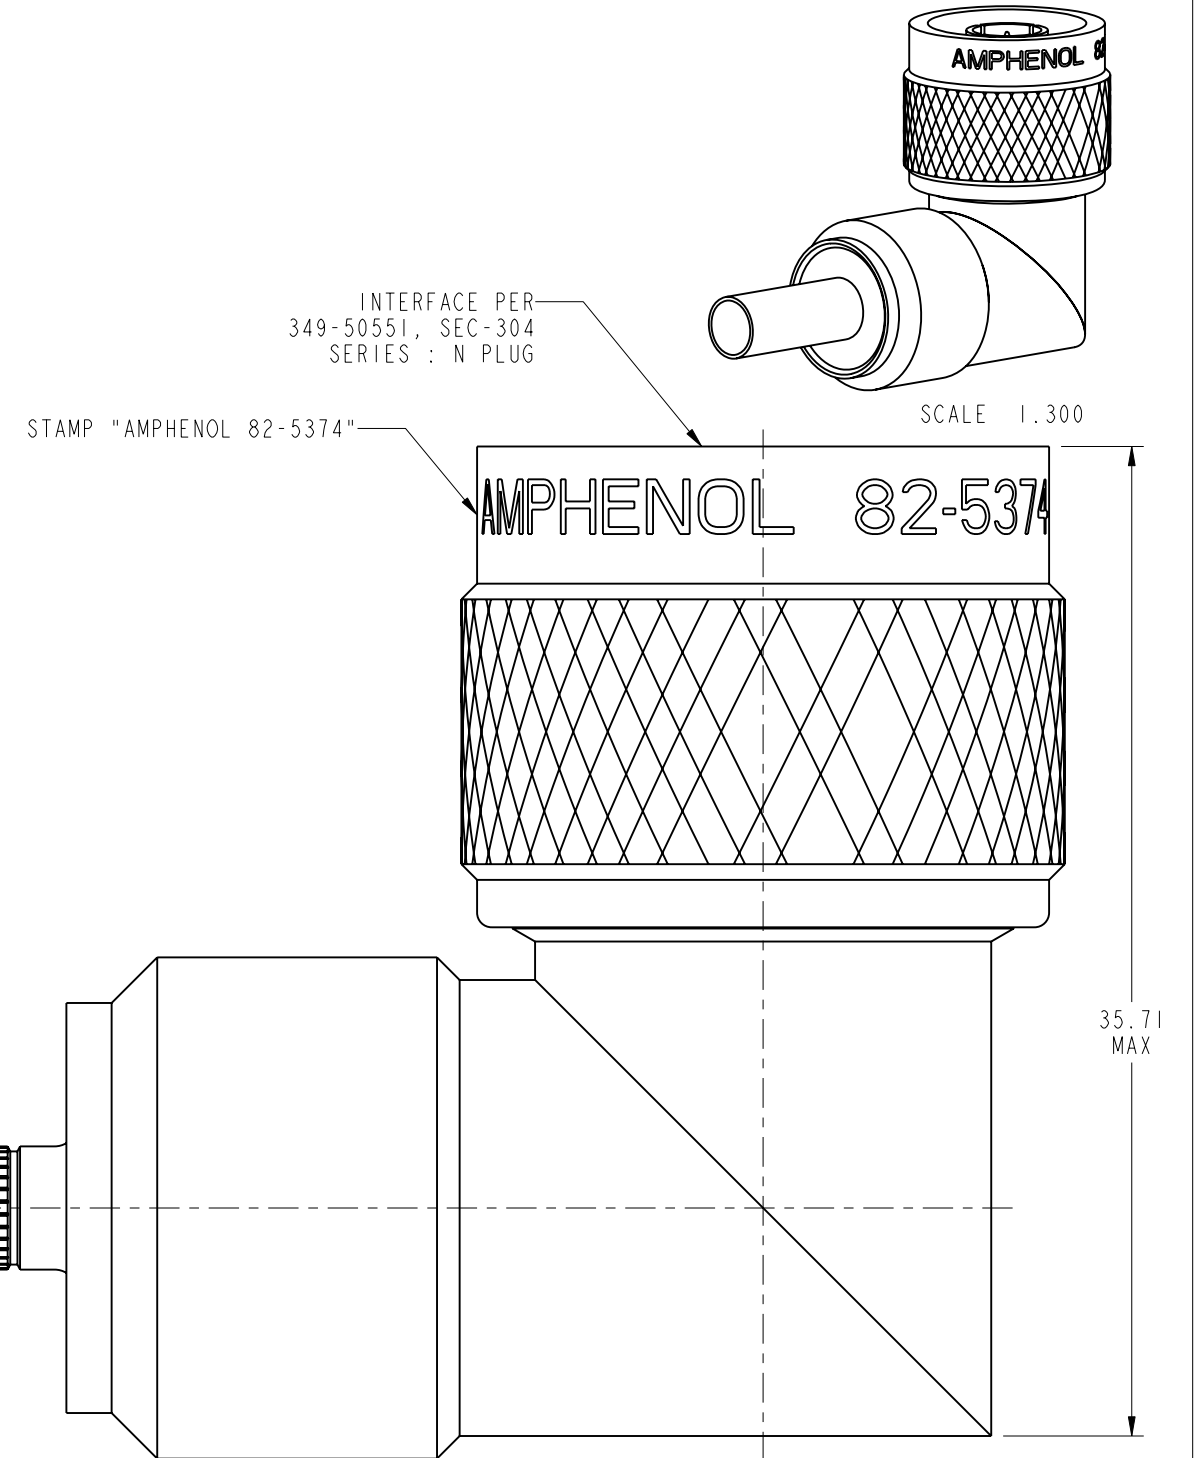

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:
 < 0.5mm ± 0.05mm 0.5 - 6mm ± 0.1mm 6 - 30mm ± 0.2mm 30 - 120mm ± 0.3mm ANGLES ± 1°

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

| | |
|-----------|---|
| MATERIAL | SEE NOTES |
| REFERENCE | EPA 802145-51 MOTOROLA 28009835F02 EAR 964616-0 |
| FINISH | |

| | | | |
|----------|----------|------|-----------|
| DRAWN | STAR | DATE | 29-May-15 |
| ENGINEER | S. HSIEH | DATE | 02-Dec-04 |
| APPROVED | S. HSIEH | DATE | 29-May-15 |
| CAD FILE | | | |

| | |
|--|--------------|
| TITLE | |
| QUICK CRIMP 'N' RIGHT ANGLE PLUG FOR RG55/U, 55A/U, 55B/U, 142/U, 142B/U, 223/U CABLES | |
| SCALE: 3.8:1.0 | SHEET 2 OF 2 |
| DWG SIZE B | REV U |

| | |
|---------------------|--|
| Amphenol RF | |
| www.amphenolrf.com | |
| DRAWING NO. 82-5374 | |
| ITEM NO. 82-5374 | |
| PART NO. 82-5374 | |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[82-5374](#) [082-5374](#)