REV	DATE	ECN NO.	APPVD BY	REL BY
A	2-7-01	UM2001-0239 PROD. REL		

PART NO.	LENGTH
845979013	20′
845979014	50′
845979015	75′
845979016	25′
845979017	30′
845979018	40′
845979019	100′

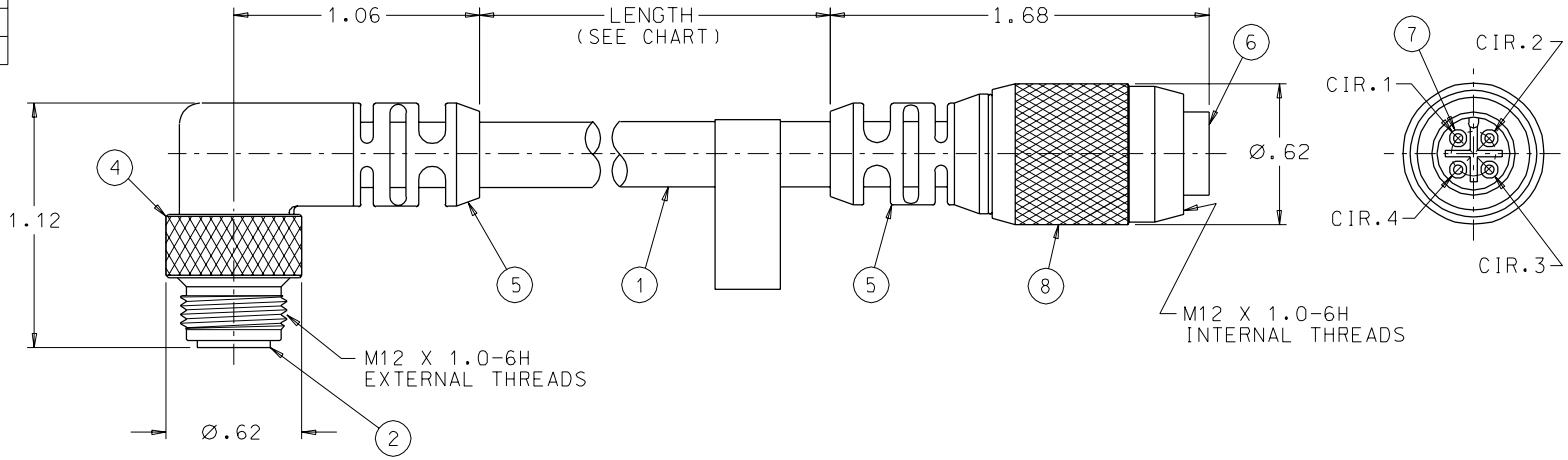

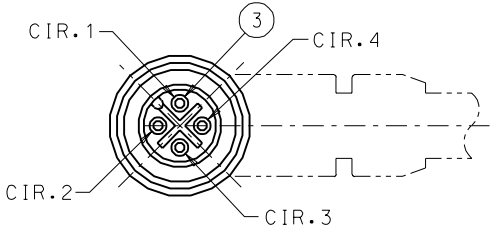



WIRING DIAGRAM

UL AND C(UL) RECOGNIZED
SPECIFICATIONS:
VOLTAGE RATING-250V
CURRENT RATING-7 AMPS

ITEM	QTY	DESCRIPTION	MATERIAL/FINISH
8	1	COUPLING RING, INT. THREAD	BRASS/NICKEL PLATED
7	4	CONTACT, SOCKET	CU ALLOY/GOLD PLATED
6	1	INSERT, SOCKET	NYLON/COLOR:BLACK
5	2	MOLDED BODY	PVC/COLOR:YELLOW
4	1	COUPLING RING, EXT. THREAD	BRASS/NICKEL PLATED
3	4	CONTACT, PIN	CU ALLOY/GOLD PLATED
2	1	INSERT, PIN	NYLON/COLOR:BLACK
1	SEE CHART	CABLE, SJOOW-A, 18 AWG	RUBBER JACKET/COLOR:YELLOW

QUALITY SYMBOLS
MAJOR =
CRITICAL (C) =
SPC (S) =

UNLESS SPECIFIED:
ALL DIMENSIONS IN INCHES
GENERAL TOLERANCES:
3 PLACE ±.005
2 PLACE ±.01
ANGULAR ±2°

Uti-Mate CAGE CODE
58967

SCALE --
DWG SIZE B
THIRD ANGLE PROJECTION
REVISE ON CAD ONLY

DRAWN BY & DATE GF 2-7-01
CHECKED BY & DATE
APPROVED BY & DATE

TITLE: MICRO-C, PLUG, MALE/ FEMALE, DC KEY, 4 POLE, 18 AWG., RUBBER, EURO

MOLEX INCORPORATED
Orange, CA 92868

PART NO. SEE CHART
DRAWING NO. SD-84597-9013
SHEET NO. 1 OF 1
REV A

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

84597-9014 84597-9018