


1
2
3
4
5
6
7
8
F
E
D
C
B
A

Used for: D-SUB COMBINATION

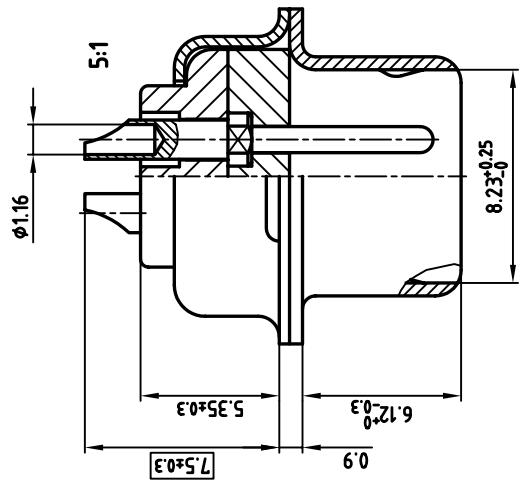

NOTES:





1. METAL SHELLS: STEEL; TIN PLATED
2. INSULATORS: PBT GF, UL 94 V-0; GREEN
3. CONTACTS: COPPER ALLOY
4. PLATING: MIN. 30 μ " HARD GOLD OVER MIN. 50 μ " NICKEL



THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GMBH
DO NOT ALTER CAD DRAWING BY HAND

title: D-SUB COMBINATION MALE
5W1P SOLDER CUP
dwg no: 13K1T8A
scale: 2:1 (5:1)
material: SEE NOTES

product no: 3005W1PCM99A10X
CONEC[®]
sh: 1/1

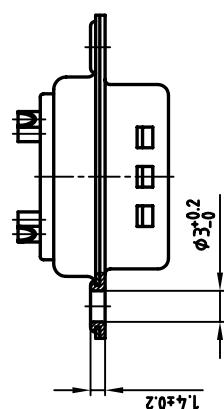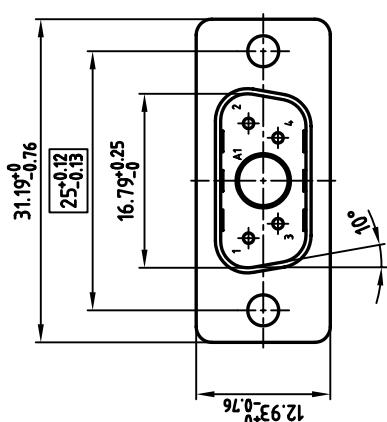

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

CONEC:

[3005W1PCM99A10X](#)