


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: 0449147003
Status: Active
Overview: Micro-Fit Connector System
Description: Micro-Fit CPI Header, Dual Row, Vertical, Compliant Pin Interface, 20 Circuits, LCP, Glass-Filled, UL 94V-0, 0.76µm Gold (Au) Selective Contact Plating, Tin (Sn) Plated Tails, Glow-Wire Capable

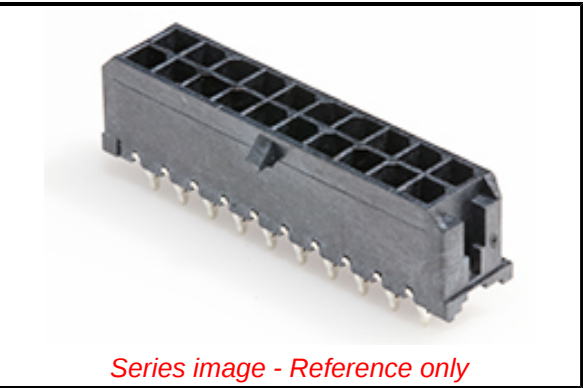

Documents:	
3D Model (PDF)	Test Summary TS-43045-001-001 (PDF)
3D Model	Test Summary TS-43045-002-001 (PDF)
Drawing (PDF)	Test Summary TS-46235-001-001 (PDF)
Product Specification PS-43045-001 (PDF)	RoHS Certificate of Compliance (PDF)
Packaging Specification PK-70873-0314-001 (PDF)	Product Literature (PDF)

Agency Certification	
CSA	LR19980
UL	E29179
Application tooling part link	
Application Tooling Part Link	62200-8400
Application Tooling Part Link	62203-0455
General	
Product Family	PCB Headers
Series	44914
Application	Power, Wire-to-Board
Comments	""""""""High Temperature Square Pin<P><P>This Molex product is manufactured from material that has the following ratings, tested by independent agencies:. a) A Glow Wire Ignition Temperature (GWIT) of at least 775 deg C per IEC 60695-2-13.. b) A Glow Wire Flammability Index (GWFI) above 850 deg C per IEC 60695-2-12.and hence complies with the requirements set out in the International Standard IEC 60335-1 5th edition - household and similar electrical appliances - safety, section 30 Resistance to heat and fire. <P><P> The customers using this product must determine its suitability for use in their particular application through testing or other acceptable means as described in end-product glow-wire flammability test standard IEC 60695-2-11 and any applicable product end-use standard(s). <P> If it is determined during the customer's evaluation of suitability, that higher performance is required, please contact Molex for possible product options.""""""""
Overview	Micro-Fit Connector System
Product Name	Micro-Fit CPI
UPC	822350766500
Physical	
Breakaway	No
Circuits (Loaded)	20
Circuits (maximum)	20
Color - Resin	Black
Durability (mating cycles max)	30
Flammability	94V-0
Glow-Wire Capable	Yes

EU ELV Not Relevant	
EU RoHS Compliant REACH SVHC Not Contained Per - ECHA_01_2020 (16 January 2020 Halogen-Free Status Low-Halogen For more information, please visit Contact US	China RoHS
China ROHS ELV RoHS Phthalates	Green Image Not Relevant Not Contained

Search Parts in this Series 44914 Series	
Mates With 430252000 Micro-Fit 3.0 Receptacle Housing	
Application Tooling FAQ <i>Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.</i> Global	
Description	Product #
Compliant Pin Insertion Flat Rock Tool	622008400
Removal Tool	622030455

Lock to Mating Part	Yes
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	2.677/g
Number of Rows	2
Orientation	Vertical
PCB Locator	Yes
PCB Retention	Yes
Packaging Type	Tray
Pitch - Mating Interface	3.00mm
Plating min - Mating	0.762μm
Plating min - Termination	2.540μm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Fully
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Through Hole - Compliant Pin
Electrical	
Current - Maximum per Contact	8.5A
Voltage - Maximum	600V
Solder Process Data	
Lead-freeProcess Capability	N/A
Material Info	
Reference - Drawing Numbers	
Packaging Specification	PK-70873-0314-001
Product Specification	PS-43045-001
Sales Drawing	SD-44914-002-001
Symbol/Footprint Data	SYM-44914-2001
Test Summary	TS-43045-001-001, TS-43045-002-001, TS-46235-001-001

This document was generated on 04/20/2020

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[44914-7003](#)