



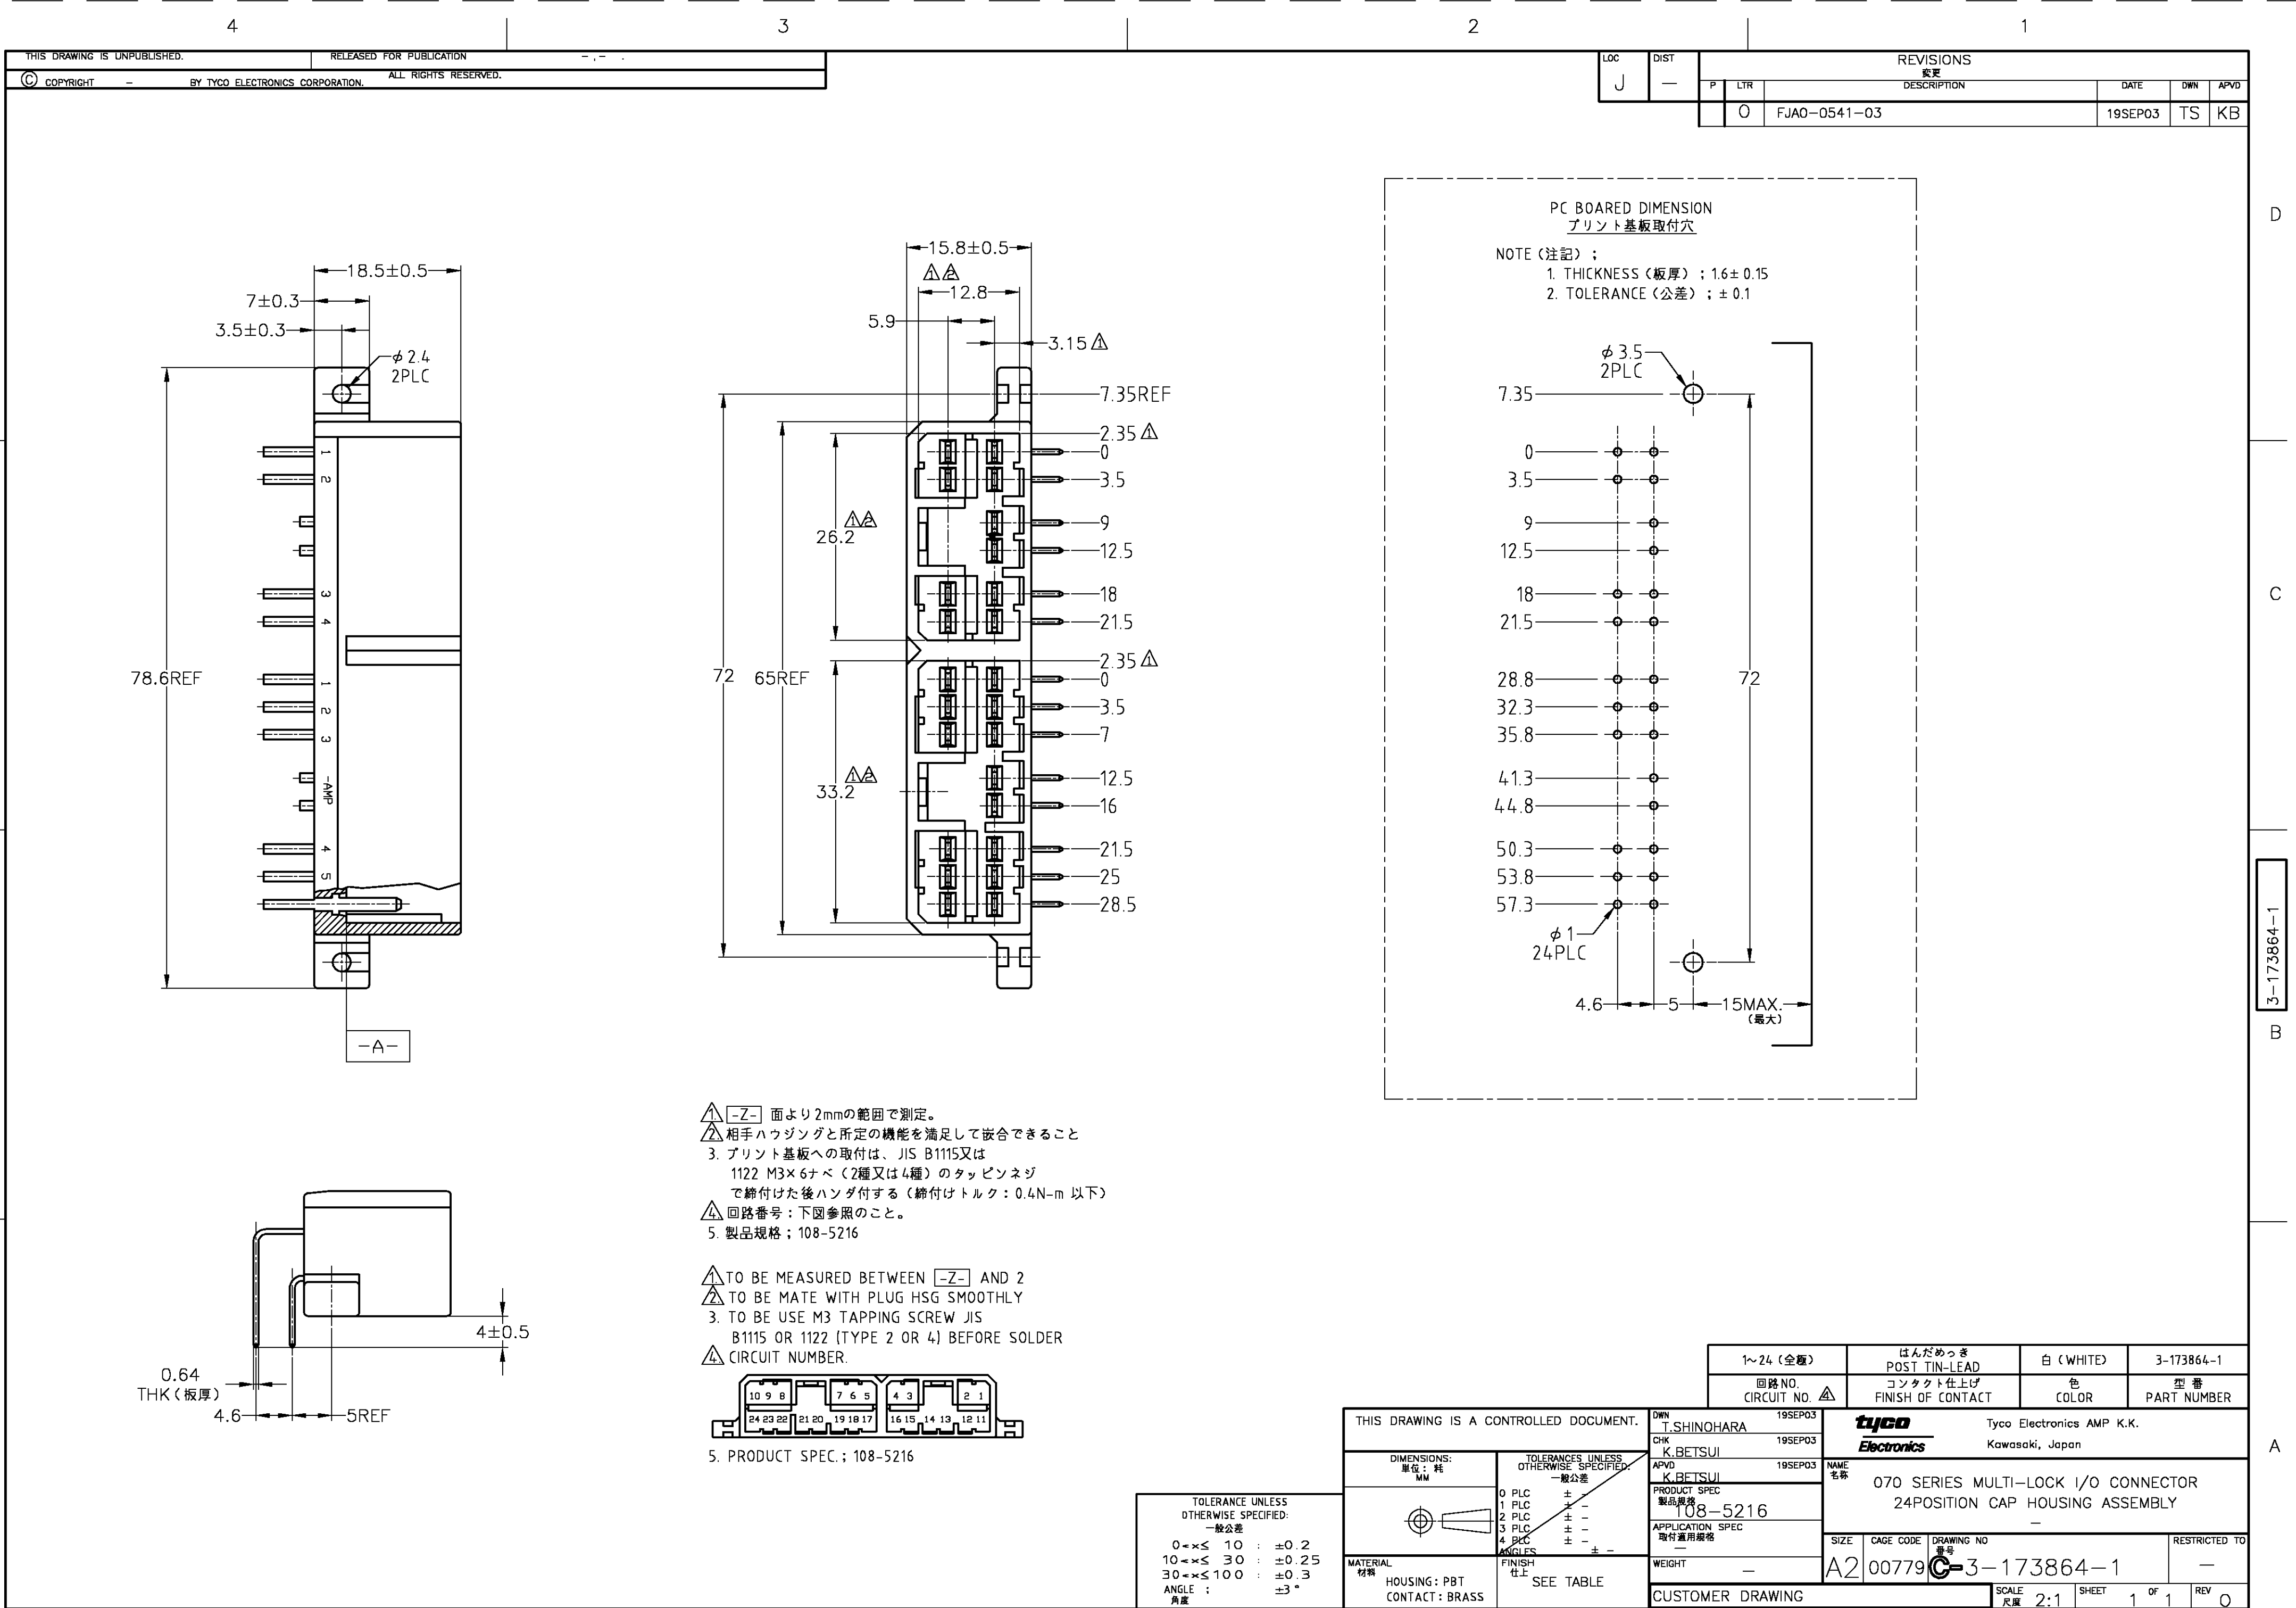

- △ [-Z-] 面より2mmの範囲で測定。
- △ 相手ハウジングと所定の機能を満足して嵌合できること
- 3. プリント基板への取付は、JIS B1115又は1122 M3×6ナベ（2種又は4種）のタッピンネジで締付けた後ハンダ付する（締付けトルク：0.4N・m 以下）
- △ 回路番号：下図参照のこと。
- 5. 製品規格；108-5216

- △ TO BE MEASURED BETWEEN [-Z-] AND 2
- △ TO BE MATE WITH PLUG HSG SMOOTHLY
- 3. TO BE USE M3 TAPPING SCREW JIS B1115 OR 1122 (TYPE 2 OR 4) BEFORE SOLDER
- △ CIRCUIT NUMBER.

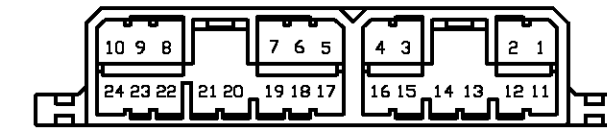

5. PRODUCT SPEC.; 108-5216

TOLERANCE UNLESS OTHERWISE SPECIFIED: 一般公差	
0<X≤ 10	: ±0.2
10<X≤ 30	: ±0.25
30<X≤ 100	: ±0.3
ANGLE ; 角度	: ±3°

THIS DRAWING IS A CONTROLLED DOCUMENT.	
DIMENSIONS: 単位：mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差
0 PLC ±	1 PLC ±
2 PLC ±	3 PLC ±
4 PLC ±	ANGLES ±
MATERIAL 材料	FINISH 仕上
HOUSING: PBT	CONTACT: BRASS
SEE TABLE	

DWN I.SHINOHARA	19SEP03
CHK K.BETSUI	19SEP03
APVD K.BETSUI	19SEP03
PRODUCT SPEC 製品規格	108-5216
APPLICATION SPEC 取付適用規格	-
WEIGHT	-
CUSTOMER DRAWING	

1~24 (全額)	はんだめっき POST TIN-LEAD	白 (WHITE)	3-173864-1
回路NO. CIRCUIT NO. △	コンタクト仕上げ FINISH OF CONTACT	色 COLOR	型番 PART NUMBER
Tyco Electronics AMP K.K. Kawasaki, Japan			
070 SERIES MULTI-LOCK I/O CONNECTOR 24POSITION CAP HOUSING ASSEMBLY			
SIZE A2	CAGE CODE 00779	DRAWING NO 3-173864-1	RESTRICTED TO
SCALE 尺度 2:1		SHEET 1 OF 1	REV 0

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-173864-1](#)