

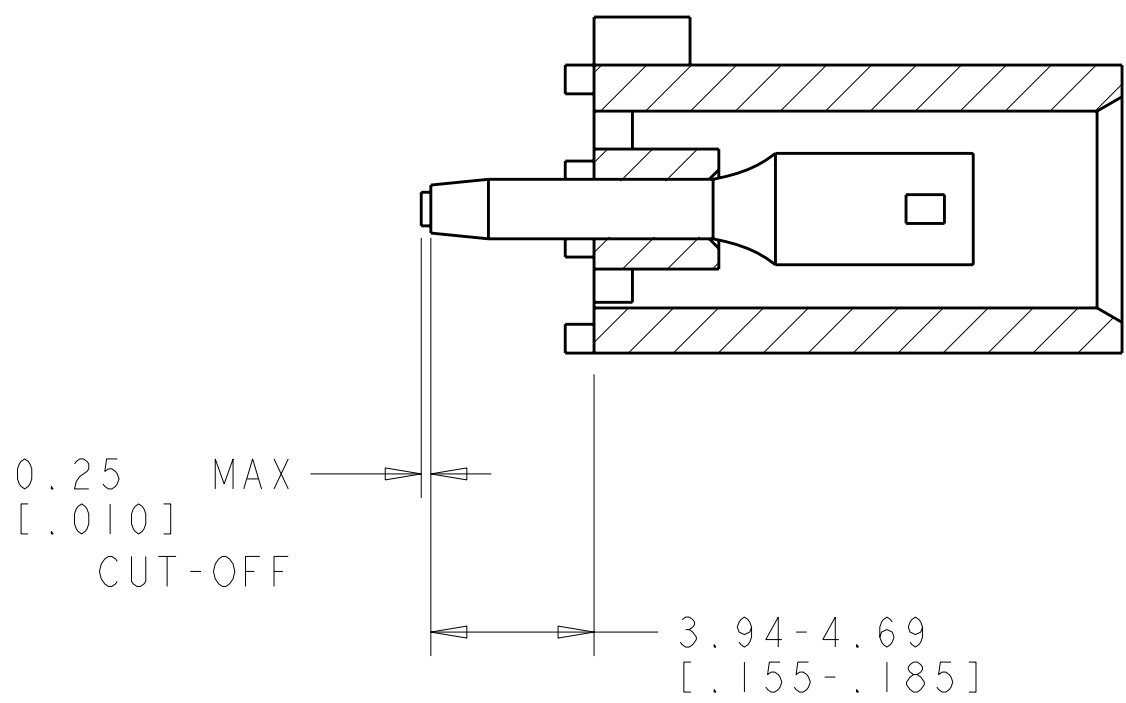
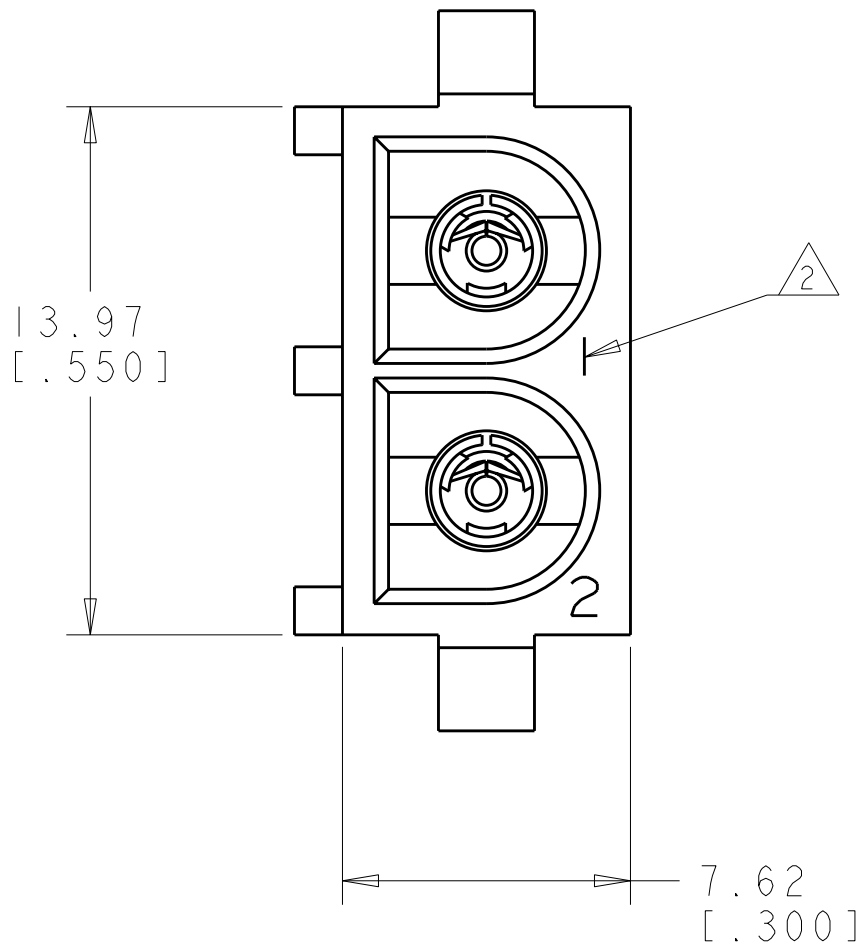
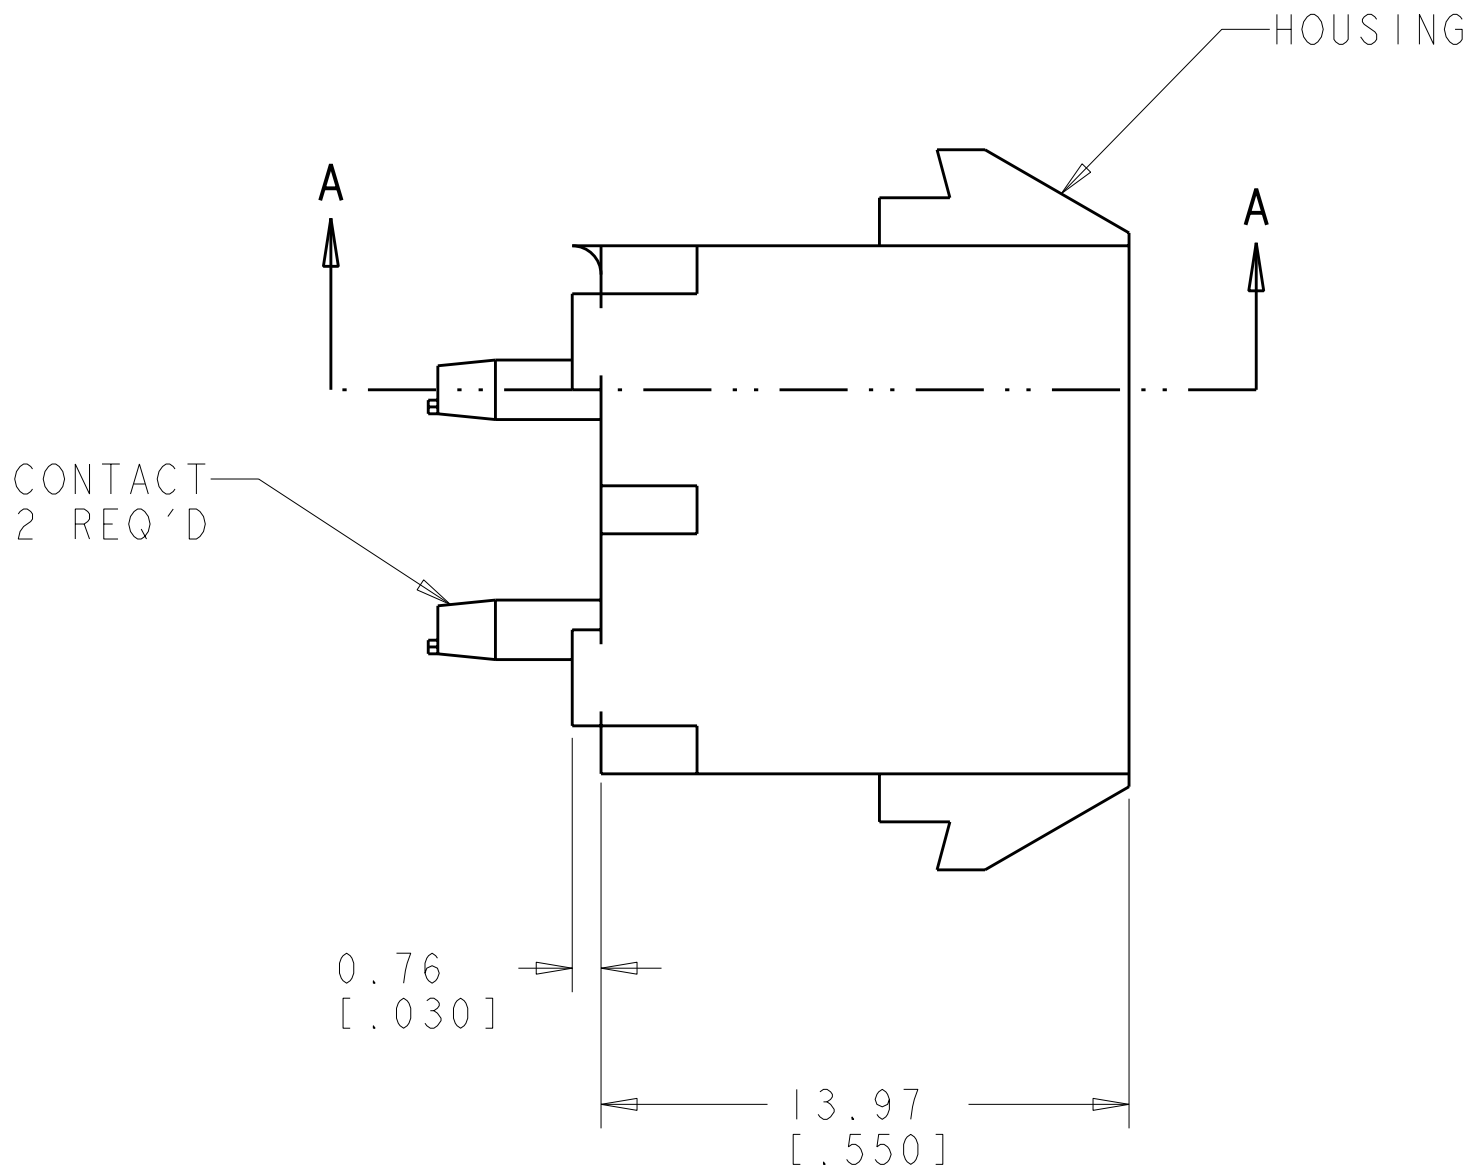



LOC		DIST		REVISIONS			
CM	00	F	LYR	DESCRIPTION	DATE	DWN	APVD
			B	REV PER ECR 10-018921	15SEP110	JR	TM

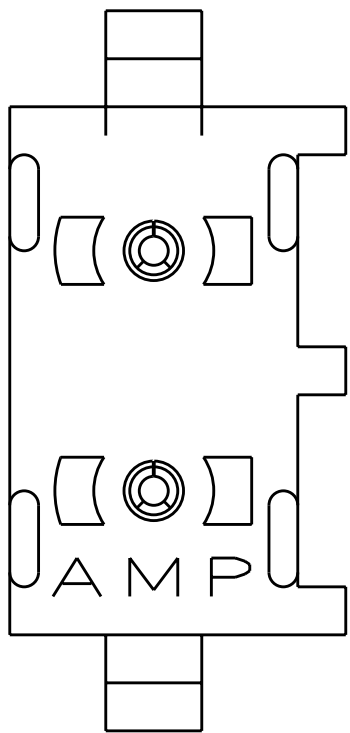

SECTION A-A

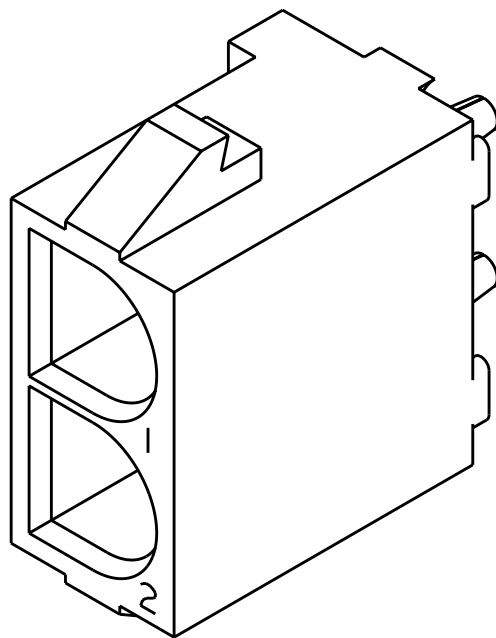

3 DIMENSIONAL VIEW
SCALE 4:1

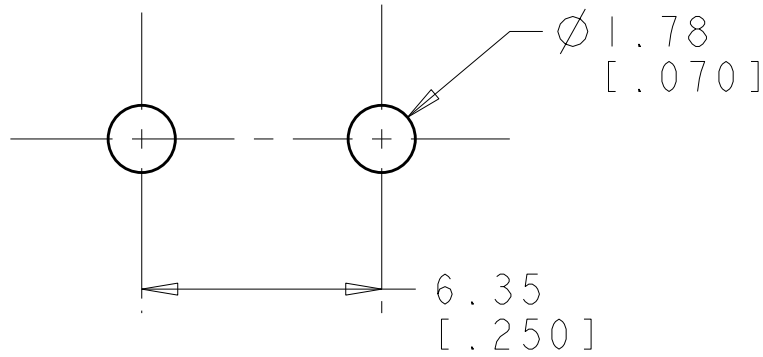

RECOMMENDED MOUNTING HOLE PATTERN
FOR 1.57 [.062] THICK P.C. BOARD

1. PARTS COMPLY TO TYCO ELECTRONICS SOLDERABILITY SPECIFICATION 109-11-2.

2. CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.

3. DIMENSIONS IN BRACKETS ARE IN INCHES.

4. FLAMMABILITY V-2 FOR THICKNESS 0.38mm, 0.75mm, 1.5mm AND 3.0mm PER IEC 60695-11-10.

5. GLOW-WIRE FLAMMABILITY (GWFI) 800°C FOR THICKNESS 0.38mm AND 0.75mm PER IEC 60695-2-12.

6. GLOW-WIRE FLAMMABILITY (GWFI) 960°C FOR THICKNESS 1.5mm AND 3.0mm PER IEC 60695-2-12.

7. GLOW-WIRE IGNITION (GWIT) 825°C FOR THICKNESS 0.38mm 0.75mm, 1.5mm, AND 3.0mm PER IEC 60695-2-13.

PHOSPOR BRONZE, PRE-TIN	NYLON, UL94V-2, NATURAL	1586866-1
CONTACT MATERIAL AND FINISH	HOUSING MATERIAL AND COLOR	PART NUMBER

DIMENSIONS: mm[INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWN R. WHITAKER 12MAR2008		Tyco Electronics Harrisburg, PA 17105-3608	
9 PLC ±		12 PLC ±		CHK D. COLEY 12MAR2008		NAME	
3 PLC ±0.13(.005)		4 PLC ±		APVD D. COLEY 12MAR2008		PRODUCT SPEC	
ANGLES ±		FINISH ±		APPLICATION SPEC		SIZE CAGE CODE DRAWING NO	
MATERIAL SEE TABLE		SEE TABLE		WEIGHT -		RESTRICTED TO	
CUSTOMER DRAWING		SCALE 5:1		SHEET 1 OF 1		REV B	



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1586866-1](#)