

Main

Commercial Status	Commercialised
Range of product	Zelio Control
Product or component type	Modular measurement and control relays
Relay type	Voltage control relay
Product specific application	For single-phase and DC supply
Relay name	RM17UAS
Relay monitored parameters	Overtoltage or undervoltage detection Self-powered
Time delay	Adjustable 0.1...10 s, 0 + 10 % on crossing the threshold
Switching capacity in VA	1250 VA
Minimum switching current	10 mA at 5 V DC
Maximum switching current	5 A AC/DC
Power consumption in VA	<= 3 VA AC
Measurement range	65...260 V voltage DC 65...260 V voltage AC 50/60 Hz
Electrical connection	2 conductors cable 0.5...2.5 mm ² AWG20...AWG14 solid cable without cable end conforming to IEC 60947-1 2 conductors cable 0.2...1.5 mm ² AWG24...AWG16 flexible cable with cable end conforming to IEC 60947-1 1 conductor cable 0.5...4 mm ² AWG20...AWG11 solid cable without cable end conforming to IEC 60947-1 1 conductor cable 0.2...2.5 mm ² AWG24...AWG12 flexible cable with cable end conforming to IEC 60947-1
Utilisation category	DC-14 conforming to IEC 60947-5-1 DC-13 conforming to IEC 60947-5-1 DC-12 conforming to IEC 60947-5-1 AC-15 conforming to IEC 60947-5-1 AC-14 conforming to IEC 60947-5-1 AC-13 conforming to IEC 60947-5-1 AC-12 conforming to IEC 60947-5-1

Complementary

Reset time	1500 ms for time delay
Maximum switching voltage	250 V AC/DC
[Us] rated supply voltage	110...240 V AC/DC
Supply voltage limits	50...270 V AC/DC
Power consumption in W	<= 1 W DC
Control circuit frequency	50...60 Hz +/- 10 %
Output contacts	1 C/O
Nominal output current	5 A
Measuring cycle	<= 150 ms measurement cycle as true rms value
Hysteresis	5...20 % of threshold setting
Delay at power up	<= 500 ms AC <= 100 ms DC
Measurement accuracy	+/- 10 % of the full scale value

Repeat accuracy	+/- 1 % for time delay +/- 0.5 % for input and measurement circuit
Measurement error	0.2 %/°C with temperature variation < 1 % over the whole range with voltage variation
Polarity	Non reversible polarity on DC supply
Marking	CE : 73/23/EEC CE : EMC 89/336/EEC
Overvoltage category	III conforming to IEC 60664-1
Insulation resistance	> 500 MOhm at 500 V DC conforming to IEC 60664-1 > 500 MOhm at 500 V DC conforming to IEC 60255-5
[Ui] rated insulation voltage	400 V conforming to IEC 60664-1 250 V conforming to IEC 60664-1
Supply frequency	50/60 Hz +/- 10 %
Operating position	Any position without derating
Tightening torque	0.6...1 N.m conforming to IEC 60947-1
Housing material	Self-extinguishing plastic
Status LED	1 LED yellow for relay ON 1 LED green for power ON
Mounting support	35 mm symmetrical DIN rail conforming to EN/IEC 60715
Electrical durability	100000 cycles
Mechanical durability	<= 30000000 cycles
Operating rate	<= 360 operations/hour under full load
Width	17.5 mm
Product weight	0.08 kg

Environment


Immunity to microbreaks	20 ms
Electromagnetic compatibility	Immunity for industrial environments conforming to NF EN/IEC 61000-6-2 Emission standard for residential, commercial and light-industrial environments conforming to EN/IEC 61000-6-3 Emission standard for industrial environments conforming to EN/IEC 61000-6-4
Standards	EN/IEC 60255-6
Product certifications	CSA C-Tick GL GOST UL
Ambient air temperature for storage	-40...70 °C
Ambient air temperature for operation	-20...50 °C
Relative humidity	95 % at 55 °C conforming to IEC 60068-2-30
Vibration resistance	1 gn (f = 57.6...150 Hz) conforming to IEC 60068-2-6/IEC 60255-21-1 0.35 mm (f = 5...57.6 Hz) conforming to IEC 60068-2-6/IEC 60255-21-1
Shock resistance	5 gn conforming to IEC 60068-2-27
IP degree of protection	IP30 (casing) conforming to IEC 60529 IP20 (terminals) conforming to IEC 60529
Pollution degree	3 conforming to IEC 60664-1
Dielectric test voltage	2 kV AC 50 Hz, 1 min conforming to IEC 60664-1 2 kV AC 50 Hz, 1 min conforming to IEC 60255-5
Non-dissipating shock wave	4 kV conforming to IEC 61000-4-5 4 kV conforming to IEC 60664-1 4 kV conforming to IEC 60255-5

Contractual warranty

Period	18 months
--------	-----------


Single-Phase and DC Voltage Control Relays

Dimensions and Mounting

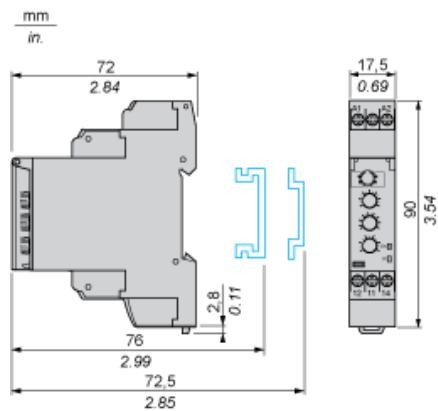


Single-Phase and DC Voltage Control Relays

Wiring Diagram



Application Scheme

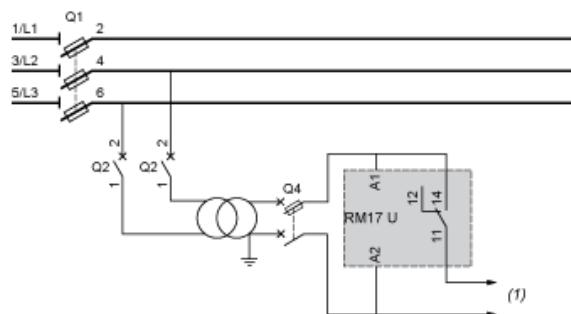


(1) To sensitive loads

Function Diagrams

Undervoltage Control

Without memory ("No Memory" mode)

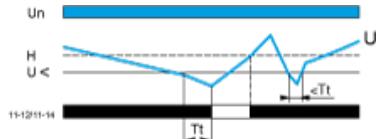

Tt Time delay after crossing of threshold (adjustable from 0.1 s to 10 s)

Un Nominal supply voltage

U Monitored supply voltage


H Hysteresis adjusted by means of a potentiometer graduated from 5...20% of the threshold setting

U< Undervoltage threshold (set by means of a graduated potentiometer)

11-12/11-14 relay connections (refer to Connections and Schema)

Relay status: black color = energized.

With memory ("Memory" mode)

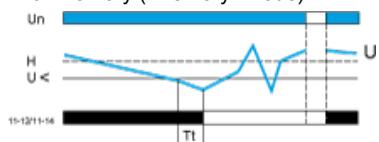

Tt Time delay after crossing of threshold (adjustable from 0.1 s to 10 s)

Un Nominal supply voltage

U Monitored supply voltage

H Hysteresis adjusted by means of a potentiometer graduated from 5...20% of the threshold setting

U< Undervoltage threshold (set by means of a graduated potentiometer)


11-12/11-14 relay connections (refer to Connections and Schema)

Relay status: black color = energized.

In "Memory" mode, the relay opens when crossing of the threshold is detected and then stays in that position. The power supply voltage must be switched off to reset the product.

Overvoltage Control

Without memory ("No Memory" mode)

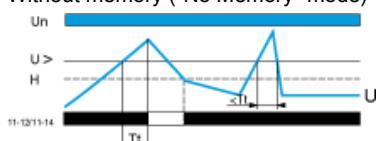

Tt Time delay after crossing of threshold (adjustable from 0.1 s to 10 s)

Un Nominal supply voltage

U Monitored supply voltage


H Hysteresis adjusted by means of a potentiometer graduated from 5...20% of the threshold setting

U> Overvoltage threshold (set by means of a graduated potentiometer)

11-12/11-14 relay connections (refer to Connections and Schema)

Relay status: black color = energized.

With memory ("Memory" mode)

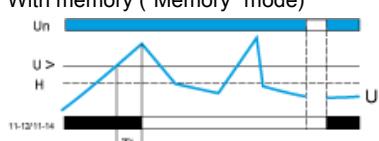

Tt Time delay after crossing of threshold (adjustable from 0.1 s to 10 s)

Un Nominal supply voltage

U Monitored supply voltage

H Hysteresis adjusted by means of a potentiometer graduated from 5...20% of the threshold setting

U> Overvoltage threshold (set by means of a graduated potentiometer)

11-12/11-14 relay connections (refer to Connections and Schema)

Relay status: black color = energized.

In "Memory" mode, the relay opens when crossing of the threshold is detected and then stays in that position. The power supply voltage must be switched off to reset the product.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Schneider Electric:](#)

[RM17UAS15](#)