

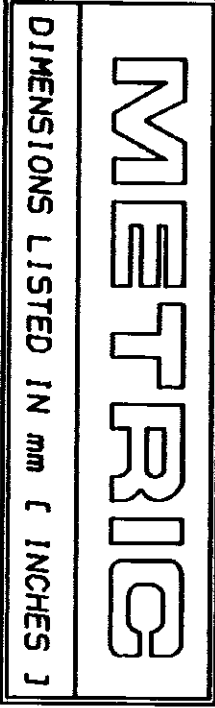


LOC		DIST		ZONE		LTR		REVISIONS		DATE	APPD
6	14	P	P					DESCRIPTION		2/20/94	DAF
				A				REVISED PER 0720-0230-93			

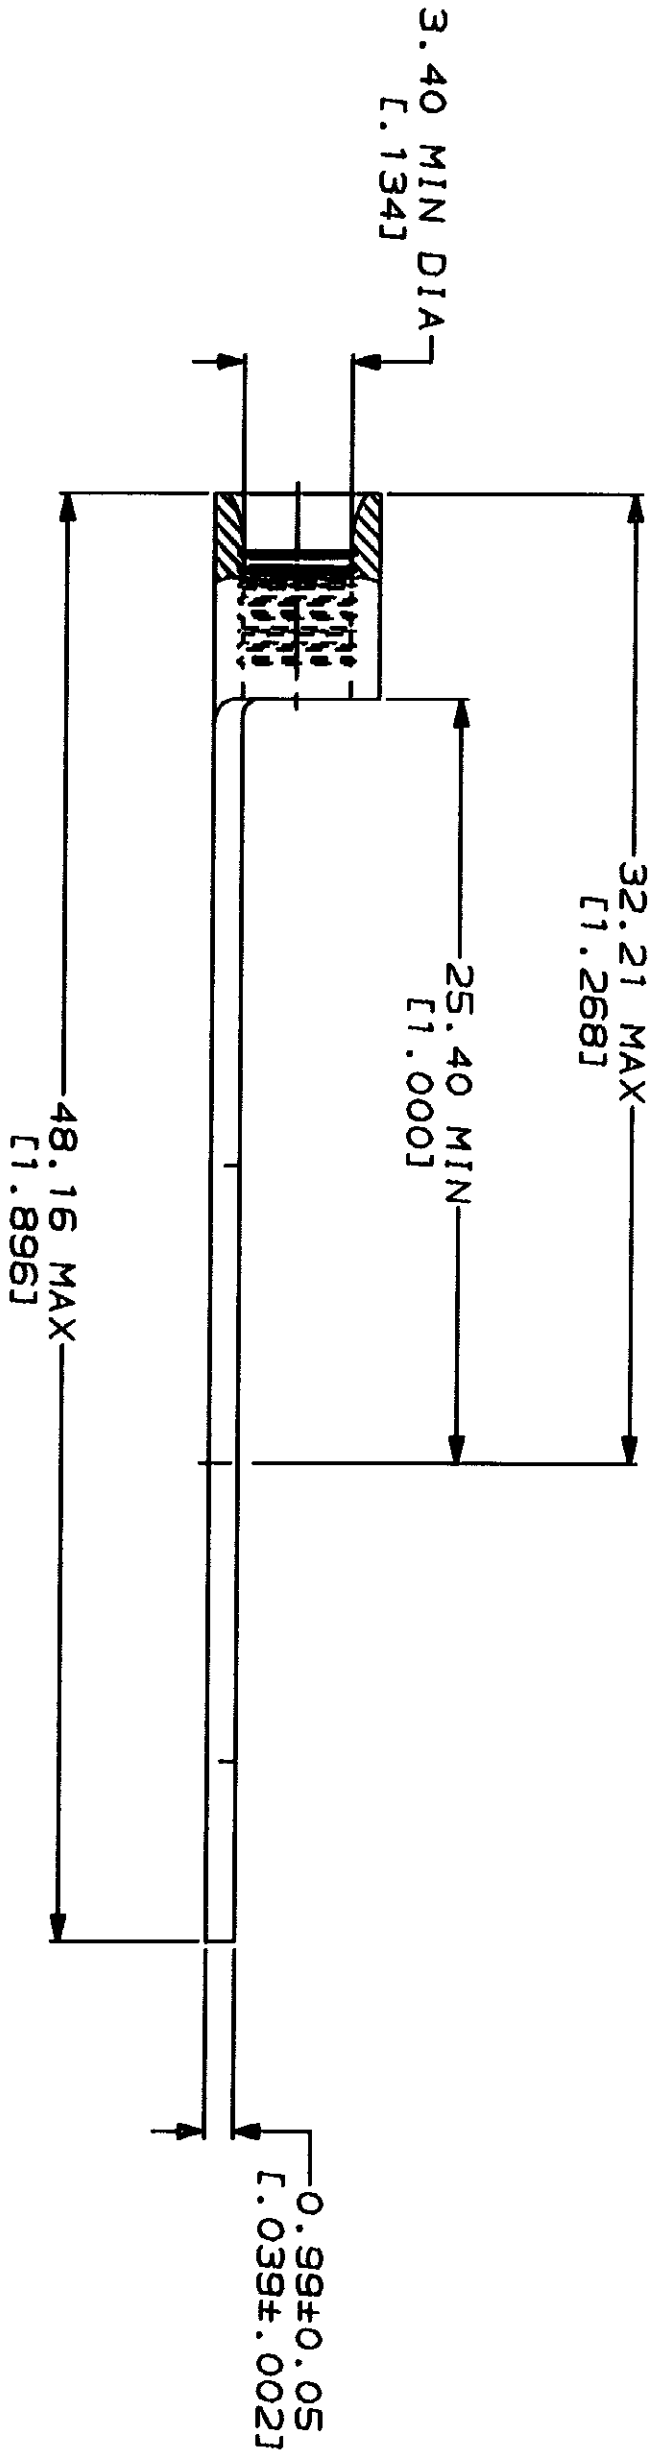

AMP WIRE RANGE		E13288 Listed	
12-10 AWG STRANDED		12-10 AWG STRANDED	
LR7189 Certified		MILITARY P/N AND CLASS	
NOT CERTIFIED		NOT APPLICABLE	

STAMP AMP 12-10* APPROX AS SHOWN

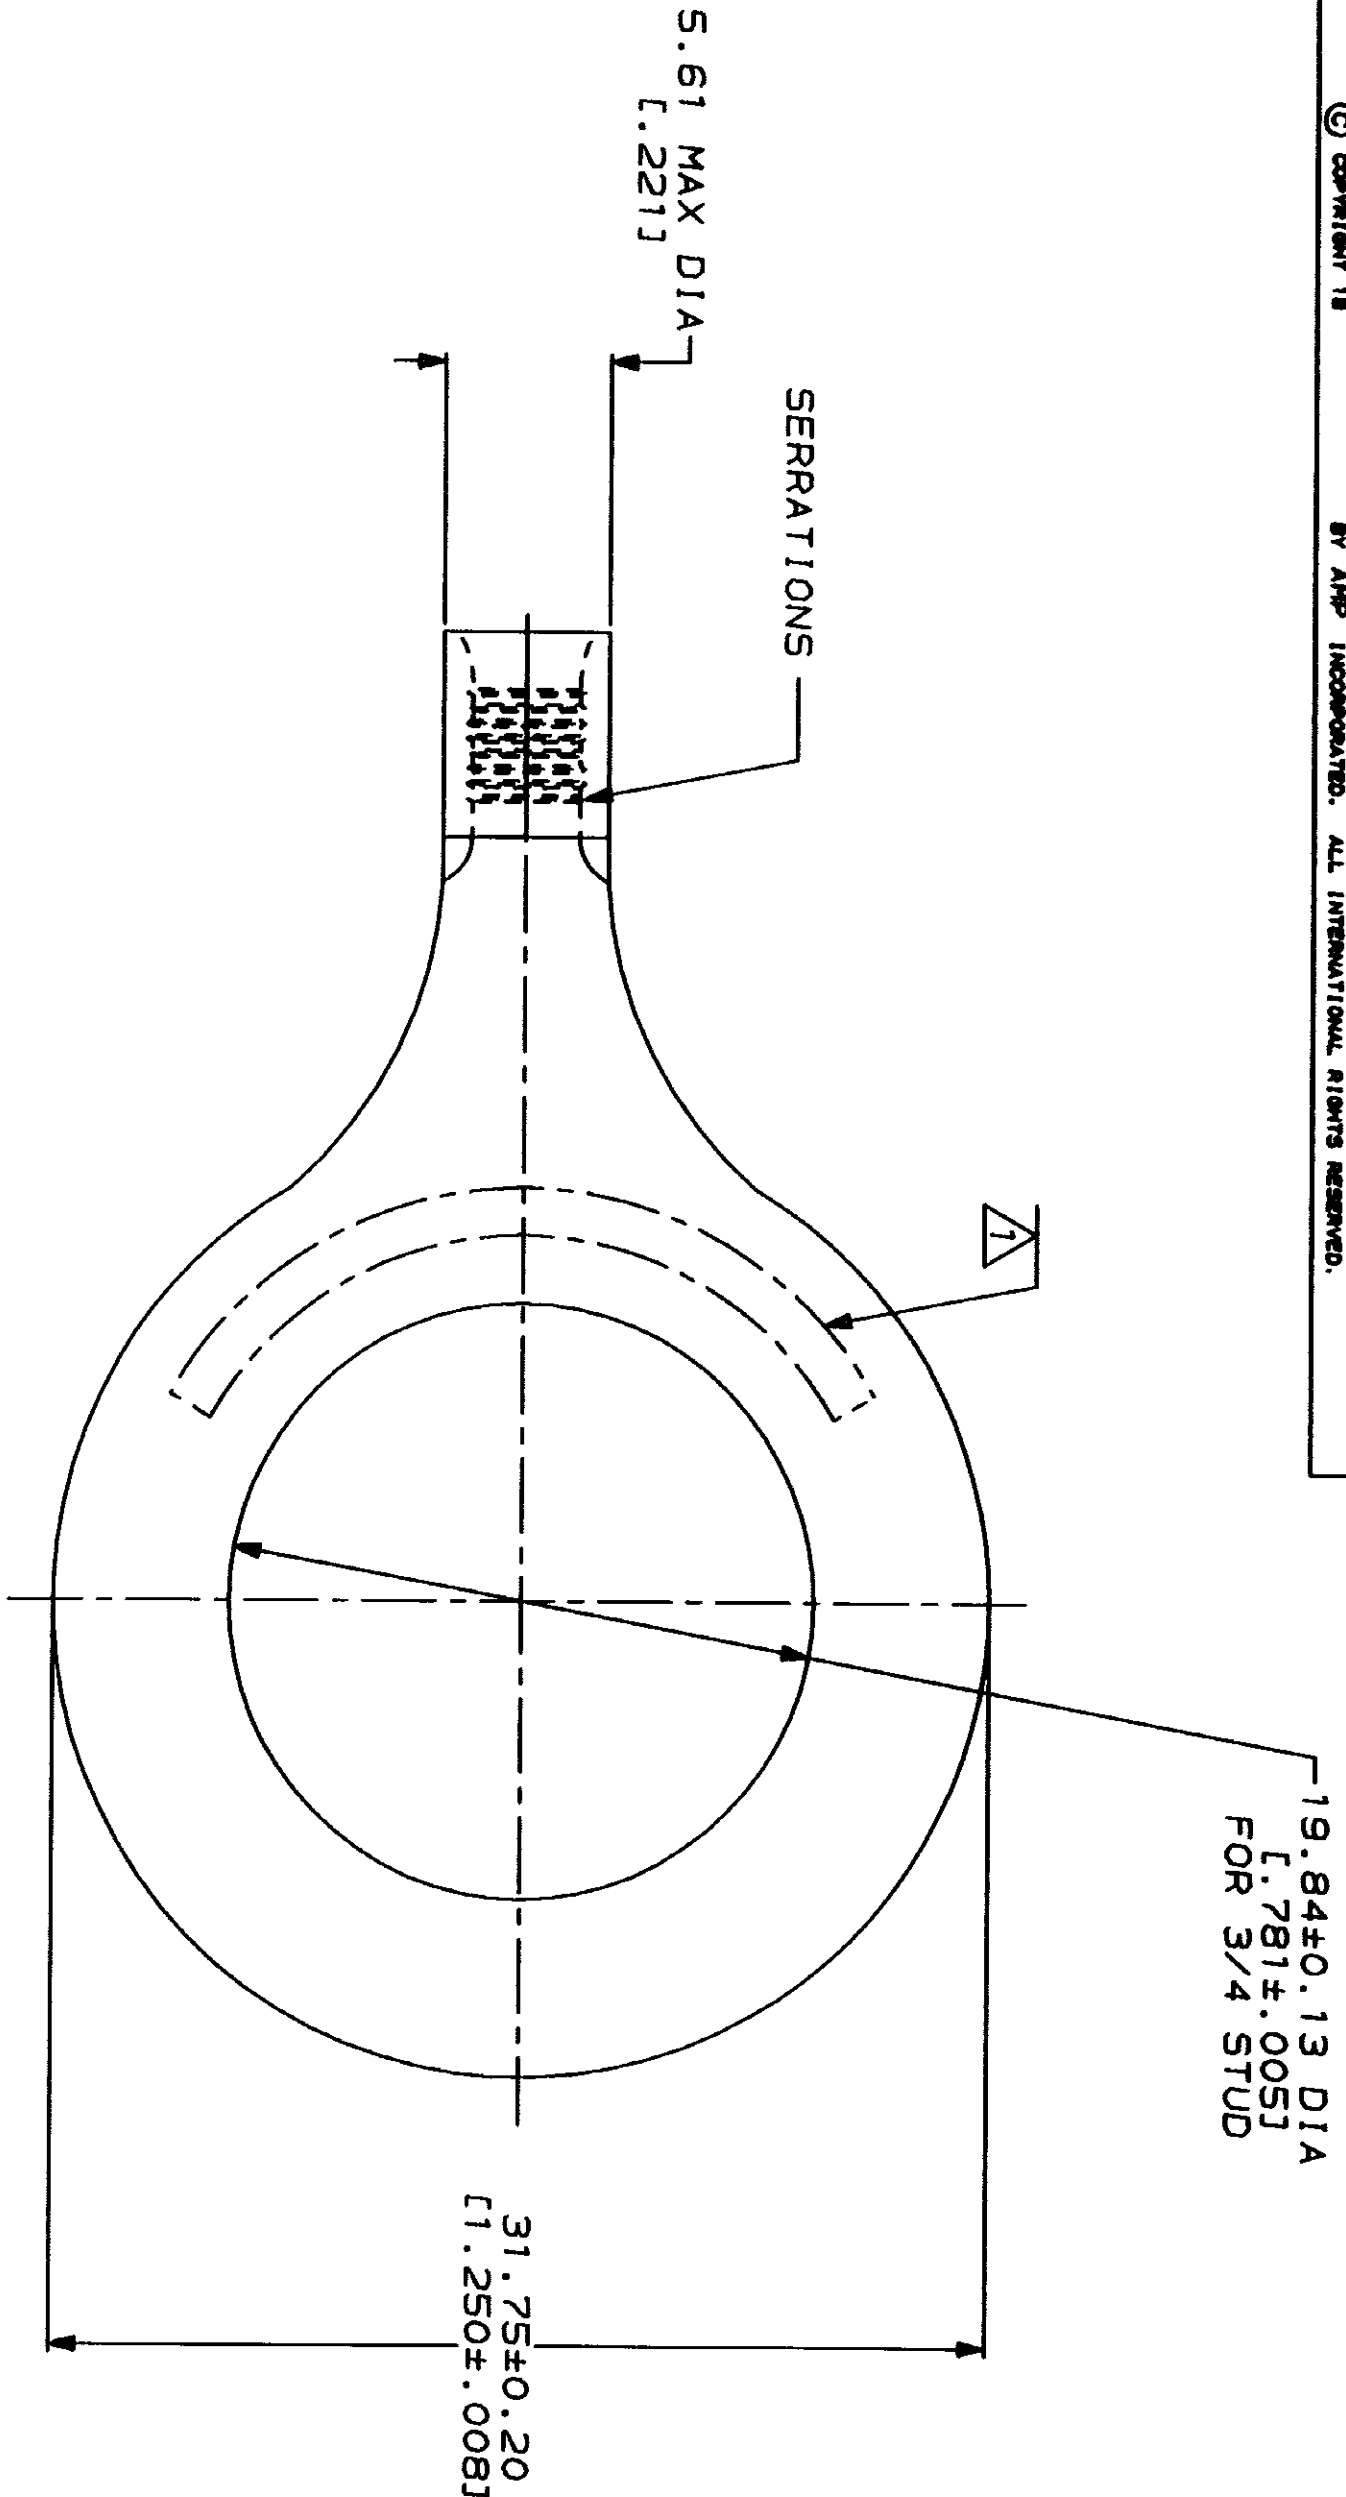

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 170°C MAX	
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: NOT APPLICABLE	
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	WIRE CROSS SECTIONAL AREA RANGE: 2.62-6.64mm² (5,180-13,100) CIR MILS STRANDED	
FOR ORDER ENTRY	1-800-526-5142	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONSULTED FOR THE LATEST REVISION.	

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm (INCHES) TOLERANCES ON: 2 PLC DEC ± . - 3 PLC DEC ± . - ANGLES		DR 2-9-93 TA BRINKMAN	
MATERIAL: COPPER PER ASTM B-152 ANNEALED		CHK 2-9-93 DA PATTERSON	
FINISH: TIN PLATE		APPD 2-9-93 DE MILLER	
0.00254 [1.000100] MIN THK PER MIL-T-10727		APPD 2-9-93 JL NECKLEY	
		PRODUCT SPEC	
		APPLICATION SPEC	
		WEIGHT	

AMP		AMP Incorporated Harrisburg, PA 17105-3608	
TERMINAL, RING TONGUE, BUDGET		NAME	
		SIZE	
		CAGE CODE	
		DRAWING NO	
		SCALE	
		SHEET	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[320762](#)