

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

(C) COPYRIGHT

LOC

DIST

REVISIONS

変更

P

LTR

DESCRIPTION

DATE

DWN

APVD




C3

REVISED PER ECR-16-010553

02AUG2017

BW

SG

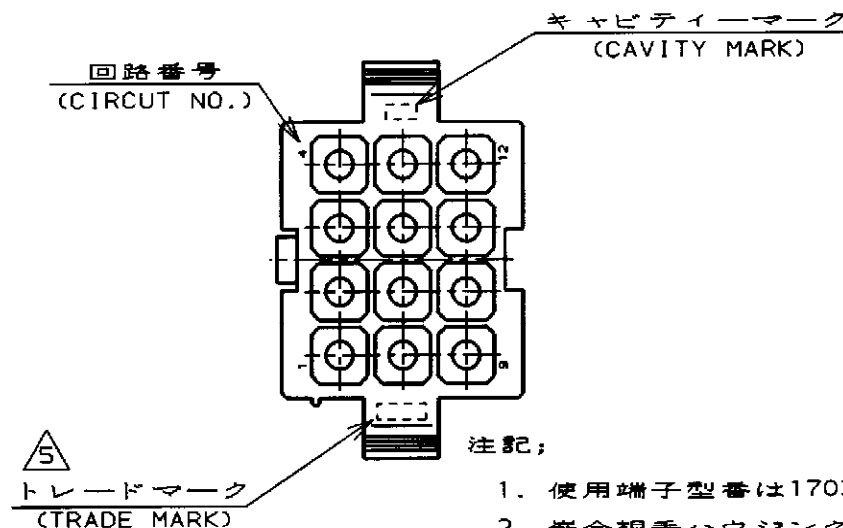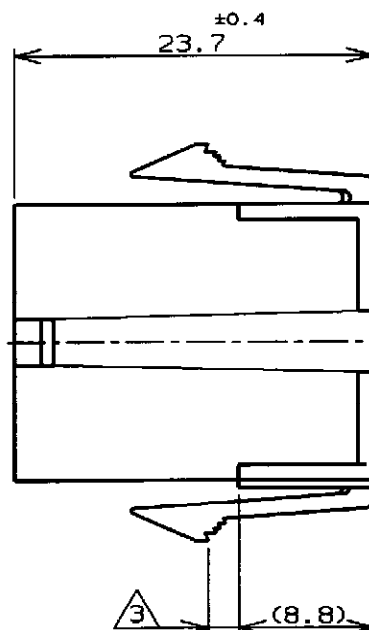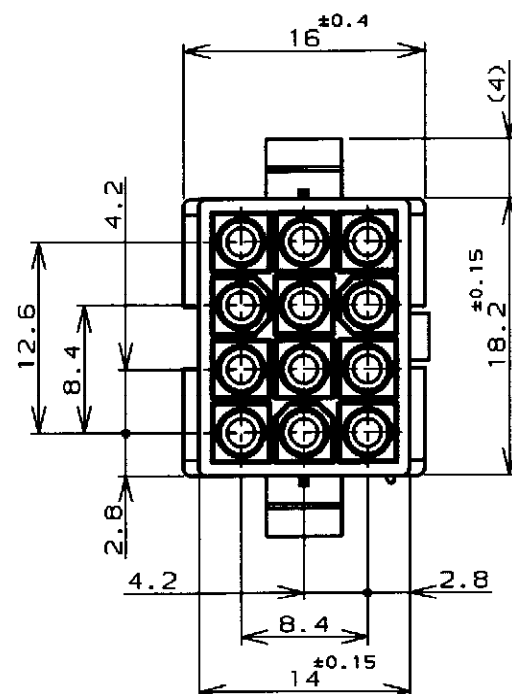


注記;

1. 使用端子型番は170359, 170360, 170361, 170362
2. 嵌合相手ハウジング型番は172170
3. 適用パネル厚 0.8~2.0mm
4. 取付穴打抜方向とハウジングの挿入方向は同じとする。
5. 表1参照

NOTE;

1. APPLICABLE CONT P/N: 170359, 170360, 170361, 170362
2. MATING HSG P/N: 172170
3. APPLICABLE PANEL THICKNESS: 0.8~2.0mm
4. HOUSING INSERTION INTO THE PANEL CUT-OUT MUST BE DONE IN THE SAME DIRECTION WITH PUNCH KNOCKING.
5. SEE TABLE 1
6. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

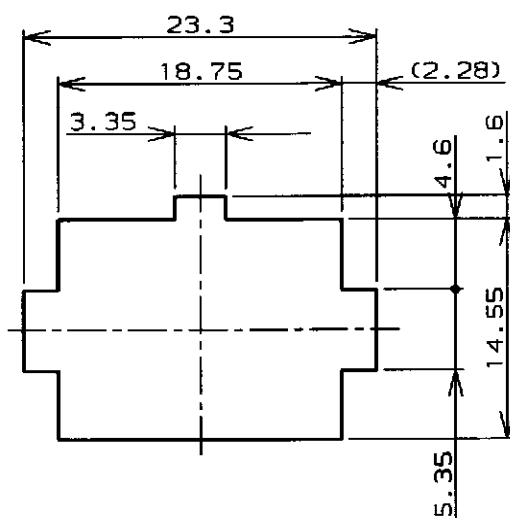

寸法公差は±0.20
(TOLERANCE: ±0.20)

パネル取付穴
(RECOMMENDED PANEL OPENING DIMENSION)

表 1 (TABLE 1)

トレードマーク (TRADE MARK)	生産場所 (MANUFACTURING PLACE)
-AMP OR AMP	日本 (JAPAN)
-+AMP OR AMP	中国 (CHINA(PCR))

OBSOLETE

黒 (BLACK)	1-172162-9
青 (BLUE)	1-6
緑 (GREEN)	1-5
赤 (RED)	1-2
自然色 (NATURAL)	172162-1
色 (COLOR)	型番 (P/N)
WIRE RANGE 圧合電線断面積	INSULATION DIA 被覆外径

DIMENSIONS 単位: ㎜		TOLERANCES UNLESS OTHERWISE SPECIFIED 一般公差 (GENERAL TOLERANCE)		DWN M. Yamashita 8 Jun '98 CHK M. Slin 15 Jun '98 APVD M. Slin 15 Jun '98		NAME 12極ミニユニバーサルメイトンロックキャップハウジング (UL94V-0)	
		±0.3		PRODUCT SPEC 製品規格 108-5138		12Pos MINI UNIVERSAL MATE-N-LOCK CONN. CAP HOUSING (UL94V-0)	
MATERIAL 材料 66ナイロン UL94V-0 (66NYLON UL94V-0)		FINISH 仕上		INSTRUCTION SHEET 取扱い説明書 IS-105J		SIZE CAGE CODE DRAWING NO A3 00779 C=172162	
CUSTOMER DRAWING				SCALE 尺度 2-1		SHEET 1 OF 1 REV C3	

参考図面

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-172162-2](#)