


Model 4011 Minigrabber® With 6-32 Threaded Insert

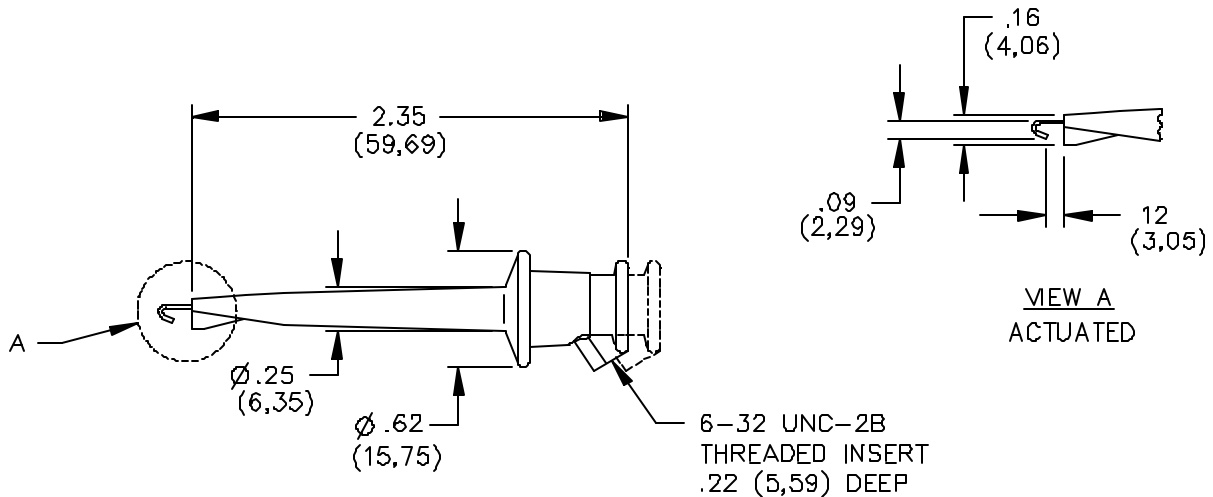

FEATURES:

- This grabber test clip can be used with oscilloscope leads equipped with a 6-32 screw.
- Use with Model #4311 to make custom cables.

MATERIALS:

Minigrabber:

Contact: Beryllium Copper, Alloy 165 per QQ-C-533.

Spring: Stainless steel, CRES 302, passivated.

Threaded Insert: Brass per QQ-B-626,

Alloy 360, ½ Hard.

Finish:

Contact: Gold plated per MIL-G-45204, Type

1, Class 00

Insulation:

Glass filled Nylon

Color: See ordering instructions.

Marking: "MINIGRABBER®" "POMONA"

RATINGS:

Operating Temperature: +102°C. (+216°F.) Max.

Operating Voltage: 30VAC/60VDC

Current: 5 Amperes

ORDERING INFORMATION: Model 4011-*

*=Color, -0 Black, -2 Red

Ordering Example: 4011-2 Adapter Color is Red

Additional colors are available upon request.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ± .005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pomona:

[4011-2](#) [4011-0](#)