


	NDTE.								
	1. GENERAL TOLERANCE	E IS ±	0.3, ±3°						
	A CONDITION OF DELI	very : 1	DBL PLATE IN	N OPEN POSI	TION				
	3. APPLIED RECEPTACL								
61.5 REF		PART	No, W	IRE SIZE (mi	m2)				
53 ^{REF}	MCP 1.5mm	0-12413 0-12413 0-1534	374-1	0.2 ~ 0.35 0.5 ~ 1.0 1.5					
	MCP-E 2.8mm	0-1743 0-1743	162-1	0.3 ~ 0.85 1.25 ~ 2.0					
	4. APPLICABLE COVER	PART N	o.: 1743258						
	5. APPLICABLE MATING	CAP PA	ART No. : 1743	3251		B		REMARK	В
Image: Constraint of the sector of the se									
	/\					⊲	U	REV	
						55-2	255-2	P/N	
						1-1743255-	0-1743255-	ASS'Y	
		(4)	M6 BOLT	_	SWCH10A	1	-		
)				-		-	1		
·		(3)	STOP RING DBL HSG	- NATURAL	SUS 304 PBT	1	1		
			PLUG HSG	BLACK	PBT	1	1		
		ND	NMAE	COLOR	MATERIAL	Q'1	ΓY		
Снк	J CHOI		=7	E T	E Connectiv	ity			А
MM 0 PLC ± 1 PLC ± 2 PLC ±	MMM OFFICE APVD MM 0 PLC HG 0 PLC PREDUCT 1 PLC PREDUCT 3 PLC H								
ANGLES ± MATERIAL FINISH WEIGH		\sum_{0077}		43255					
CUS	TOMER DRAWING	_ 007,		SCALE 2:1	SHEET 1	of 1	REV	D	

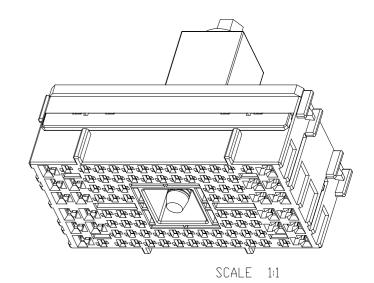

С

		REVISIONS			
	LTR	DESCRIPTION	DATE	DWN	APVD
_					
	A	RELEASED	08.DEC.'05	I YH	JK
_					
	В	REVISED (ECR-06-030138)	26.DEC.'06	YH	JK
_					
	C	REVISED (ECR-09-025518)	20.NDV./09	YH	HG
_					
	D	REVISED (ECR-15-000276)	24.JUL.'15	LS	HG

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity: 1743255-2