

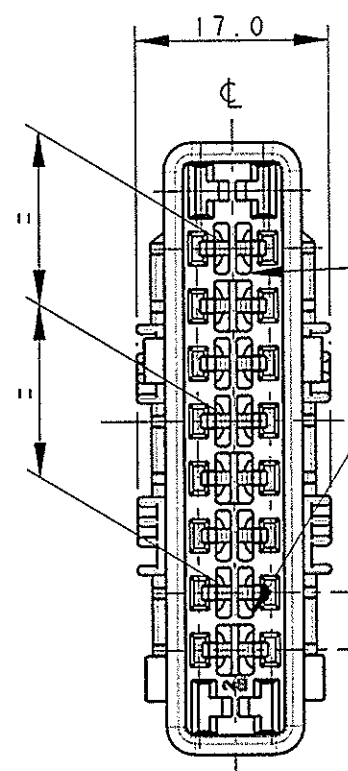
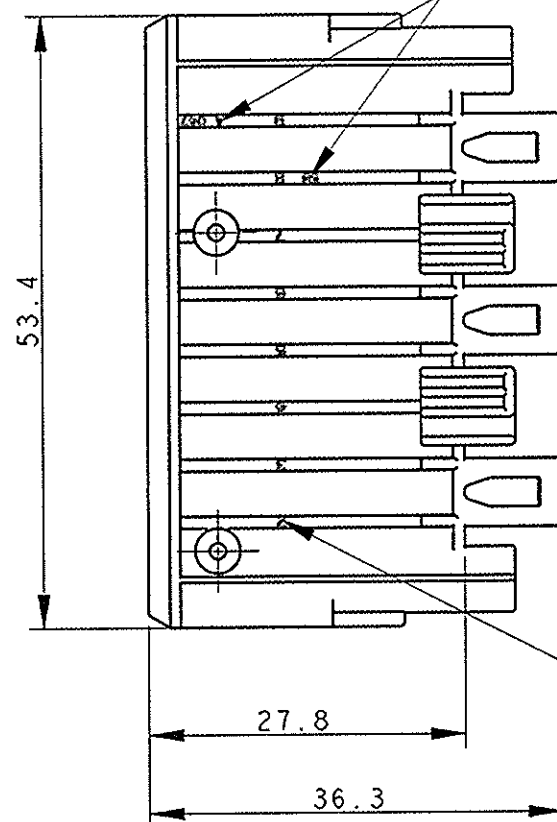
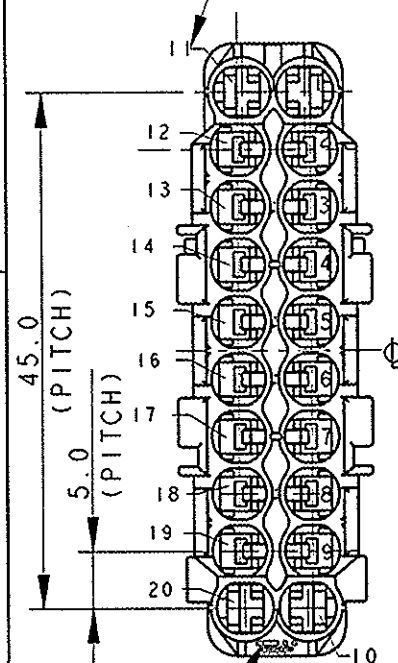
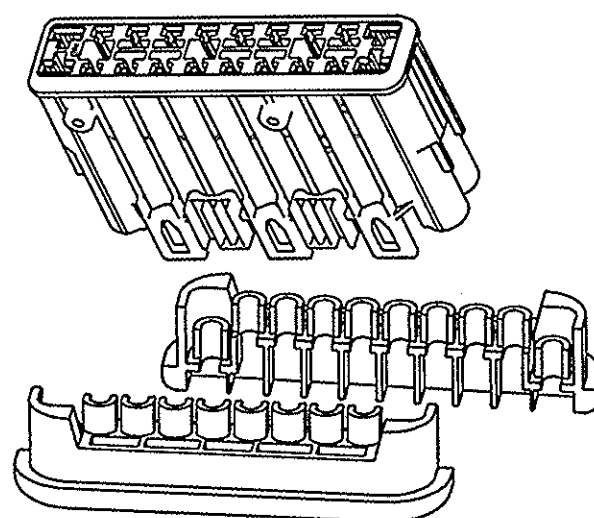
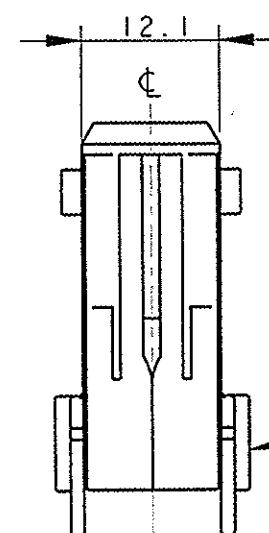
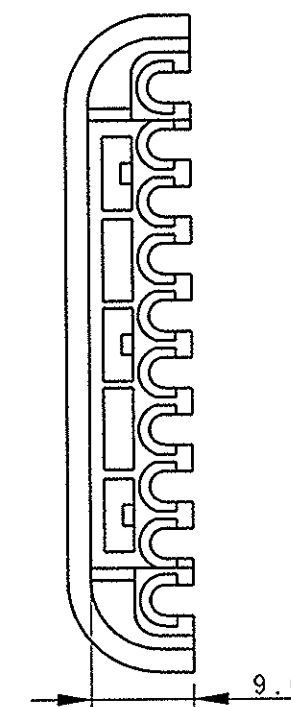


NUMERAZIONE INDICATIVA, POSIZIONE CONDUTTORI
(INDICATIVE CIRCUIT NUMBER)

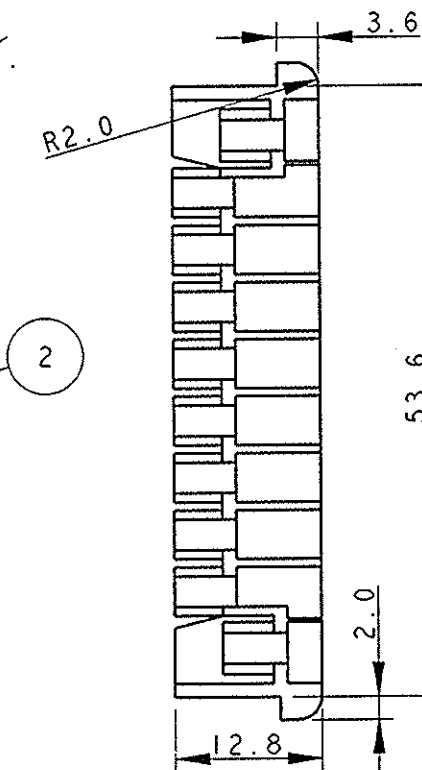

CHIAVI DI POLARIZZAZIONE VEDERE TABELLA
(POLARIZATIONS KEYS SEE DWG.)

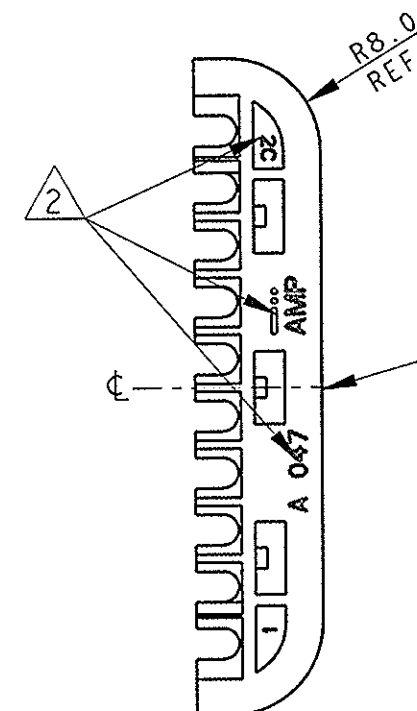

POLARITY POS	COMPONENTE (COMPONENT)	Q.TY	ITEM	COLORE (COLOUR)	MATERIALE (MATERIAL)	REV.	NUMERO PART NUMBER
	SECONDARY LOCK	2	2	BLACK	PBT 15% C.V.	F	282277-2
2-12 8-18	PLUG HSG.	1	1	BLACK	PA 66-30% C.V.	G	282273-4
2-12 8-18	PLUG HSG.	1	1	GREEN	PA 66-30% C.V.	G	282273-3 ³
2-12 8-18	PLUG HSG.	1	1	BLUE	PA 66-30% C.V.	G	282273-2
3-13 9-19	PLUG HSG.	1	1	GREY	PA 66-30% C.V.	G	282273-1


1) LE POSIZIONI 1, 10, 11 E 20 SONO ATTRIBUITE AI CONTATTI DI POTENZA P/N 929937-1. LE RESTANTI SONO ATTRIBUITE AI CONTATTI DI SEGNALE P/N 282224-1 E 282225-1.
(POSITIONS 1, 10, 11 ARE SUITABLE FOR CONTACT P/N 929937-1 ALL OTHER CAVITIES ARE SUITABLE FOR CONTACTS P/NS 282224-1 AND 282225-1)

² MARCHI DI FABBRICA, CODICE FORNITORE E DATARIO
(TRADE MARKS, SUPPLIER AND DATE CODE AS SHOWN).

³ P/N 282273-3 superato da 282273-4
(P/N 282273-3 SUPERSEDED BY 282273-1)

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION
IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION
SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS:
mm



MATERIAL SEE TABLE

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ±0.3
1 PLC ±0.3
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±1°

FINISH -

DWN M. PALMANO 30MAY2006

CHK O. CANUTO 6JUN2005

APVD A. GENTA 6JUN2005

PRODUCT SPEC

108-20117

APPLICATION SPEC

WEIGHT -

CUSTOMER DRAWING

tyco
Electronics

tyco Electronics AMP Italia
C.so F.lli Cervi 15, Collegno (TO)

20 POS. SEALED SECTIONING PLUG
CONNECTOR KIT

SIZE A3 CAGE CODE - DRAWING NO C=282273 RESTRICTED TO -

SCALE 3:2 SHEET 1 OF 1 REV G

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[282273-1](#)