

"High Frequency Ceramic Solutions"

967 MHz Directional Coupler

P/N 0967CP14A024

Detail Specification: 06/15/04

Page 1 of 2


General Specifications

Part Number	0967CP14A024
Frequency (MHz)	955 ~ 979
Insertion Loss @ BW	0.5 dB max.
Return Loss (dB)	15.6 min.
Coupling (dB)	12.5±1.0
Isolation (dB)	19.0 min

Power Capacity	3.0 Watts max.
Impedance	50 Ω
Operating Temperature	-40 to +85°C
Reel Quantity	4,000

Mechanical Dimensions

	In	mm
L	0.063 ± 0.004	1.60 ± 0.10
W	0.031 ± 0.004	0.80 ± 0.10
T	0.024 ± 0.004	0.60 ± 0.10
a	0.008 ± 0.004	0.20 ± 0.10
b	0.008 +.004/-0.006	0.20 +0.1/-0.15
c	0.006 ± 0.004	0.15 ± 0.10
g	0.012 ± 0.004	0.30 ± 0.10
p	0.020 ± 0.002	0.50 ± 0.05

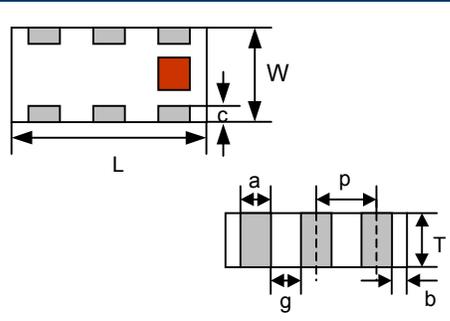

Terminal Configuration

No.	Function
1	IN
2	GND
3	Coupled OUT
4	Termination
5	GND
6	Main OUT


The diagram shows the physical layout of the six terminals, with 1, 2, 3, and 4 on the top edge and 4, 5, 6 on the bottom edge. A red square is located between terminals 2 and 5.

Mounting Considerations

Mount these devices with brown mark facing up.

Line width should provide 50Ω impedance matching characteristics.

Units: mm

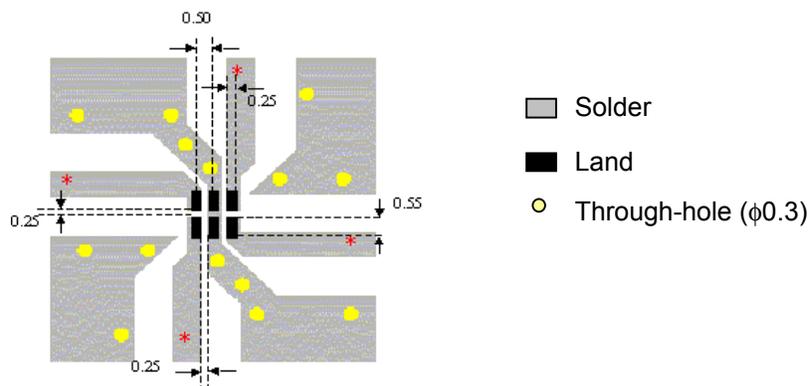

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.

"High Frequency Ceramic Solutions"


967 MHz Directional Coupler

P/N 0967CP14A024

Detail Specification: 06/15/04

Page 2 of 2

Typical Electrical Characteristics (T=25°C)

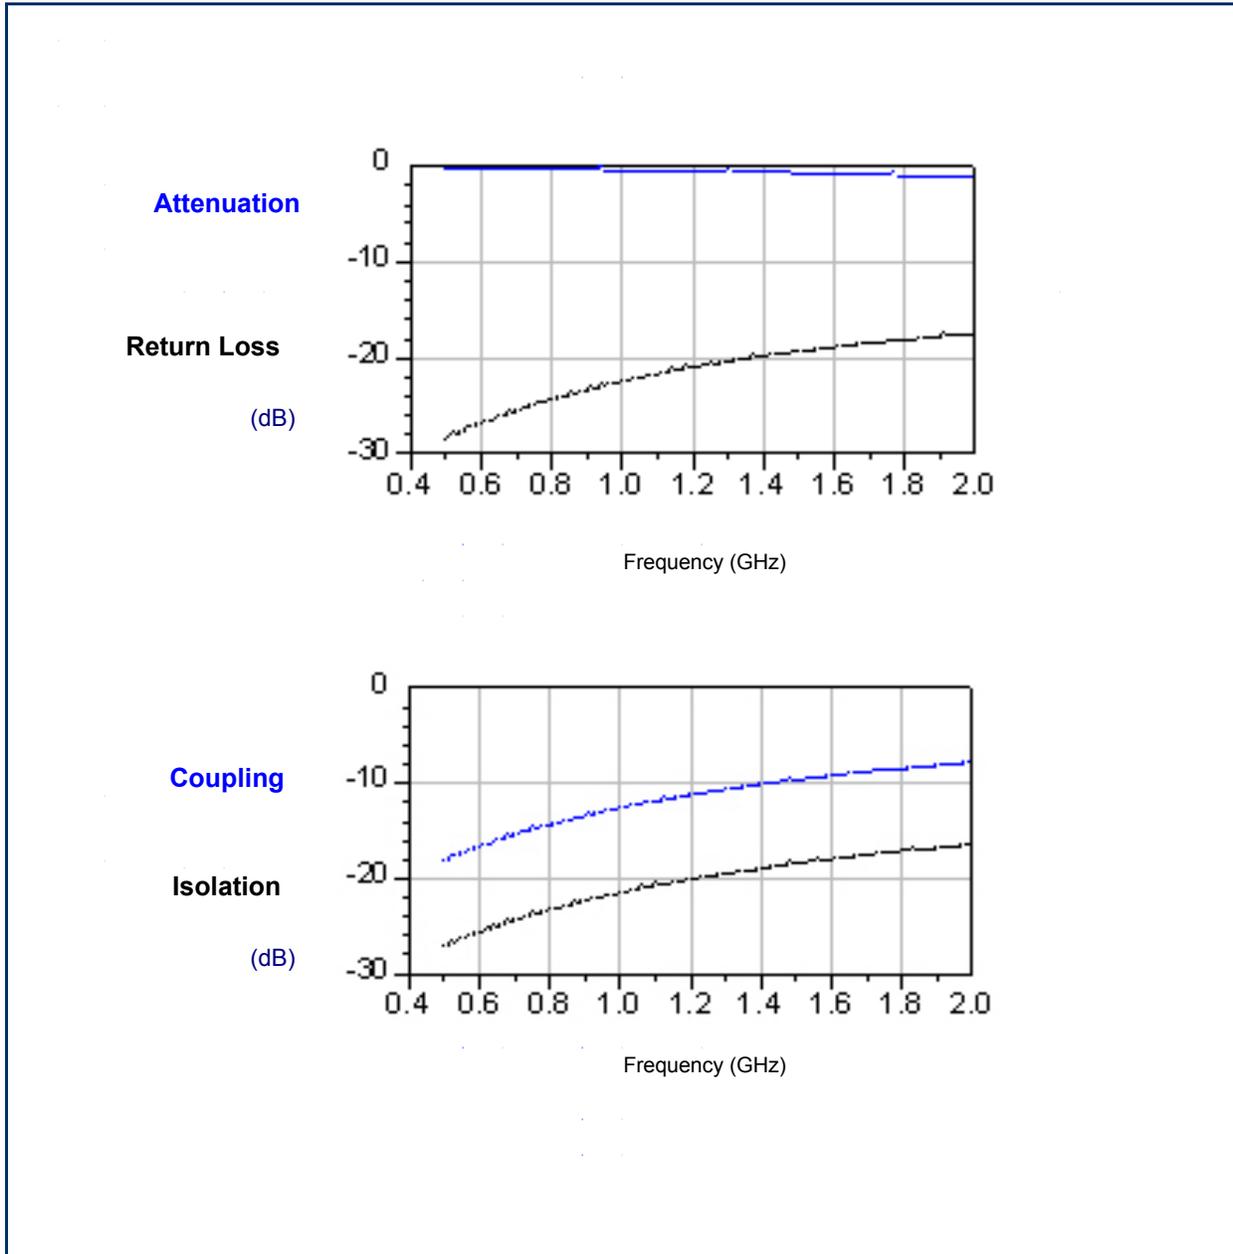

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Johanson:](#)

[0967CP14A024T](#)