
PART NUMBER REV. SSB-LX2350IW REV. E.C.N. NUMBER AND REVISION COMMENTS DATE A E.C.N. #10BRDR. & REDRAWN. 6.21.01


09.01.16

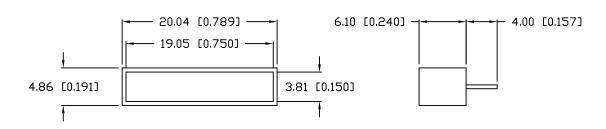


ELECTRO-OPTICAL CHARACTERISTICS TA=25°C

ECN-Lumex201600058

MIN	TYP	MAX	UNITS	TEST COND
	630		nm	
	2.0	2.0	V_{f}	
		5.0	V_r	Ir=100µA
	45		mcd	$I_f = 20MA$
RED				
MILKY WI	TH DIFFUSED			
	RED	630 2.0 45	630 2.0 2.0 5.0 45	630 nm 2.0 2.0 Vf 5.0 Vr 45 mcd

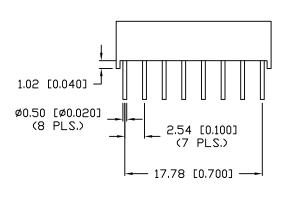



LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	MAX	UNITS	
FORWARD CURRENT	20	mA	
OPERATING, STORAGE TEMP.	-40 TO +85	•C	
SOLDERING TEMP.**	MAX. 3SEC.@260	•c	

**2mm BELOW PACKAGE BASE

Ĺĸ	٦Ţ	Ĺ	٦Ţ	Ĺ	٦Ţ	Ĺ	٦Ţ
1	2	3	4	5	6	7	8

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION MAX.= +0.00 (±0.000). MIN= +DECIMAL PRECISION MAX.= +0.00 (±0.000).

PART NUMBER

B SSB-LX2350IW

5mm x 20mm 4 CHIP LIGHT BAR, 630nm HIGH INTENSITY RED CHIPS, MILKY WHITE DIFFUSED. CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



425 N. GARY AVE CAROL STREAM,IL 60188 PHONE: 800–278–5666 FAX: 630–315–2152

FAX: 630-315-2152 WEB: WWW.LUMEX.COM

DRAWN BY: CHECKED BY: APPROVED BY: DATE: 09.01.16
PAGE: 1 OF 1
K.Y. G.Y. R.C. SCALE: N/A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

<u>Lumex</u>:

SSB-LX2350IW