


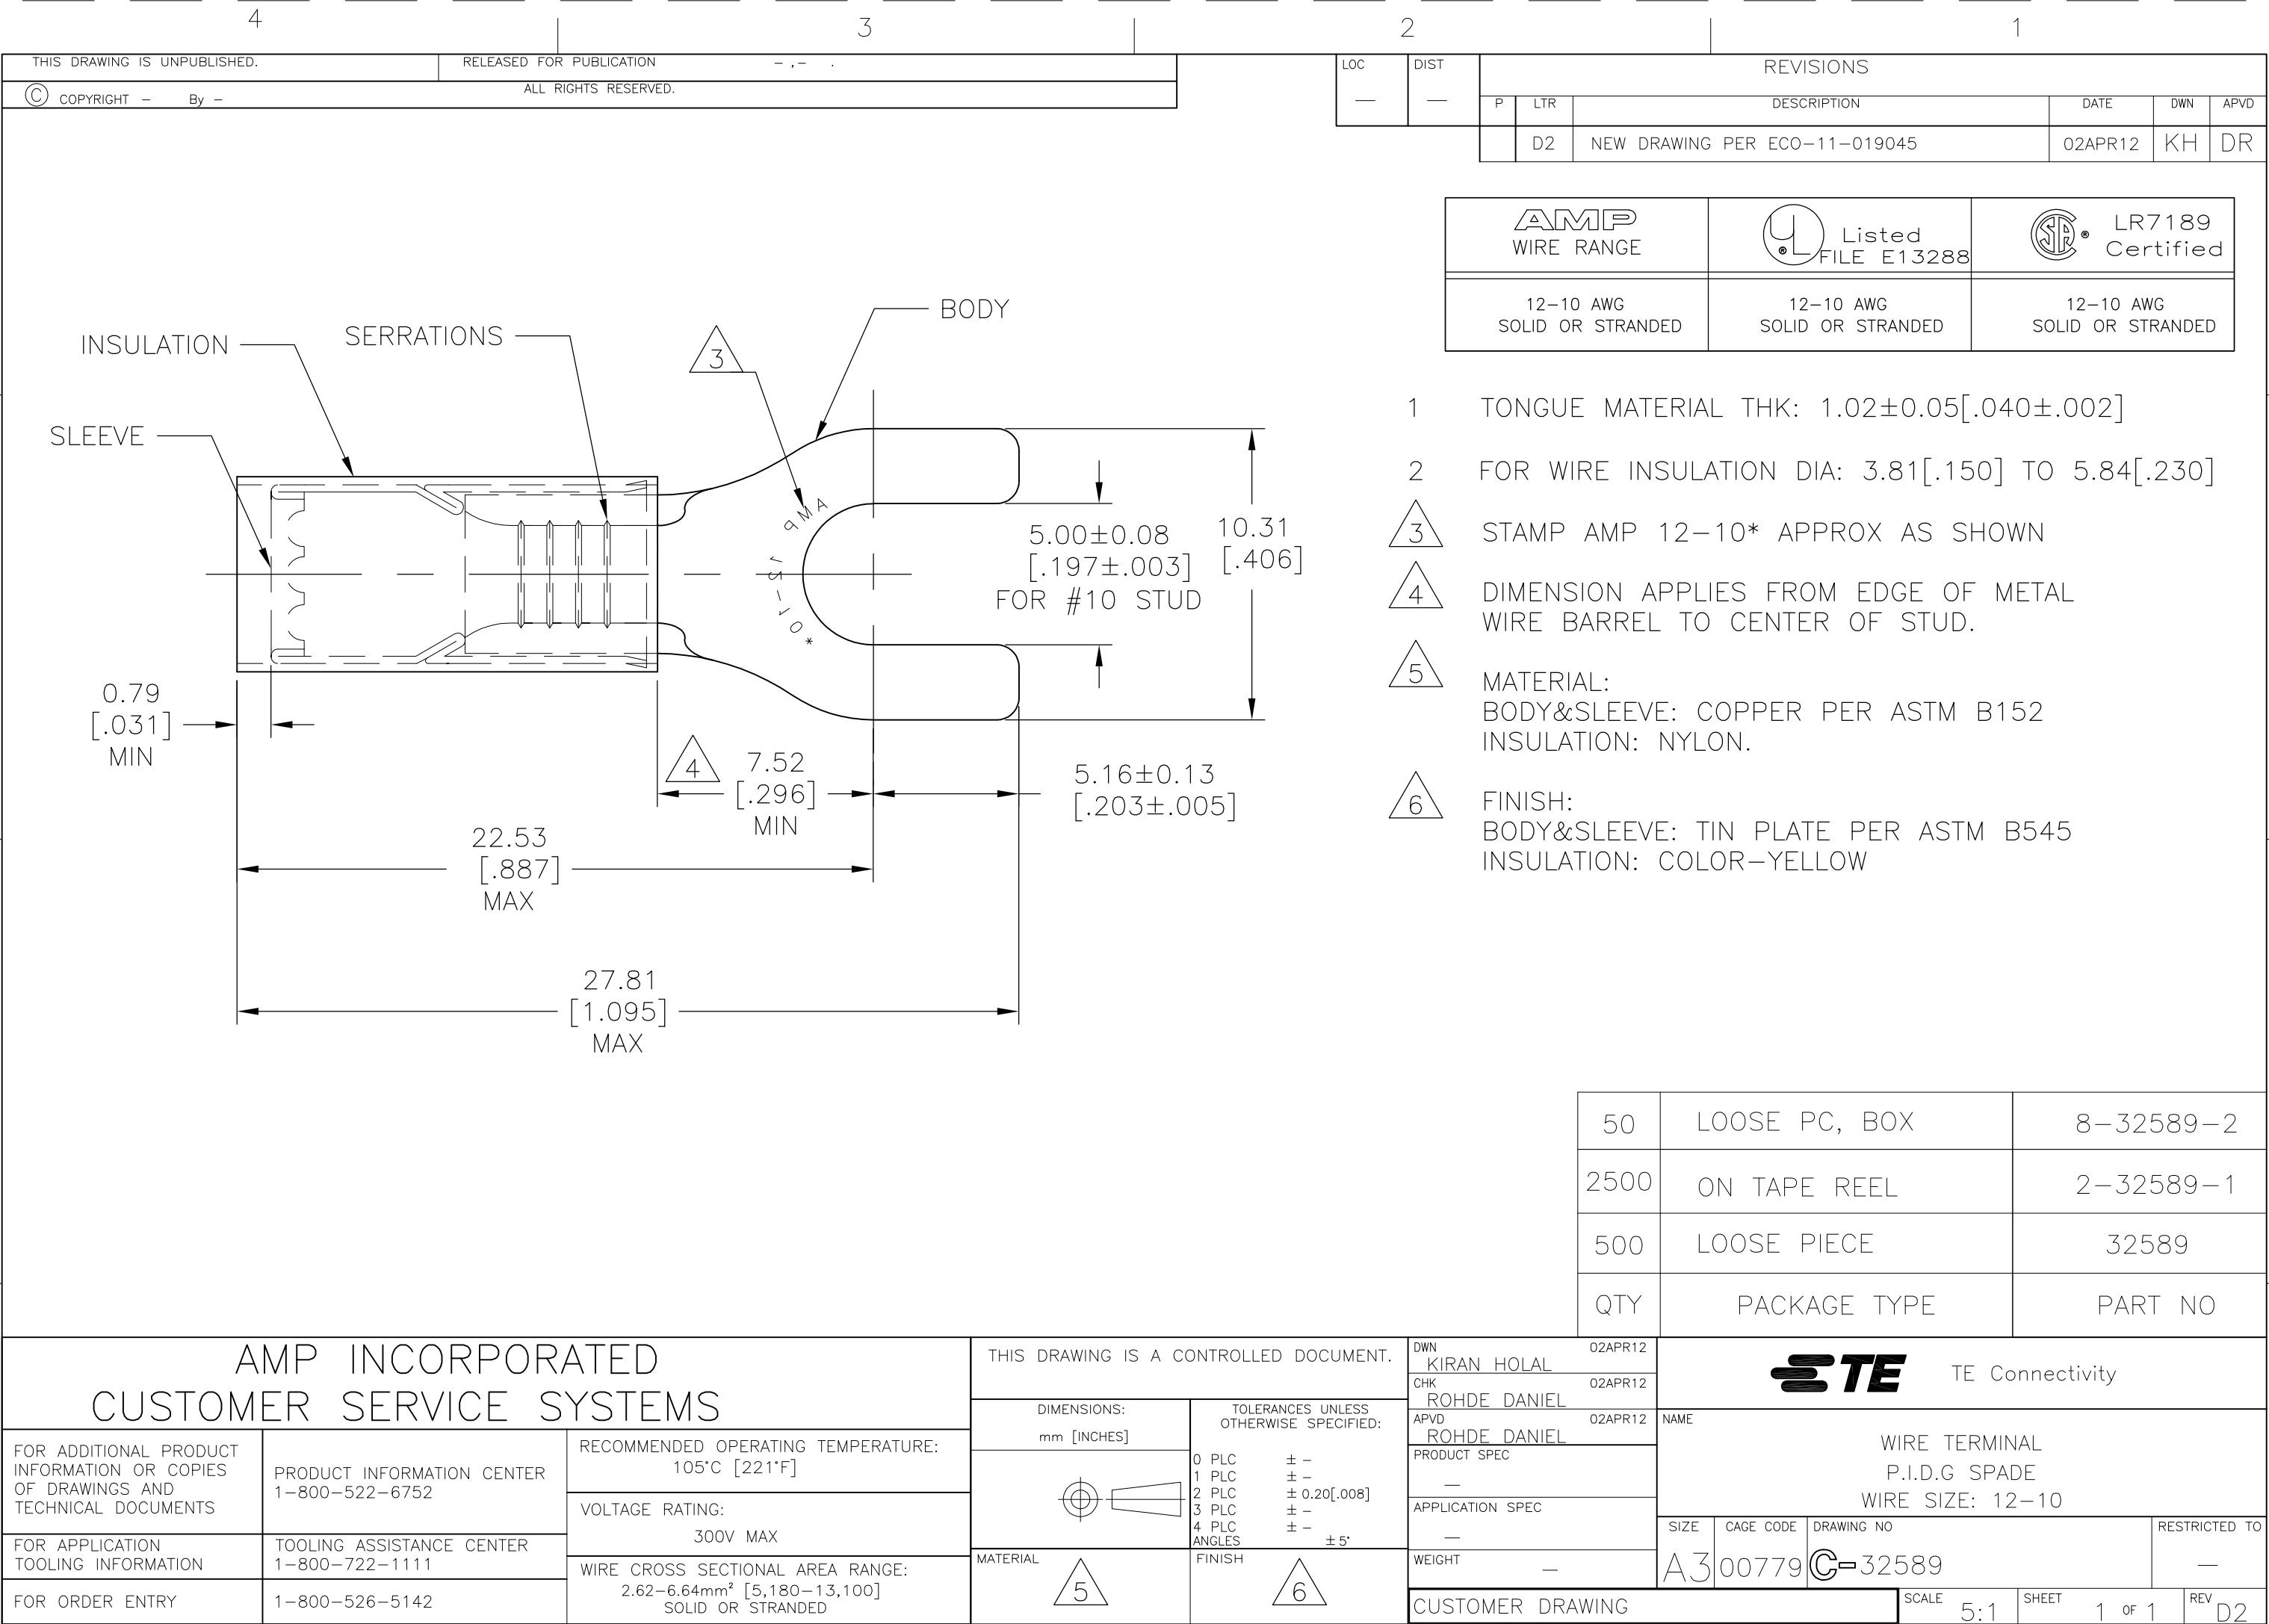

INSULATION

SERRATIONS

SLEEVE

BODY

3

9 MA

15-10*

5.00±0.08
[.197±.003]
FOR #10 STUD

10.31
[.406]

0.79
[.031]
MIN

22.53
[.887]
MAX

27.81
[1.095]
MAX

7.52
[.296]
MIN

5.16±0.13
[.203±.005]

4

50	LOOSE PC, BOX	8-32589-2
2500	ON TAPE REEL	2-32589-1
500	LOOSE PIECE	32589
QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED

CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS

PRODUCT INFORMATION CENTER
1-800-522-6752

FOR APPLICATION TOOLING INFORMATION

TOOLING ASSISTANCE CENTER
1-800-722-1111

FOR ORDER ENTRY

1-800-526-5142

RECOMMENDED OPERATING TEMPERATURE:
105°C [221°F]

VOLTAGE RATING:
300V MAX

WIRE CROSS SECTIONAL AREA RANGE:
2.62-6.64mm² [5,180-13,100]
SOLID OR STRANDED

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± 0.20[.008]
3 PLC ± -
4 PLC ± -
ANGLES ± 5°
FINISH

MATERIAL

5

6

DWN
KIRAN HOLAL
02APR12

CHK
ROHDE DANIEL
02APR12

APVD
ROHDE DANIEL
02APR12

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

—

TE Connectivity

WIRE TERMINAL
P.I.D.G SPADE
WIRE SIZE: 12-10

SIZE
A3

CAGE CODE
00779

DRAWING NO
C-32589

RESTRICTED TO

—

CUSTOMER DRAWING

SCALE
5:1

SHEET
1 OF 1

REV
D2

1470-19 (3/11)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[32589](#)