

Rectifier Diode Avalanche Diode


$$V_{RRM} = 1200-1800 \text{ V}$$

$$I_{F(RMS)} = 7 \text{ A}$$

$$I_{F(AV)M} = 3.6 \text{ A}$$

V_{RSM} V	$V_{(BR)min}$ ① V	V_{RRM} V	Standard Types	Avalanche Types
1300	1300	1200	DS 2-12A	DSA 2-12A
1700	1750	1600		DSA 2-16A
1900	1950	1800		DSA 2-18A

① Only for Avalanche Diodes

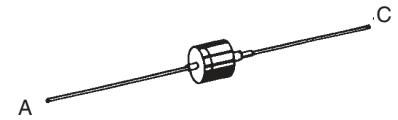

A = Anode C = Cathode

Symbol	Test Conditions	Maximum Ratings	
$I_{F(RMS)}$	$T_{VJ} = T_{VJM}$	7	A
$I_{F(AV)M}$	$T_{amb} = 45^{\circ}\text{C}; R_{thJA} = 30 \text{ K/W}; 180^{\circ} \text{ sine}$	3.6	A
	$T_{amb} = 45^{\circ}\text{C}; R_{thJA} = 115 \text{ K/W}; 180^{\circ} \text{ sine}$	1.2	A
P_{RSM}	DSA types, $T_{VJ} = 25^{\circ}\text{C}, t_p = 10 \mu\text{s}$	2.5	kW
I_{FSM}	$T_{VJ} = 45^{\circ}\text{C}; V_R = 0$	t = 10 ms (50 Hz), sine	120 A
		t = 8.3 ms (60 Hz), sine	127 A
I^2t	$T_{VJ} = 45^{\circ}\text{C}; V_R = 0$	t = 10 ms (50 Hz), sine	72 A ² s
		t = 8.3 ms (60 Hz), sine	68 A ² s
T_{VJM}	$T_{VJ} = T_{VJM}; V_R = 0$	t = 10 ms (50 Hz), sine	50 A ² s
		t = 8.3 ms (60 Hz), sine	47 A ² s
T_{VJ}		180	°C
T_{stg}		-40...+180	°C
T_{stg}		-40...+180	°C
Weight		2.4	g

Features

- International standard package
- Axial wire connexions
- Planar glassivated chips


Applications

- Low power rectifiers
- Field supply for DC motors
- Power supplies
- High voltage rectifiers

Advantages

- Space and weight savings
- Simple PCB mounting
- Improved temperature and power cycling
- Reduced protection circuits

Dimensions in mm (1 mm = 0.0394")





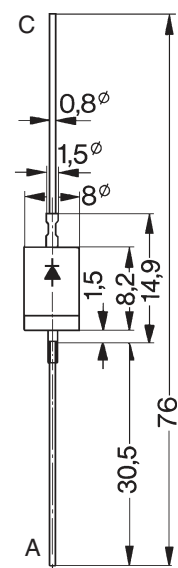


Symbol	Test Conditions	Characteristic Values	
I_R	$T_{VJ} = 180^{\circ}\text{C}; V_R = V_{RRM}$	≤	2 mA
V_F	$I_F = 7 \text{ A}; T_{VJ} = 25^{\circ}\text{C}$	≤	1.25 V
V_{T0}	For power-loss calculations only		0.85 V
r_T	$T_{VJ} = T_{VJM}$		43 mΩ
R_{thJA}	Forced air cooling with 1.5 m/s, $T_{amb} = 45^{\circ}\text{C}$		30 K/W
	Soldered between 2 cooling fins, $T_{amb} = 45^{\circ}\text{C}$		37 K/W
	Soldered onto PC board (25 mm), $T_{amb} = 45^{\circ}\text{C}$		75 K/W
	Free air cooling, $T_{amb} = 45^{\circ}\text{C}$		115 K/W
d_s	Creepage distance on surface		2.25 mm
d_A	Strike distance through air		2.25 mm
a	Max. allowable acceleration		100 m/s ²

Data according to IEC 60747

IXYS reserves the right to change limits, test conditions and dimensions

20170323a

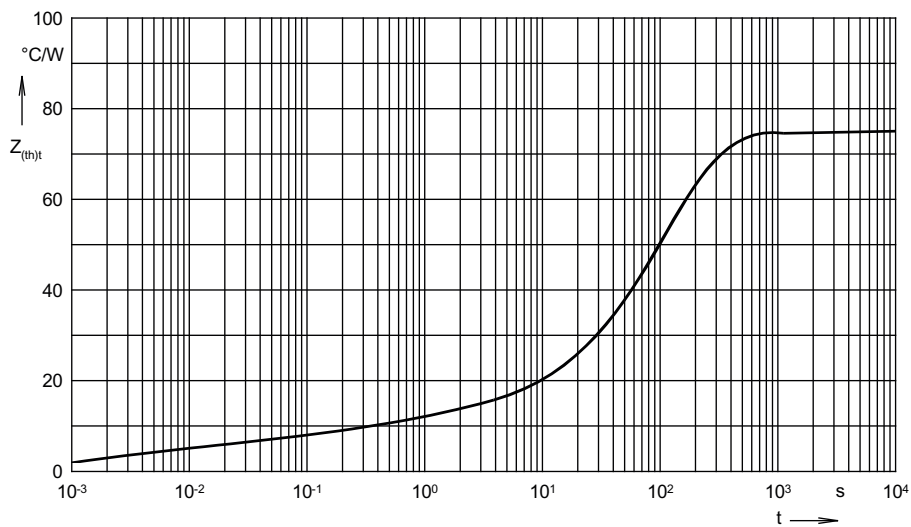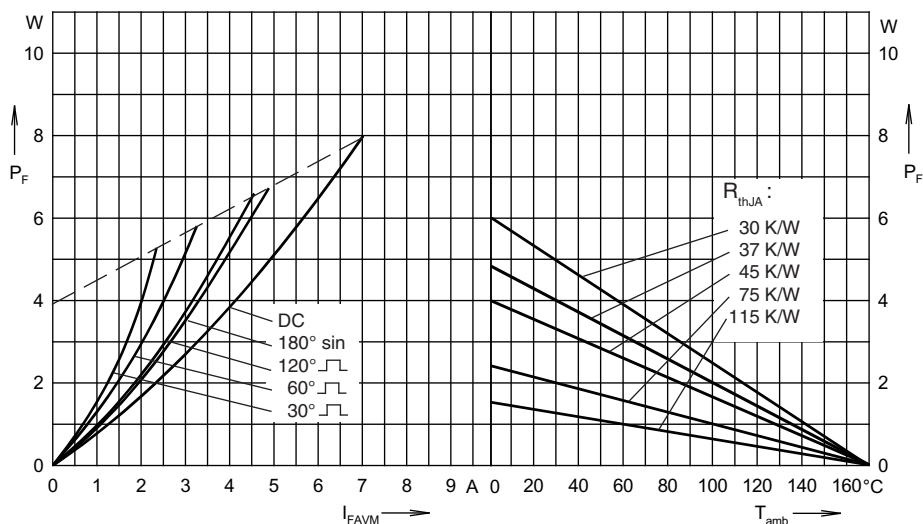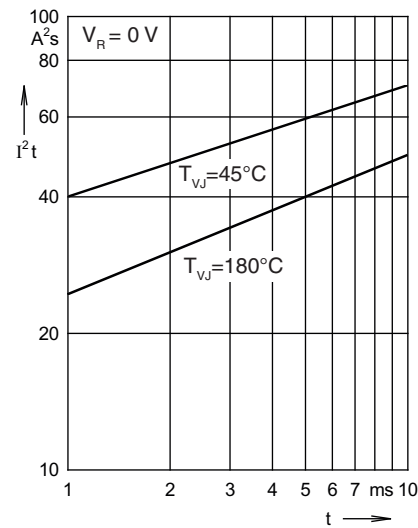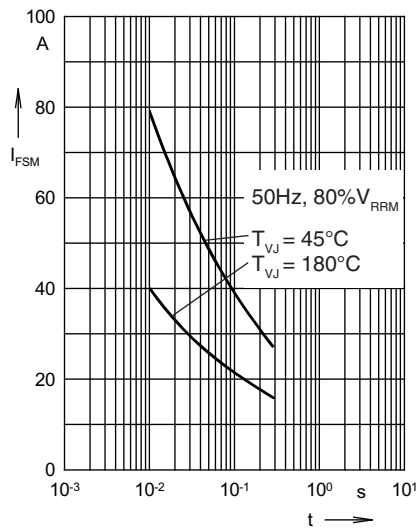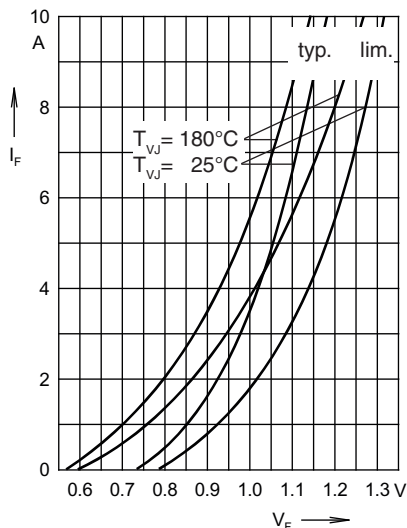

R_{thJA} for various conduction angles d :

d	R_{thJA} (K/W)
DC	75
180°	75.7
120°	76.1
60°	76.7
30°	77.4

Constants for Z_{thJA} calculation:

i	R_{thi} (K/W)	t_i (s)
1	0.15	0.001
2	10.85	0.1
3	64	35

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[IXYS:](#)

[DS2-08A](#) [DS2-12A](#) [DSA2-12A](#) [DSA2-16A](#) [DSA2-18A](#)