
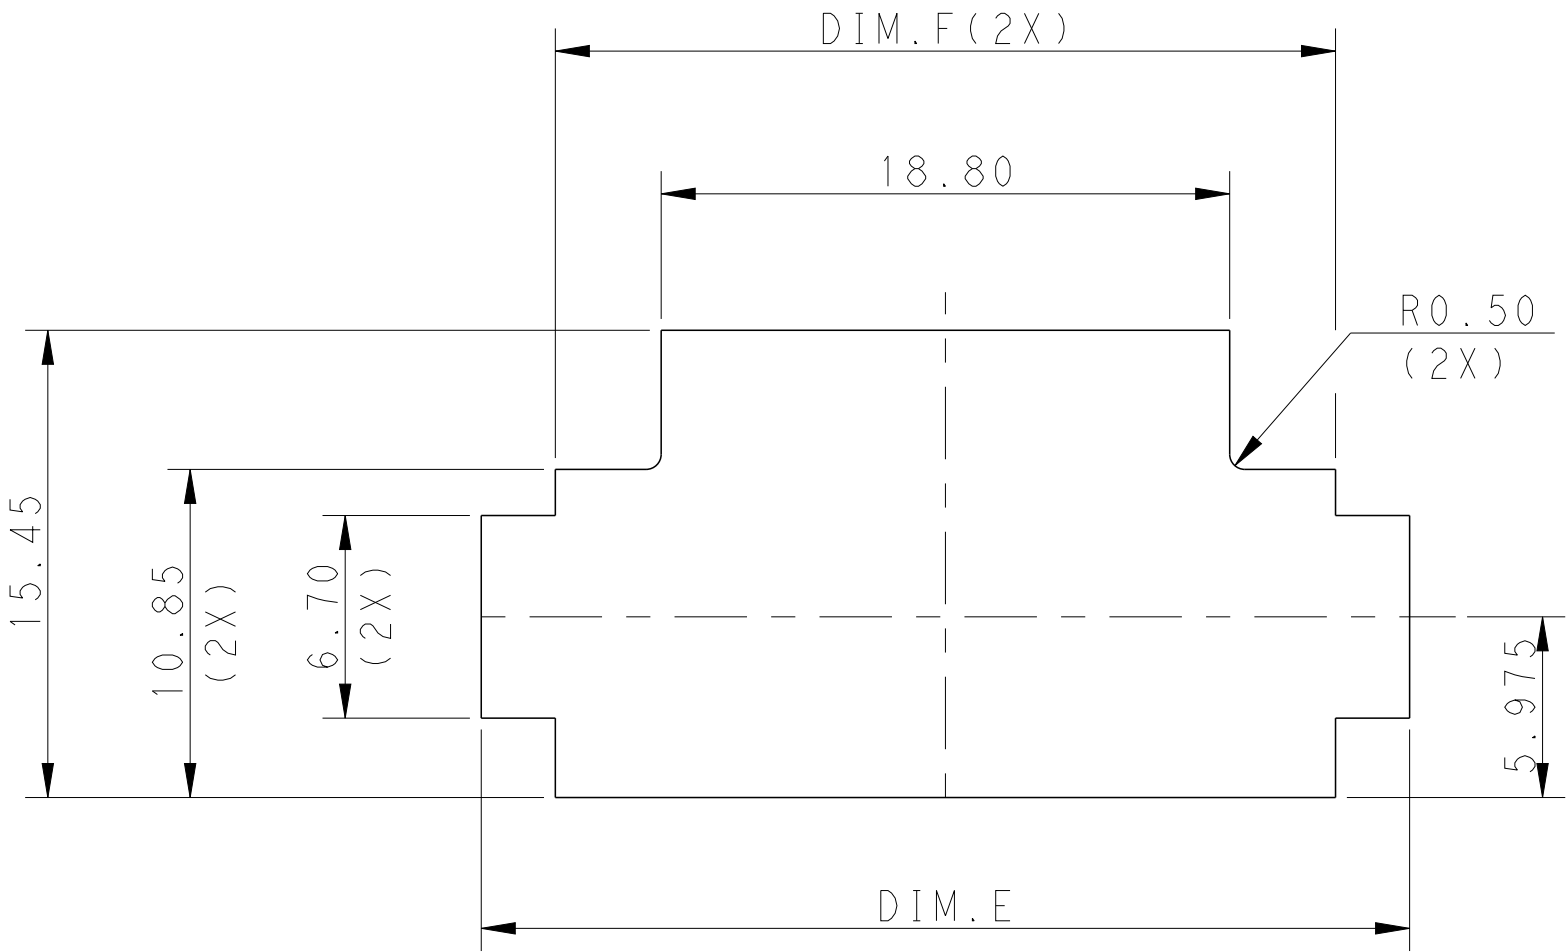


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	REVISED PER ECR-16-003314	18JUL2016	BW	GJ

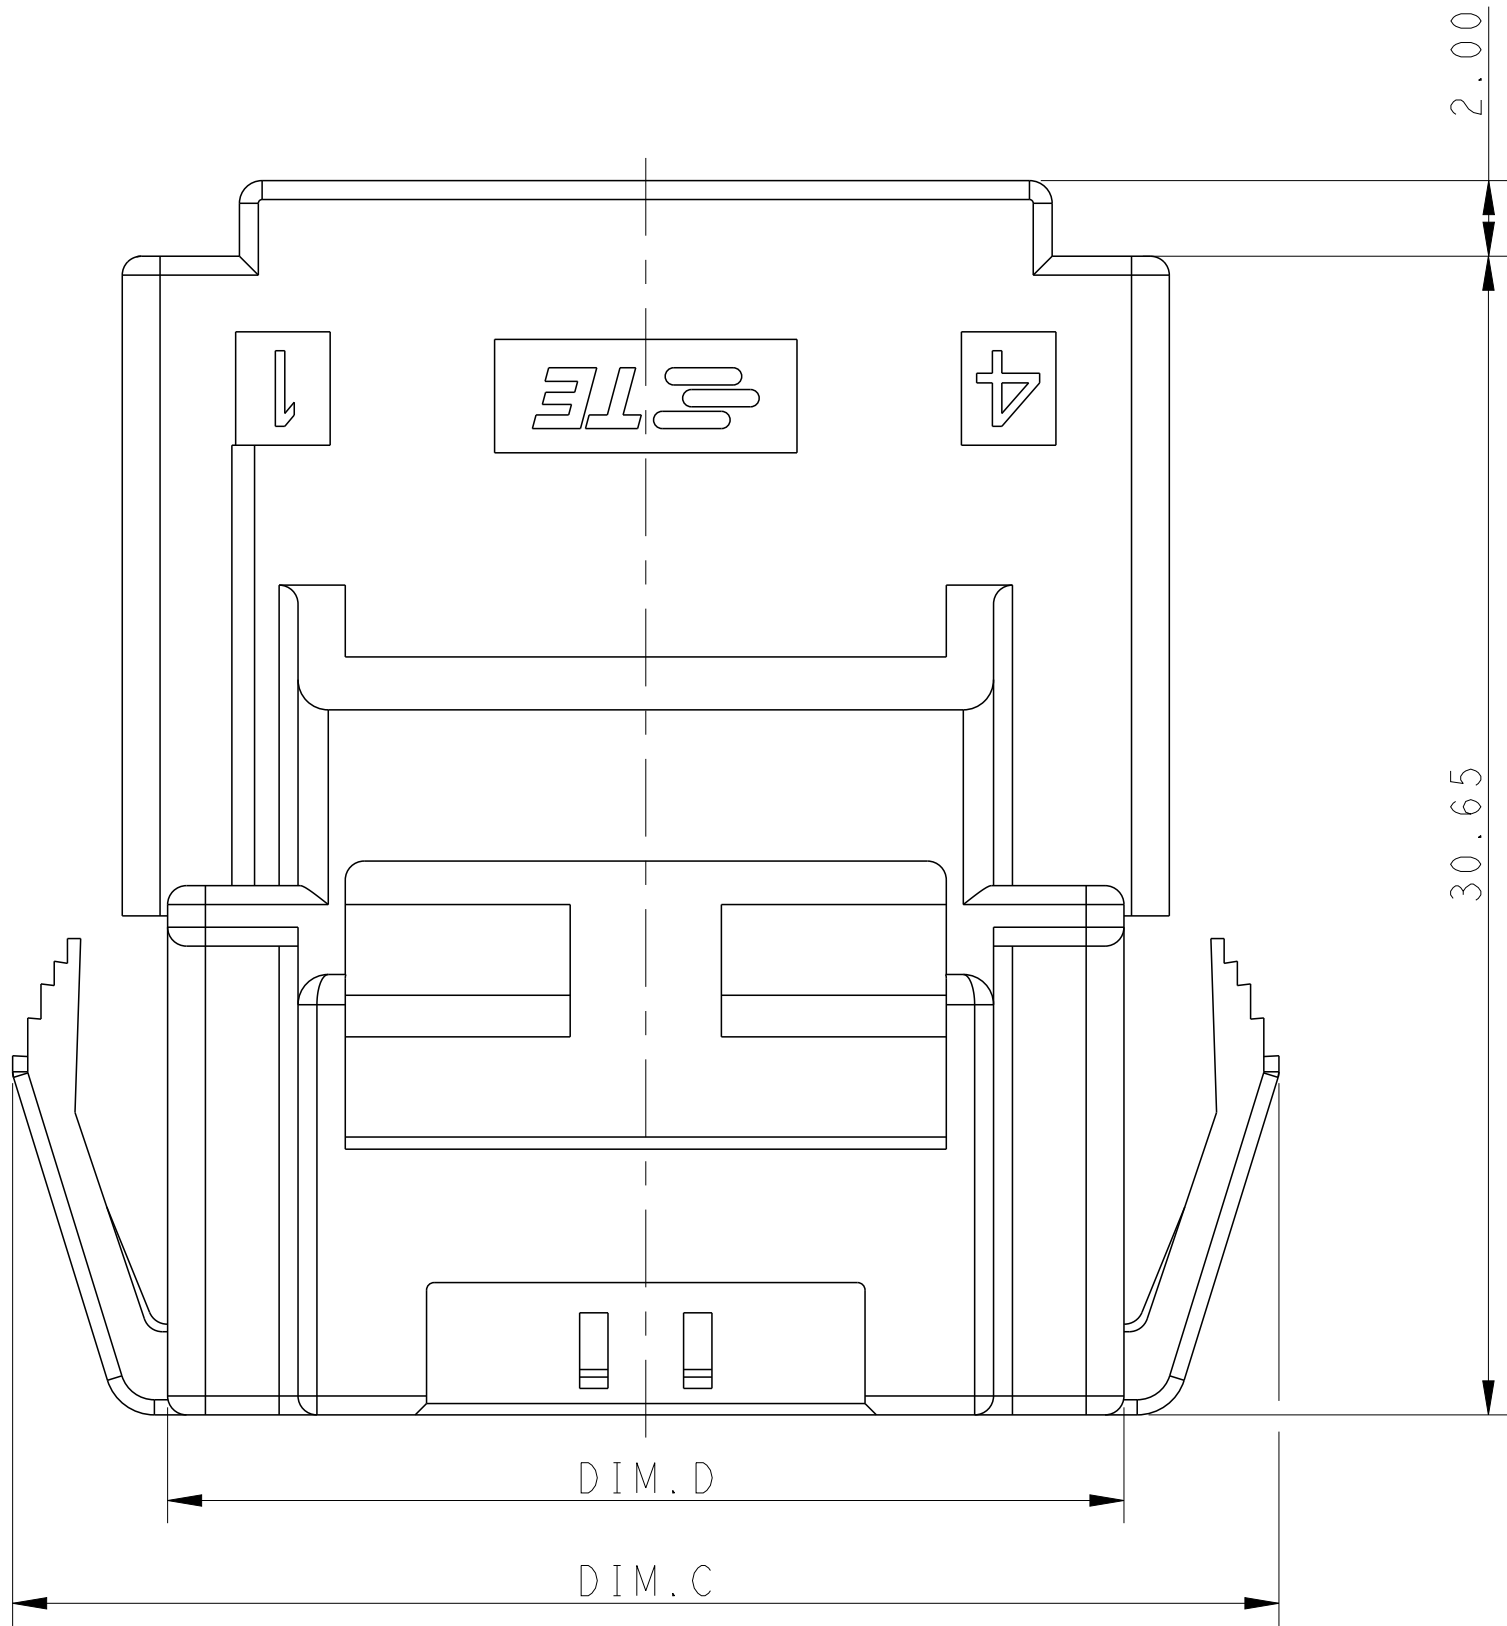

⚠ MATERIAL:
LEVEL A:PA6 GLASS FILLED, COMPLY WITH GLOW WIRE REQUIREMENTS FOR PARTS OF NON-METALLIC MATERIAL SUPPORTING A CURRENT-CARRYING CONNECTION DETAILED IN IEC 60335-1, SECTION 30 (GWT),UL 94V-0
LEVEL B:PBT GLASS FILLED, HOT WIRE IGNITION (HWI) VERSION ARE MOLDED IN A RESIN THAT COMPLIES WITH TE HOT WIRE IGNITION TEST 109-32026 AND ARE RECOMMENDED FOR USE WITH HWI HOUSINGS THAT ALSO COMPLY, UL 94V-0






⚠ MATERIAL MARK:
LEVEL A:GWT,LEVEL B:HWT

3 APPLICABLE CONTACT P/N
TAB CONTACT:1971238/1971780/1971782/1971784/1971786/1971788-*,2238067-*


4 MATING CONN, P/N
PLUG HSG: *-2232265-
TPA (LOCK PLATE): *-1971777-*

5 RECOMMENDED PANEL THICKNESS:1.0~2.0mm

RECOMMENDED PANEL OPENING DIMENSIONS
FOR CAP HOUSING 1*5 AND 1*4 POSITIONS
(TOLERANCE: ±0.15mm)

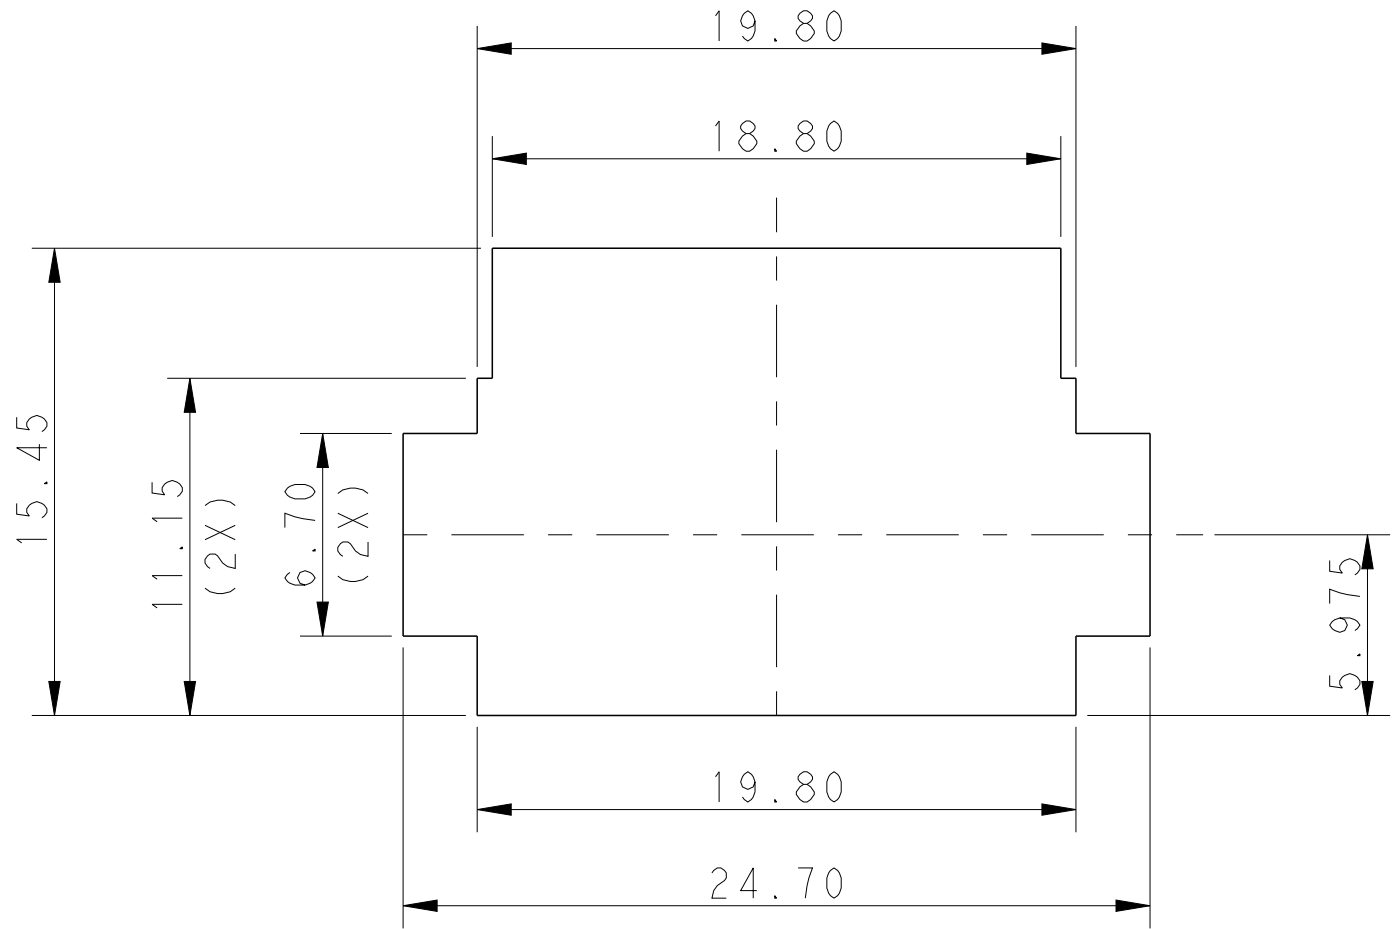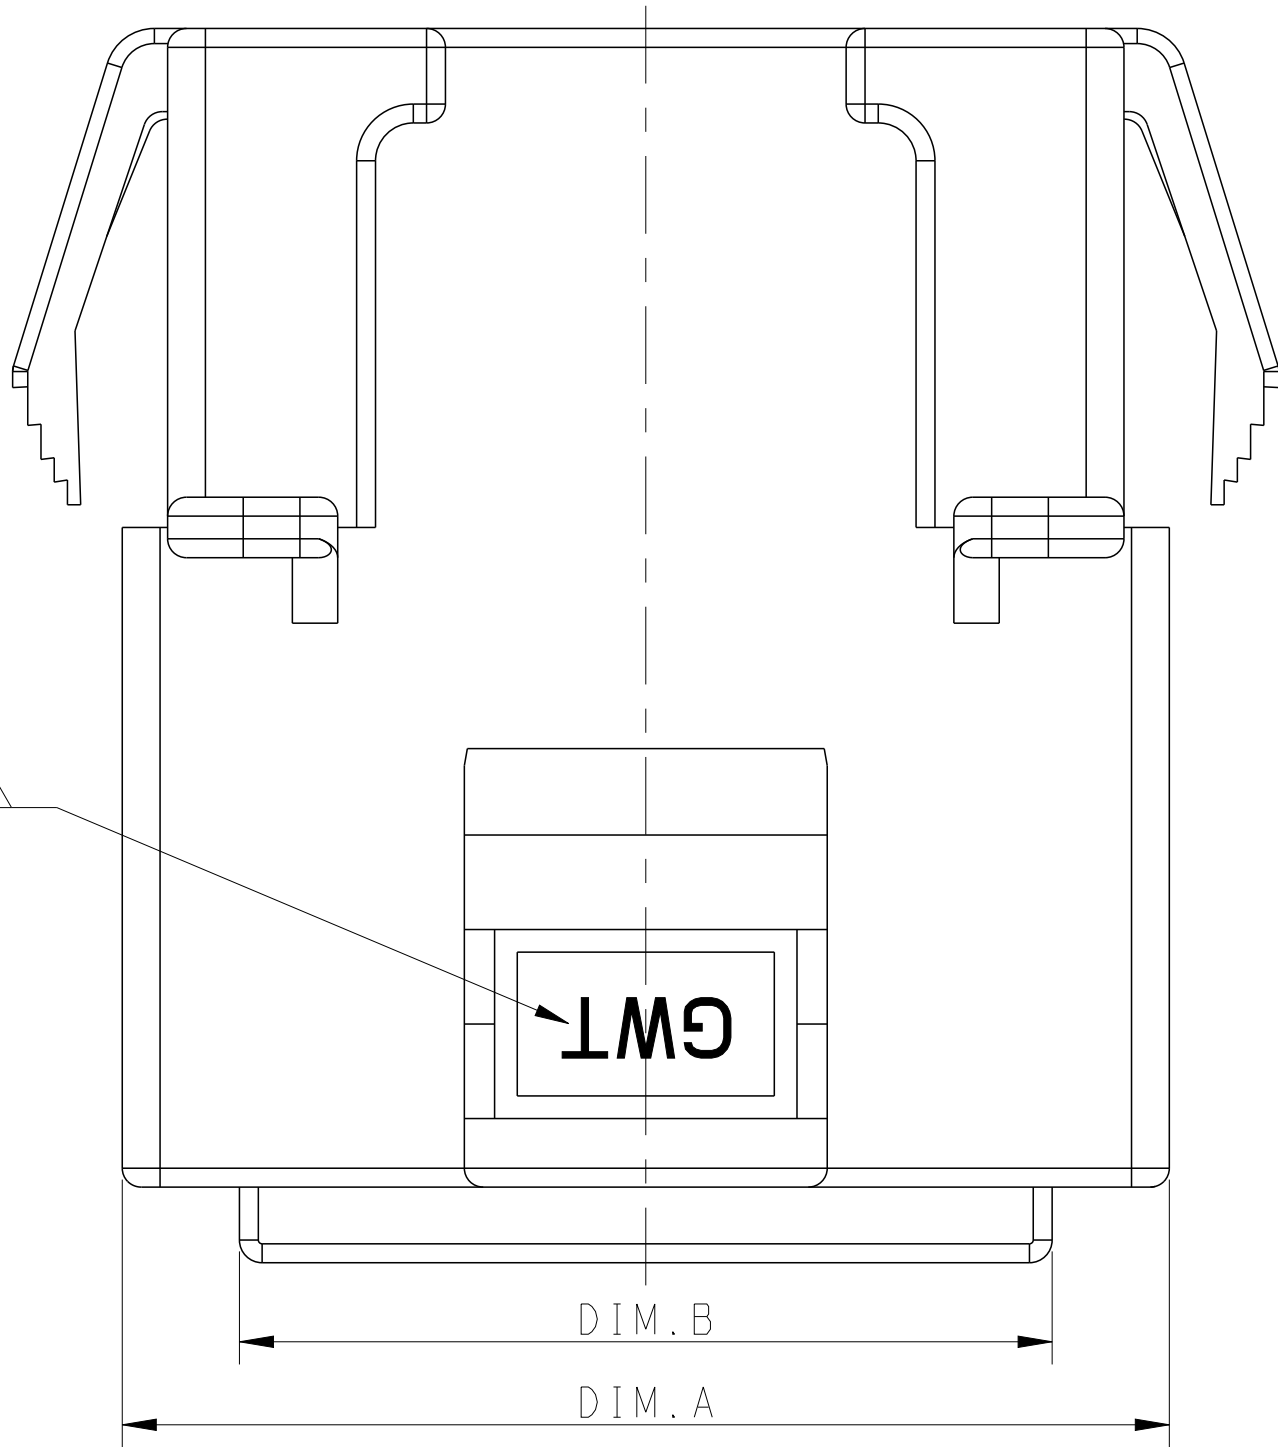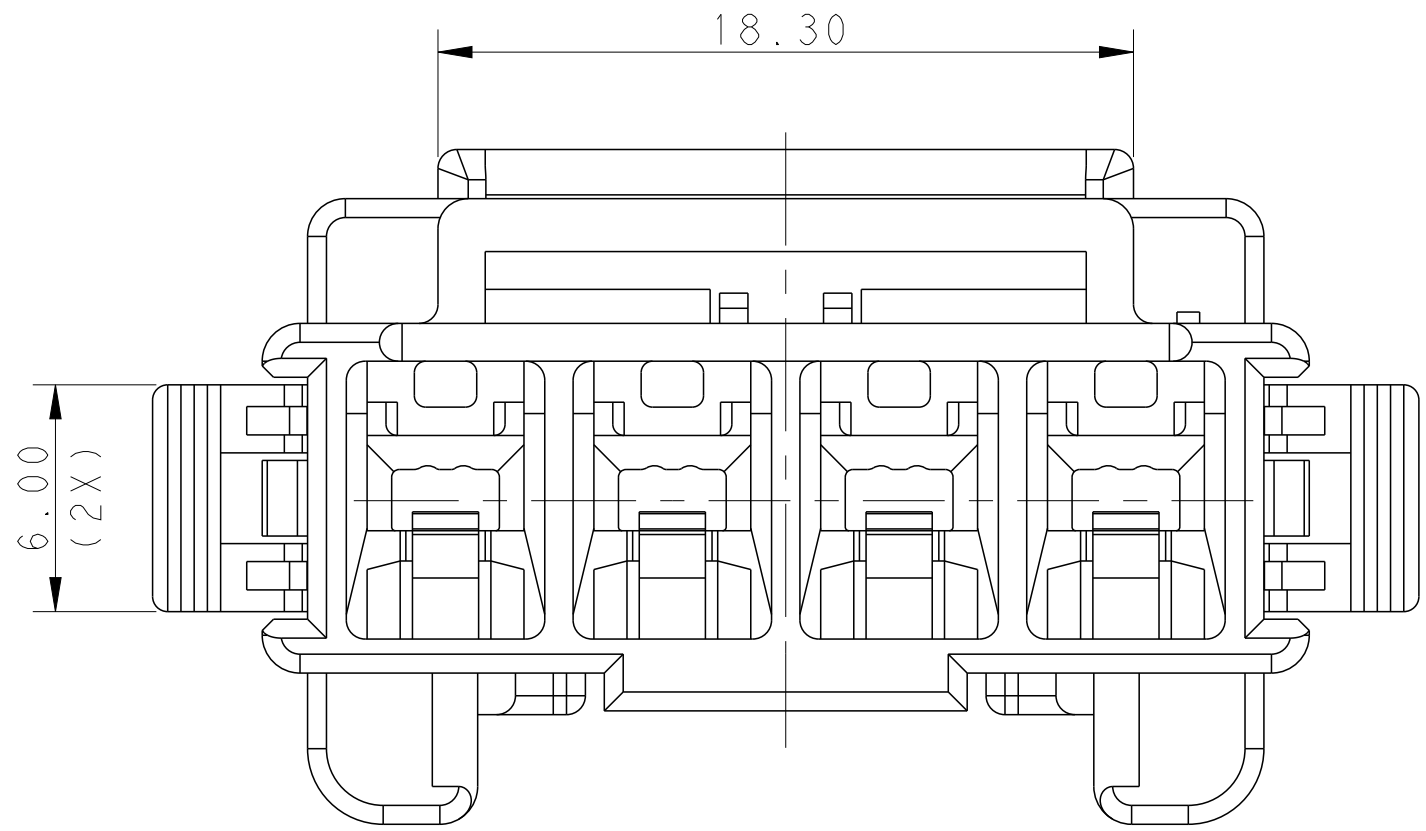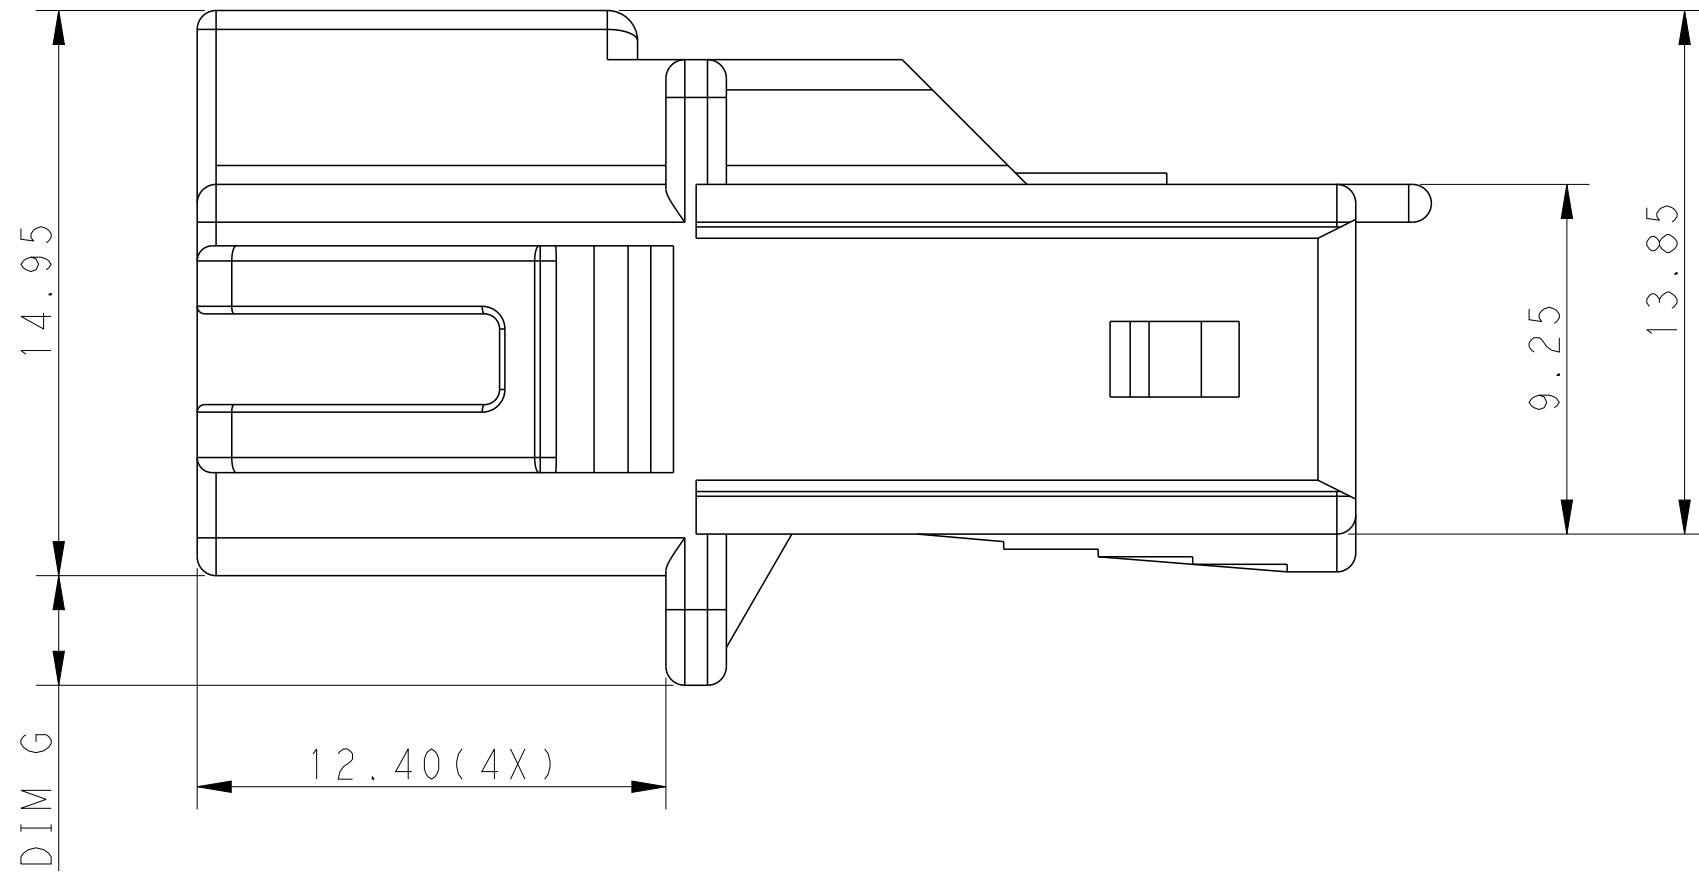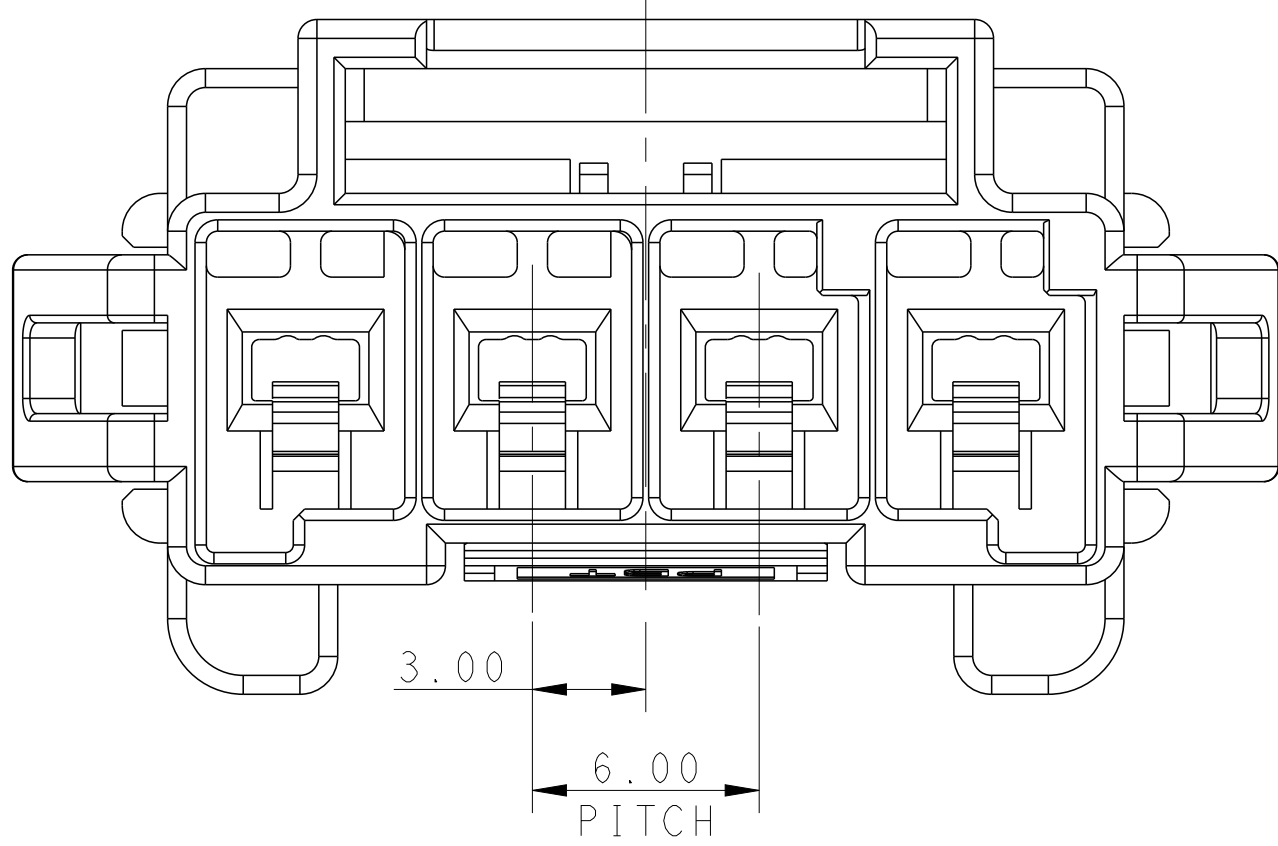

RECOMMENDED PANEL OPENING DIMENSIONS
FOR CAP HOUSING 1*3 POSITION
(TOLERANCE: ±0.15mm)








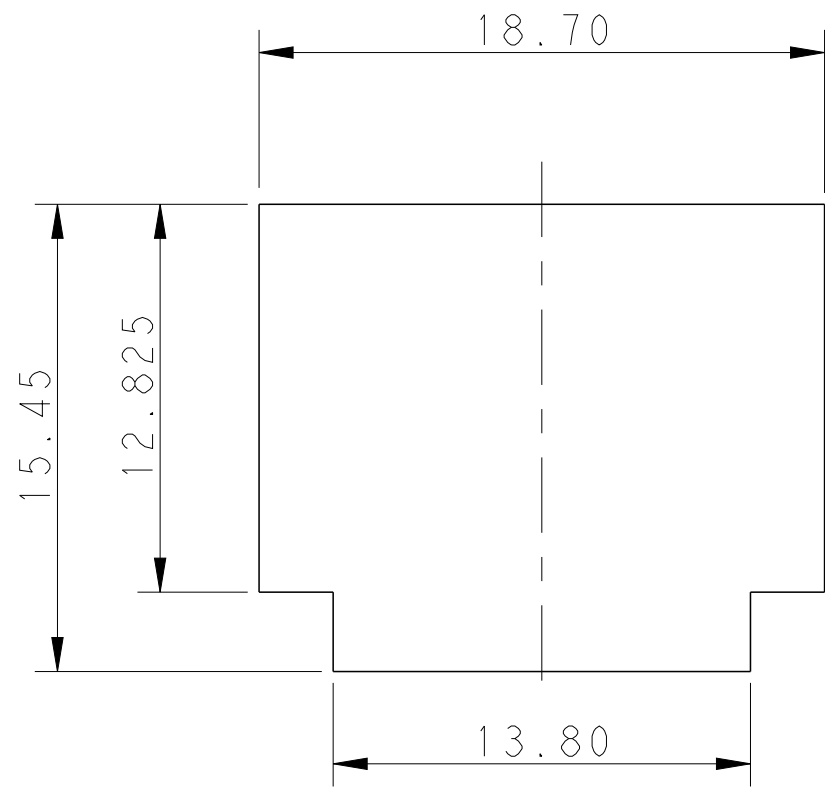


RECOMMENDED PANEL OPENING DIMENSIONS
FOR CAP HOUSING 1*2 POSITION
(TOLERANCE: ±0.15mm)

POS	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F	Dim. G
1*5	33.70	27.50	39.5	31.30	36.70	31.80	2.9
1*4	27.70	21.50	33.5	25.30	30.70	25.80	2.9
1*3	21.70	15.50	27.5	19.30			2.5
1*2	15.70	9.50	21.5	13.30			1.1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TOMMY WU 26MAR2013	TE Connectivity			
DIMENSIONS:		CHK HAPYE WU 26MAR2013				
mm		APVD YUZHONG MAO 26MAR2013	NAME			
		PRODUCT SPEC	CAP HOUSING,PANEL MOUNT,SINGLE ROW			
		108-106118	POWER TRIPLE LOCK			
		APPLICATION SPEC	-			
		114-106118	SIZE			
MATERIAL		WEIGHT	A100779C=2232263			
FINISH		Customer Drawing	RESTRICTED TO			
1 2			SCALE			
			SHEET 1 OF 2			
			REV C			

REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN
-	-	SEE SHEET 1	-	-

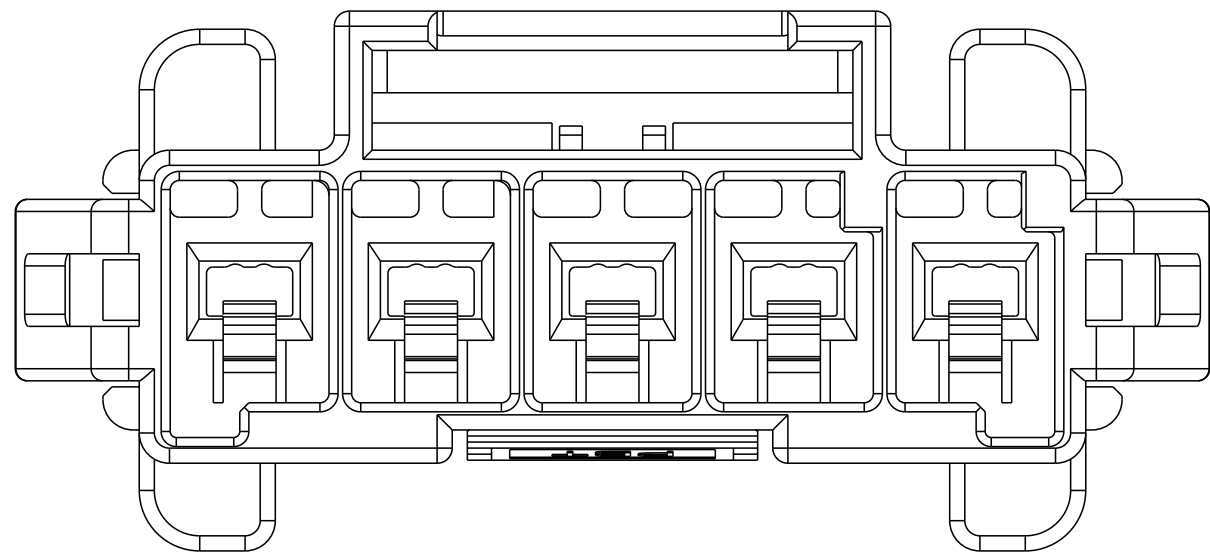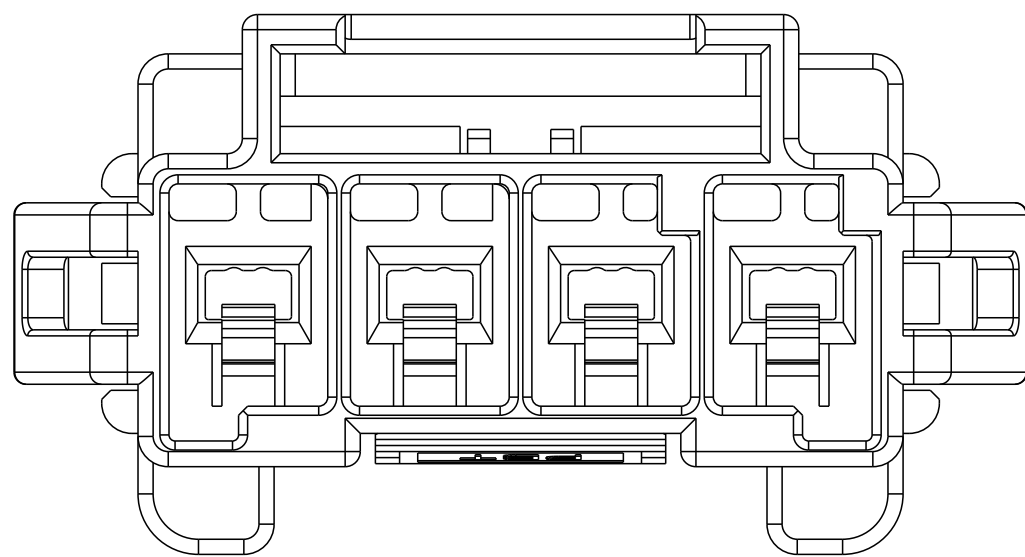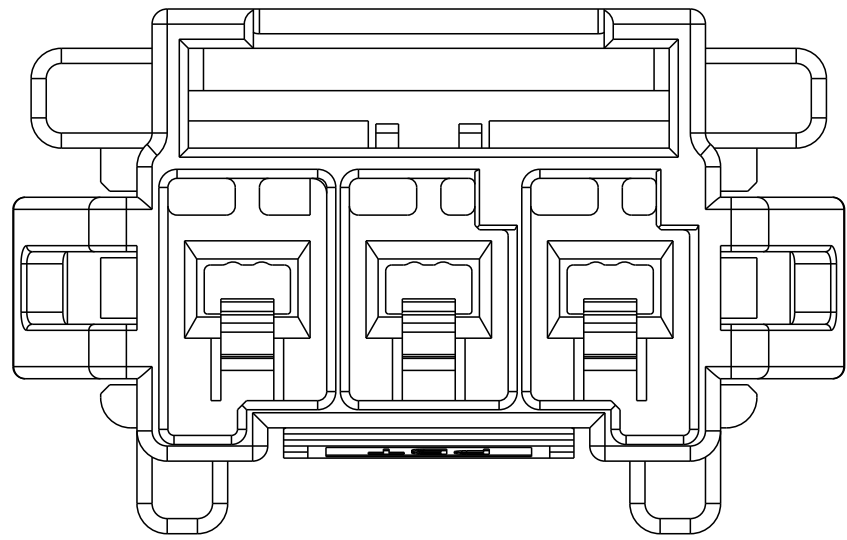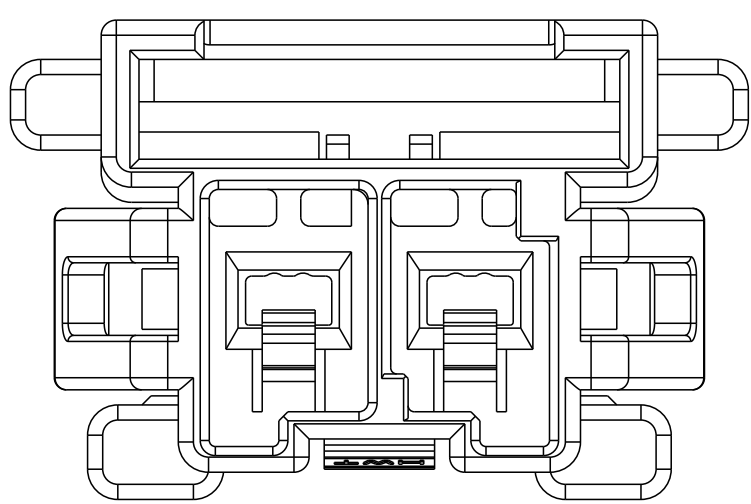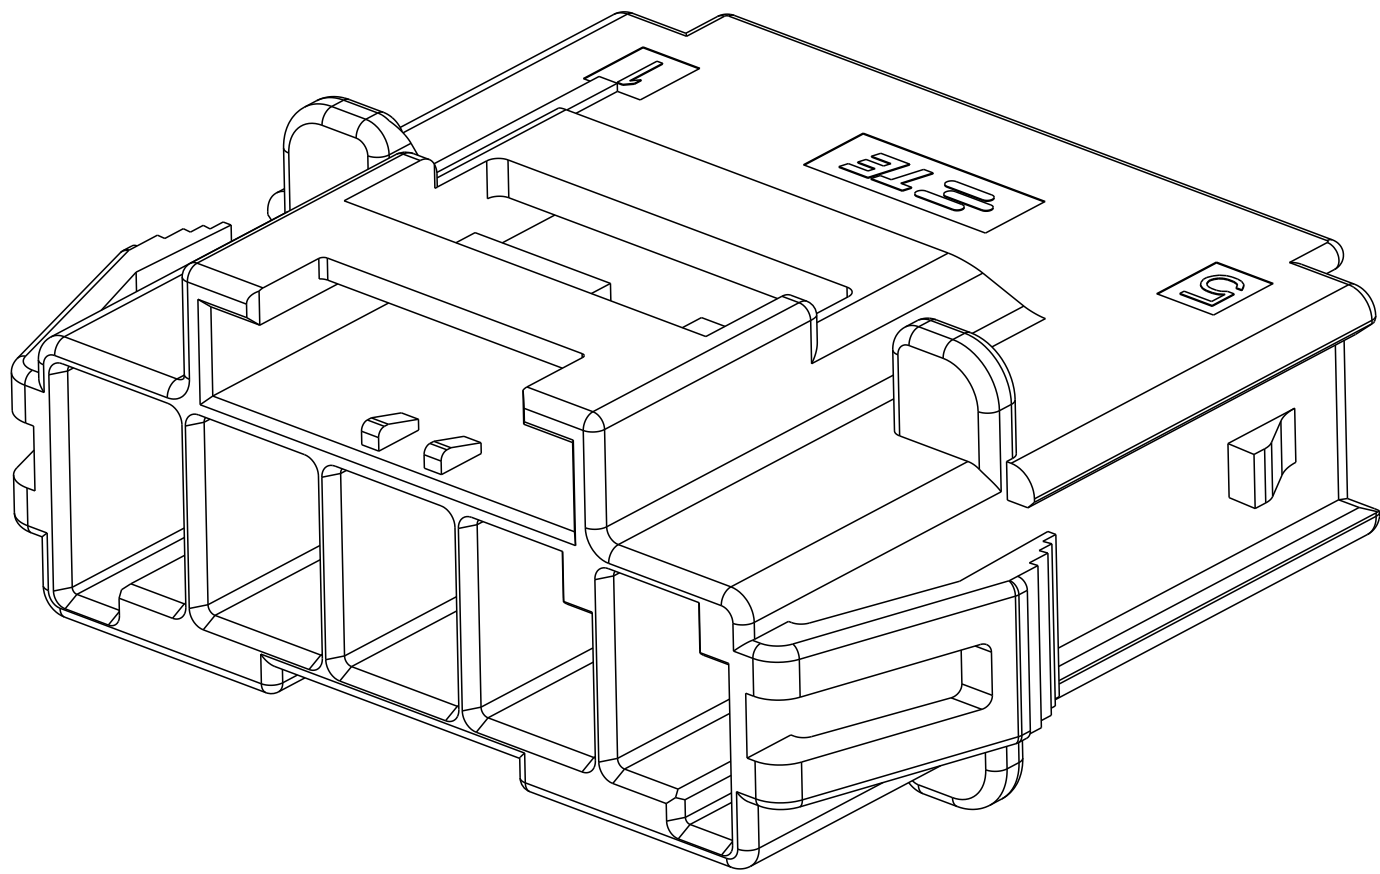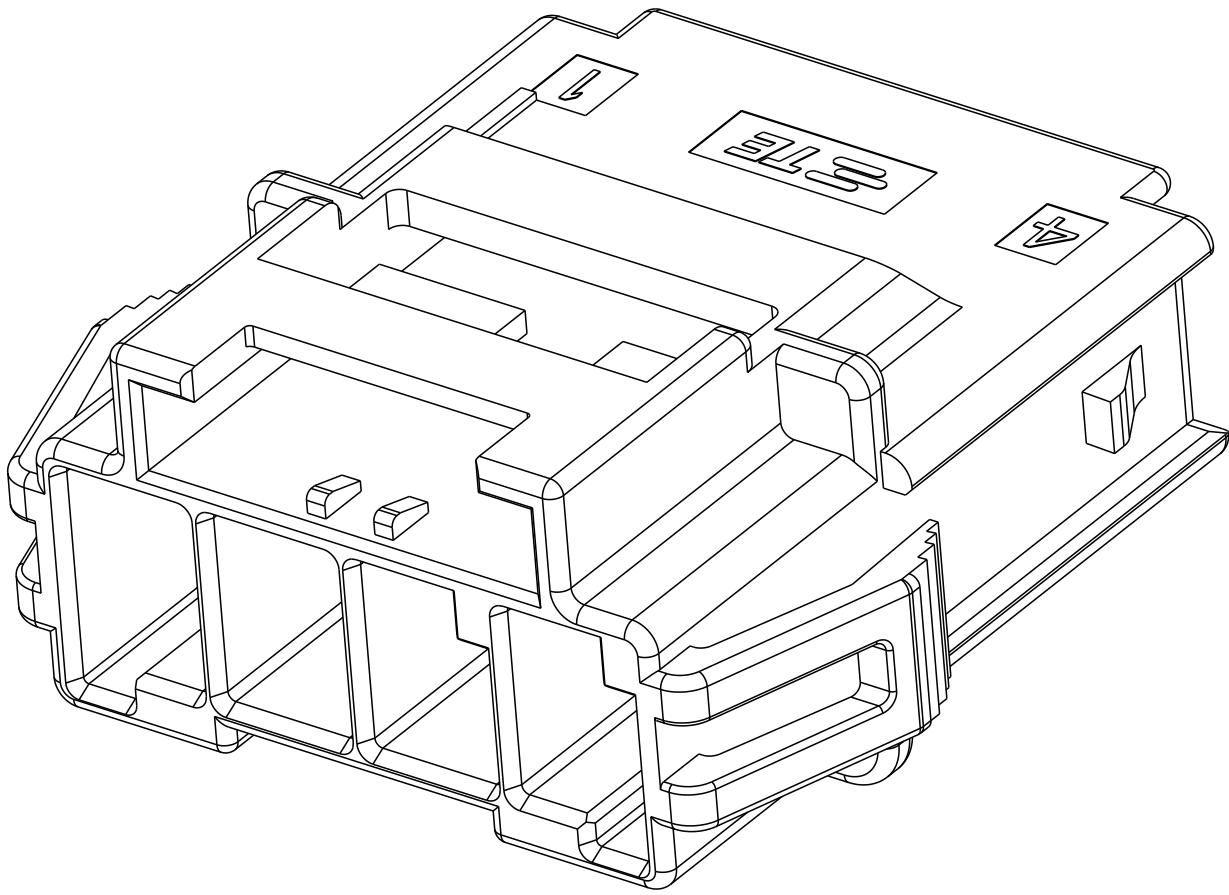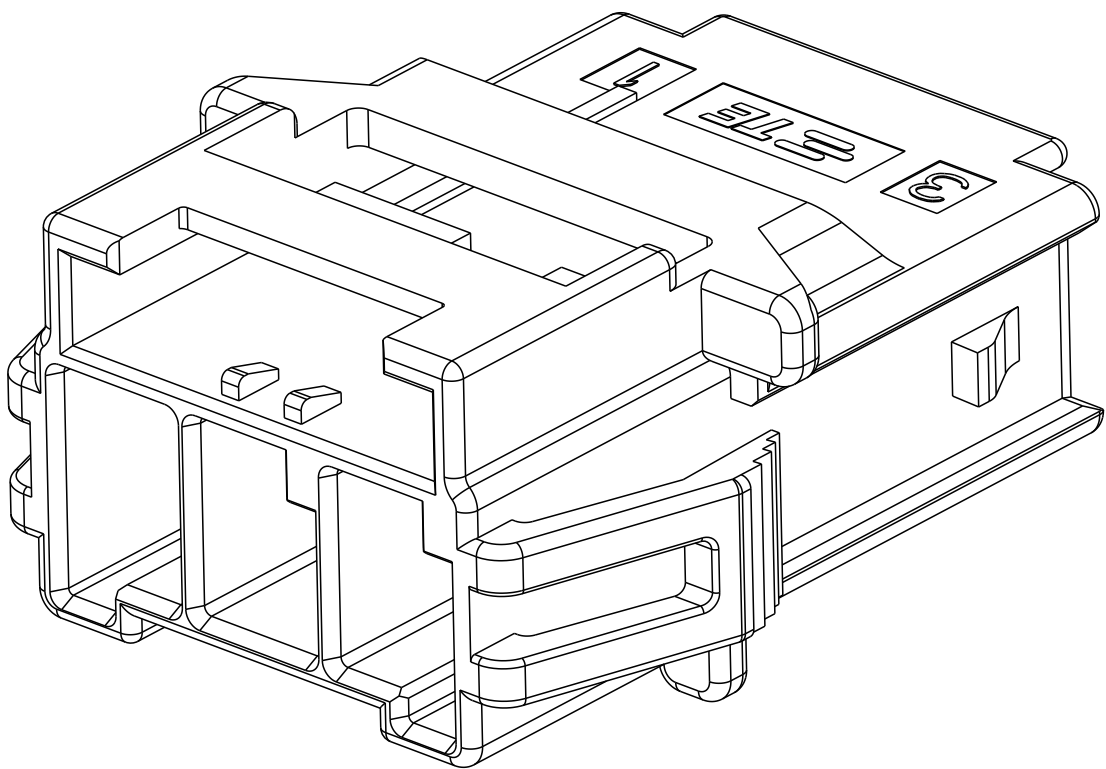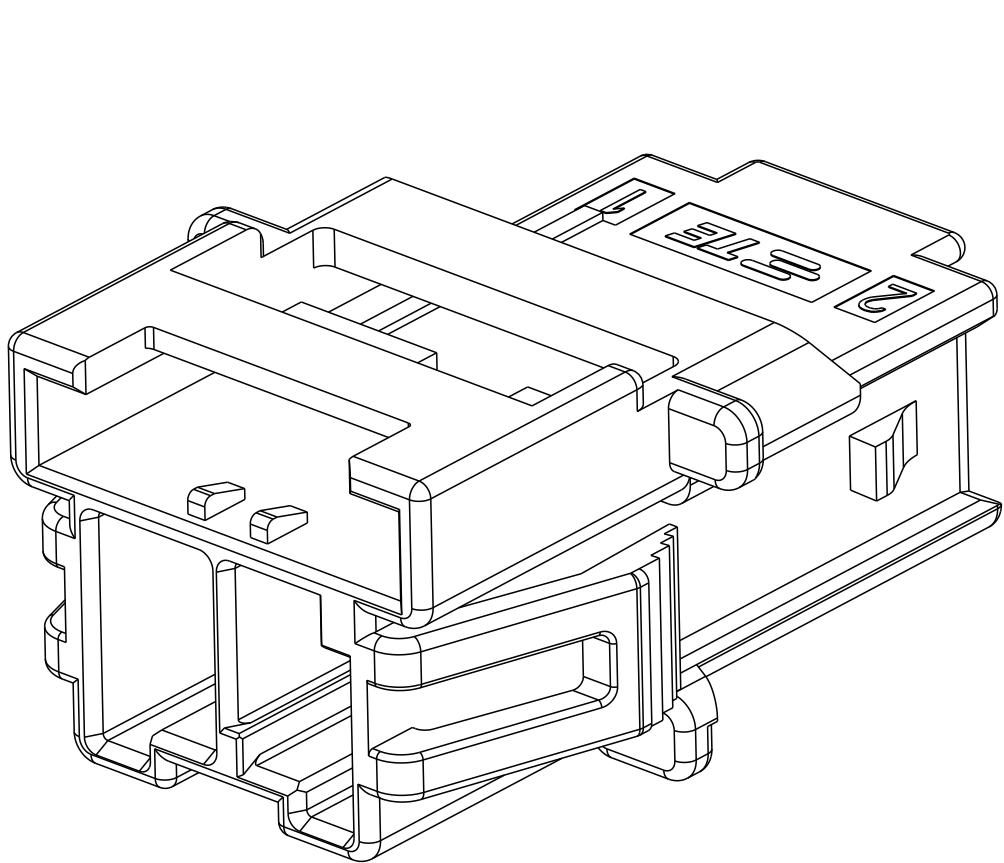


1*2 POSITIONS


1*3 POSITIONS

1*4 POSITIONS


1*5 POSITIONS

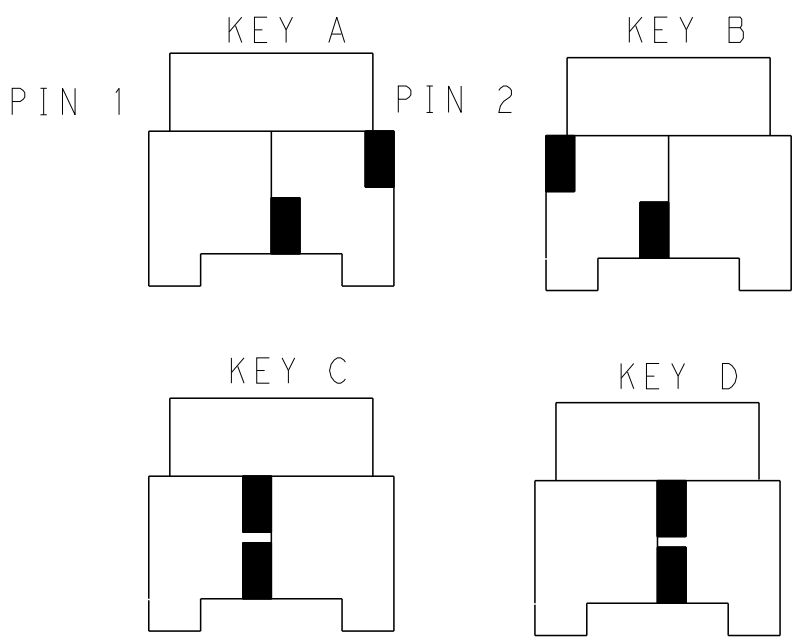


KEYING FOR 1*2 POS.

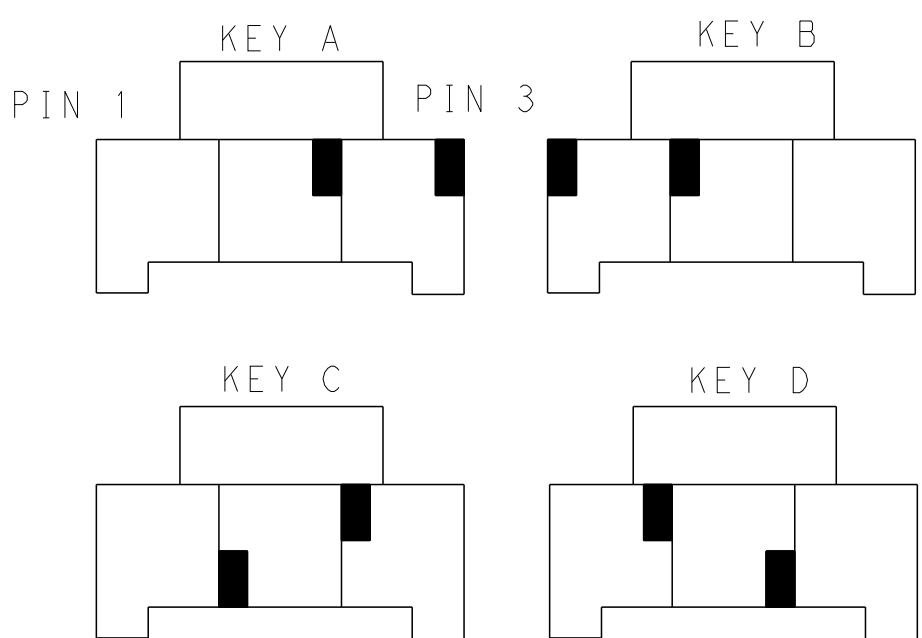

KEYING FOR 1*3 POS.

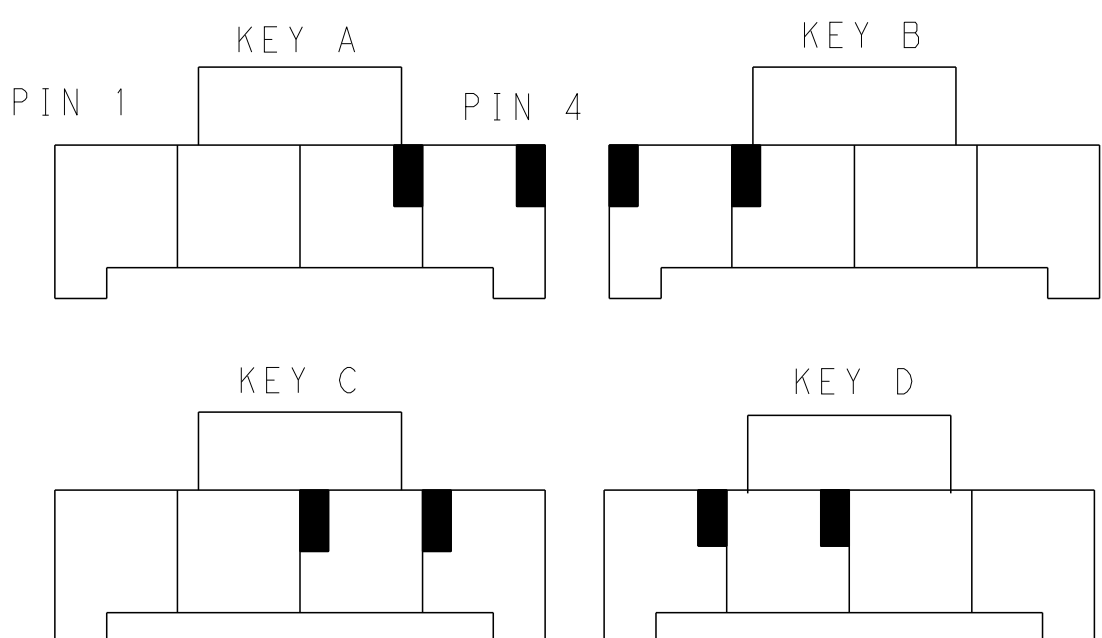

KEYING FOR 1*4 POS.

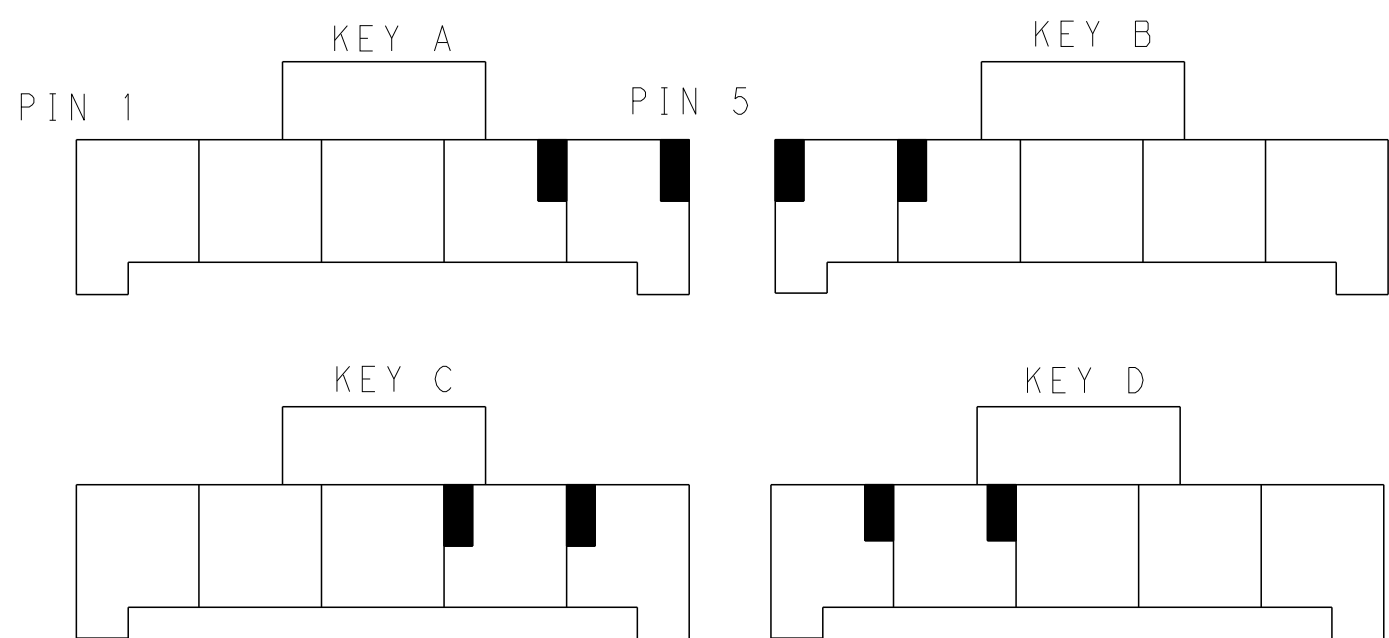

KEYING FOR 1*5 POS.

1*5	LEVEL A	DARK GREY	KEY A	5-2232263-7
		BROWN	KEY B	6-2232263-7
		GREEN	KEY C	7-2232263-7
		ORANGE	KEY D	8-2232263-7
1*4	LEVEL B	BLACK	KEY A	1-2232263-3
	LEVEL A	DARK GREY	KEY A	5-2232263-4
		BROWN	KEY B	6-2232263-4
		GREEN	KEY C	7-2232263-4
		ORANGE	KEY D	8-2232263-4
	LEVEL B	BLACK	KEY A	1-2232263-2
	1*3	LEVEL A	DARK GREY	KEY A
BROWN			KEY B	6-2232263-3
GREEN			KEY C	7-2232263-3
ORANGE			KEY D	8-2232263-3
1*2	LEVEL A	DARK GREY	KEY A	5-2232263-2
		BROWN	KEY B	6-2232263-2
		GREEN	KEY C	7-2232263-2
		ORANGE	KEY D	8-2232263-2
	LEVEL B	NATURAL	KEY B	2-2232263-1
		BLACK	KEY A	1-2232263-1
POS.	MATERIAL	COLOR	KEY	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN TOMMY.WU 26MAR2013
CHK HAPYE.WU 26MAR2013
APVD YUHONG.MAO 26MAR2013

DIMENSIONS:
mm

0 PLC ±0.35
1 PLC ±0.25
2 PLC ±0.20
3 PLC ±0.20
4 PLC ±0.20
ANGLES ±0.20
FINISH -

MATERIAL 1 2

TOLERANCES UNLESS OTHERWISE SPECIFIED:

PRODUCT SPEC 108-106118
APPLICATION SPEC 114-106118
WEIGHT -

Customer Drawing

TE Connectivity

NAME CAP HOUSING,PANEL MOUNT,SINGLE ROW POWER TRIPLE LOCK

SIZE CAGE CODE DRAWING NO. A100779C=2232263

RESTRICTED TO -

SCALE -

SHEET 2 OF 2

REV C

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[8-2232263-3](#)