


# Printed-circuit board connector - MSTBVA 2,5/ 4-G-5,08 ABGY - 1917749

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




PCB headers, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 4, pitch: 5.08 mm, color: Agate gray, contact surface: Tin, mounting: Wave soldering

The figure shows version MSTBVA  
2,5/ 5-G-5,08 AU

## Your advantages

- ✓ Maximum flexibility when it comes to device design – one header for connectors with different connection technologies
- ✓ Well-known mounting principle allows worldwide use
- ✓ Vertical connection enables multi-row arrangement on the PCB
- ✓ Closed contour for optimum stability of the plug-in connection

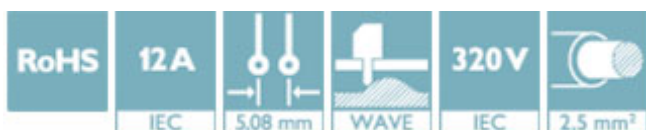

## Key Commercial Data

|              |                                                                                                         |
|--------------|---------------------------------------------------------------------------------------------------------|
| Packing unit | 50 pc                                                                                                   |
| GTIN         | <br>4 017918 472771 |
| GTIN         | 4017918472771                                                                                           |

## Technical data

### Dimensions

|                          |          |
|--------------------------|----------|
| Length [ l ]             | 8.57 mm  |
| Width                    | 22.32 mm |
| Pitch                    | 5.08 mm  |
| Dimension a              | 15.24 mm |
| Width [ w ]              | 22.32 mm |
| Height [ h ]             | 15.9 mm  |
| Height                   | 12 mm    |
| Length of the solder pin | 3.9 mm   |
| Pin dimensions           | 1 x 1 mm |
| Length                   | 8.57 mm  |

### General

# Printed-circuit board connector - MSTBVA 2,5/ 4-G-5,08 ABGY - 1917749

## Technical data

### General

|                                        |                  |
|----------------------------------------|------------------|
| Range of articles                      | MSTBVA 2,5/...-G |
| Rated surge voltage (III/3)            | 4 kV             |
| Rated surge voltage (III/2)            | 4 kV             |
| Rated surge voltage (II/2)             | 4 kV             |
| Rated voltage (III/3)                  | 250 V            |
| Rated voltage (III/2)                  | 320 V            |
| Rated voltage (II/2)                   | 400 V            |
| Connection in acc. with standard       | EN-VDE           |
| Nominal current $I_N$                  | 12 A             |
| Maximum load current                   | 12 A             |
| Flammability rating according to UL 94 | V0               |
| Color                                  | Agate gray       |
| Number of positions                    | 4                |

### Standards and Regulations

|                                        |        |
|----------------------------------------|--------|
| Connection in acc. with standard       | EN-VDE |
|                                        | CSA    |
| Flammability rating according to UL 94 | V0     |

### Environmental Product Compliance

|            |                                                         |
|------------|---------------------------------------------------------|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

## Approvals

### Approvals

#### Approvals

CSA / IECCEB CB Scheme / VDE Gutachten mit Fertigungsüberwachung / EAC / cULus Recognized

#### Ex Approvals

### Approval details

|                       |                                                                                     |                                                                                                                                         |       |
|-----------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|-------|
| CSA                   |  | <a href="http://www.csagroup.org/services-industries/product-listing/">http://www.csagroup.org/services-industries/product-listing/</a> | 13631 |
|                       | D                                                                                   | B                                                                                                                                       |       |
| Nominal voltage $U_N$ | 300 V                                                                               | 300 V                                                                                                                                   |       |
| Nominal current $I_N$ | 10 A                                                                                | 12 A                                                                                                                                    |       |

# Printed-circuit board connector - MSTBVA 2,5/ 4-G-5,08 ABGY - 1917749

## Approvals

|                    |                                                                                   |                                                           |                |
|--------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------|----------------|
| IECEE CB Scheme    |  | <a href="http://www.iecee.org/">http://www.iecee.org/</a> | DE1-58978-B1B2 |
| Nominal voltage UN | 250 V                                                                             |                                                           |                |
| Nominal current IN | 12 A                                                                              |                                                           |                |

|                                            |                                                                                   |                                                                                                                                                                                                                |          |
|--------------------------------------------|-----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| VDE Gutachten mit<br>Fertigungsüberwachung |  | <a href="http://www2.vde.com/de/Institut/Online-Service/VDE-gepruefteProdukte/Seiten/Online-Suche.aspx">http://www2.vde.com/de/Institut/Online-Service/<br/>VDE-gepruefteProdukte/Seiten/Online-Suche.aspx</a> | 40004701 |
| Nominal voltage UN                         | 250 V                                                                             |                                                                                                                                                                                                                |          |
| Nominal current IN                         | 12 A                                                                              |                                                                                                                                                                                                                |          |

|     |                                                                                    |         |
|-----|------------------------------------------------------------------------------------|---------|
| EAC |  | B.01742 |
|-----|------------------------------------------------------------------------------------|---------|

|                    |                                                                                     |                                                                                                                                                       |                 |
|--------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| cULus Recognized   |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | E60425-19931011 |
|                    | D                                                                                   | B                                                                                                                                                     |                 |
| Nominal voltage UN | 300 V                                                                               | 300 V                                                                                                                                                 |                 |
| Nominal current IN | 10 A                                                                                | 12 A                                                                                                                                                  |                 |

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
 Flachsmarktstr. 8  
 32825 Blomberg  
 Germany  
 Tel. +49 5235 300  
 Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[1917749](#)