

SPECIFICATIONS				
PARAMETERS	VALUES	UNITS		
RESONANT FREQUENCY	$3,700 \pm 500$	Hz		
RESONANT IMPEDANCE (MAX)	500	Ohm		
MAX INPUT VOLTAGE	30	Vp-p		
CAPACITANCE @ 1kHZ	20,000 ± 30%	pF		
PLATE MATERIAL	ALLOY	1		
OPERATING TEMPERATURE	-20 ~ +70	°C		
STORAGE TEMPERATURE	-30 ~ +80	°C		


THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.

©2003, Projects Unlimited Inc.

REVISION HISTORY							
LTR	DESCRIPTION	DATE	APPROVED				
-	RELEASED FROM ENGINEERING	4/9/2002					
Α	REVISED TO NEW TEMPLATE	9/4/2003	R.W.				
В	REVISED SPECIFICATIONS	1/9/2004	R.W.				
С	REVISED DIMENSION SIZE AND STYLE	1/19/2006	B.R.				
D	REVISED TO INVENTOR 3-D DRAWING TEMPLATE	8/16/2007	B.R.				

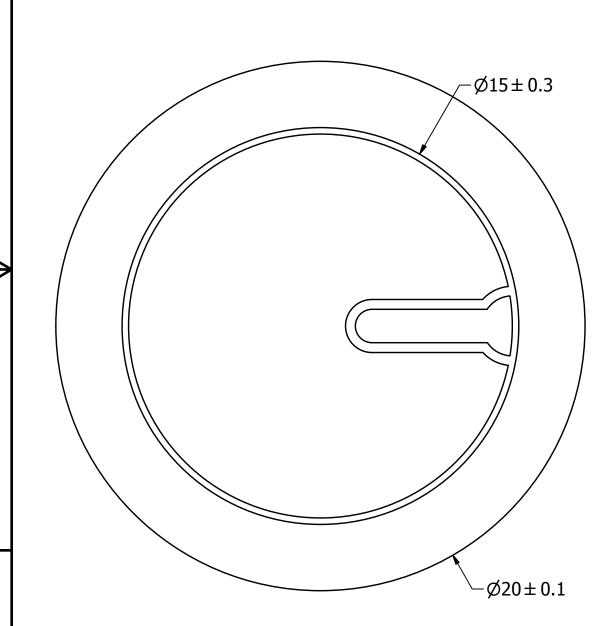

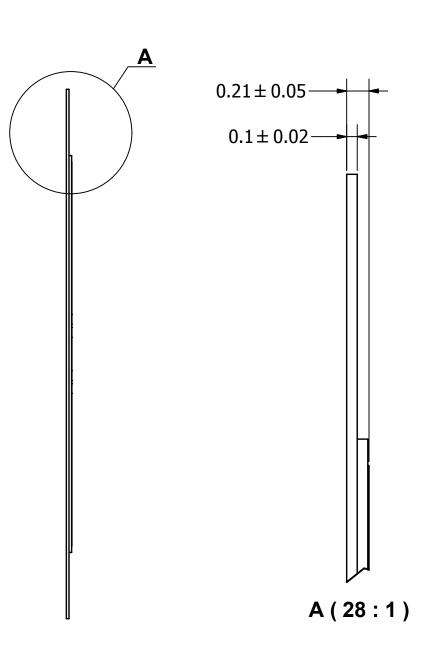

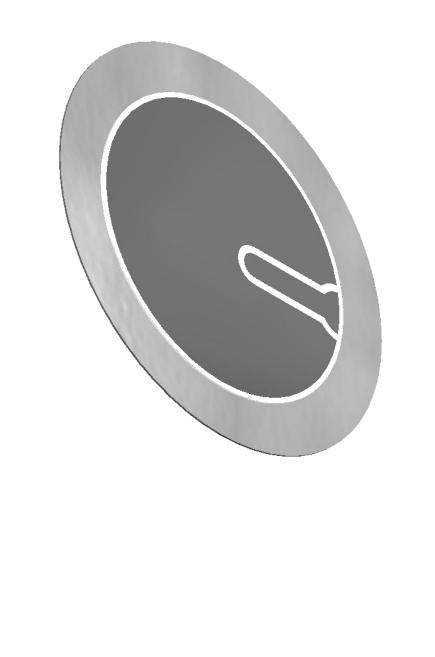

NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
- 3. THIS PART IS ROHS 2011/65/EU COMPLIANT.

UNLESS OTHERWISE SPECIFIED:	CIZE
DIMENSIONS ARE IN MILLIMETERS.	SIZE
TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.	A 3
AB2036	AF.idw

pul .			AB2036AF				
	RABL	4/10/2002			S.J.	4/10/2002	8/16/2007
	Designed by	Date	Checked by	Date	Approved by	Date	Drawn Date

Bender

Edition 1/1

Sheet

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

PUI Audio:

AB2036AF