
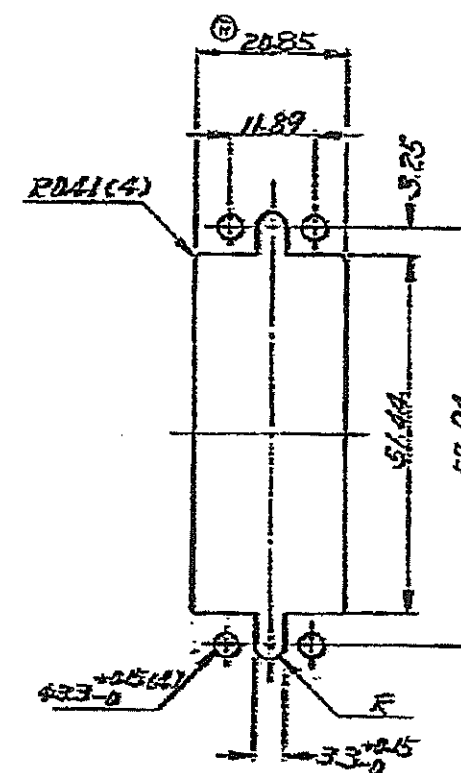


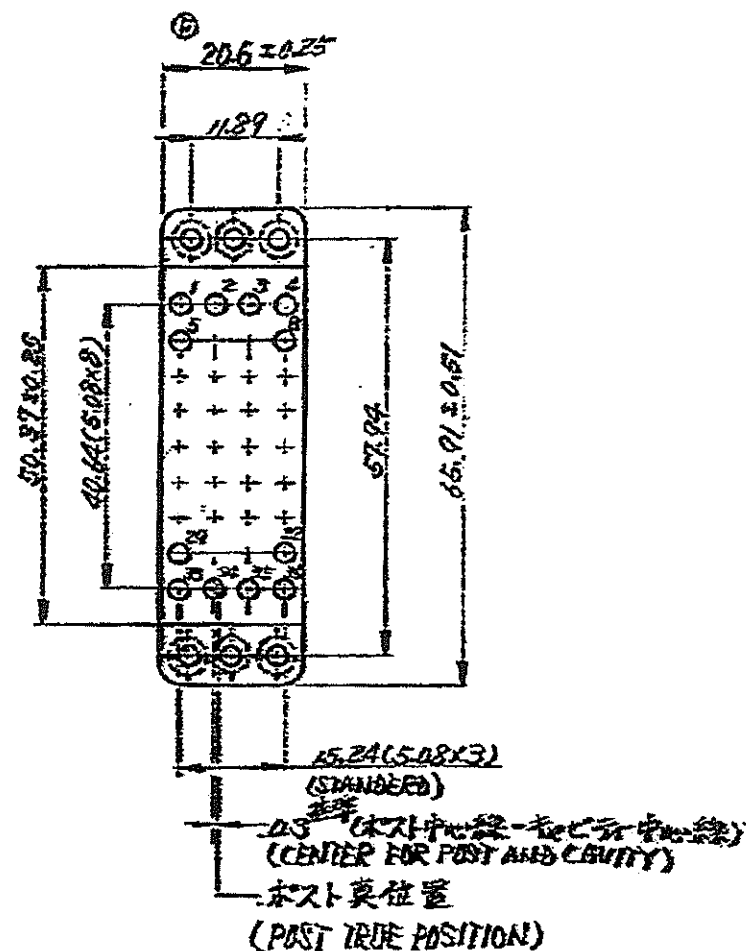

早期文明圖
(PANEL COT ORIENTIAN)

△ インタクトホストの中心線はホスト真位置を中心
とする334の円周に入ること
(FAST ENVELOPE HOST POST TIME POSITION SET MAX)
5 ラッピング用ケーブル — 1000 本数
(CABLE FOR WRAPPING : AMOUNT MAX)

F1	P/N OBSOLETE	ECR-07-002693	Y.Y	D.M	1FEB 2007
F	改定 (EJ00-A246-93)	Y.T	SM	1/2	1/2
E	ADDED: -3 J-12127	SHAKE			1/2
D	CORRECTED (REV. C)	SHAKE			1/2
C	REVISED (REV. C)	21	10	1/2	1/2
B	REVISED (REV. B)	21	10	1/2	1/2
A	REVISED (REV. A)	21	10	1/2	1/2
O	RELEASED	21	10	1/2	1/2
U	RECEIVED	21	10	1/2	1/2

OBSOLETE		OBSOLETE				(POST-PIN CONT.)		(POST=NO-PL AD=FLASH)			
36	#	#	171804-3	0.8	ボルト-ピンコネクタ	↑	↑	板=ニッケルメッキ	4		
#	#	#	171804-1	0.8	ボルト-ピンコネクタ			板=銅-PL	3		
#	#	#	171804-2	0.8	ボルト-ピンコネクタ			板=銅-PL	2		
1	1	1	205076-3	36極 7077 (5.08ピッチ)	(POST-PIN CONT.)			7=1977 色:黒	1		
3	2	1	型番 (P/N)	名	称 (NAME)	材料	及	仕上 (MATERIAL & FINISH)			
SEE MATERIALS (SEE TABLE) 表参照			TOLERANCE EXCEPT AS NOTED		± 0.15	tyco Electronics		Tyco Electronics AMP K.K. Kawasaki, Japan			
SEE FINISH (SEE TABLE) 表参照			CR Cu		2	65 INCH (TYPE H 36 PIN CONNECTOR) M31-2 36極コネクタ					
			DE Ni		1	0.8					
			DR Al		1	A3		C-171744			
			DR Al		1	F1		SHEET			

(CUSTOMER DRAWING)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[171744-3](#)