
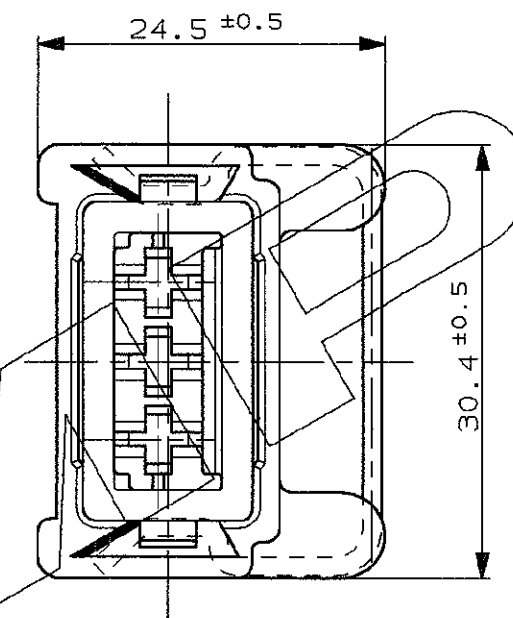
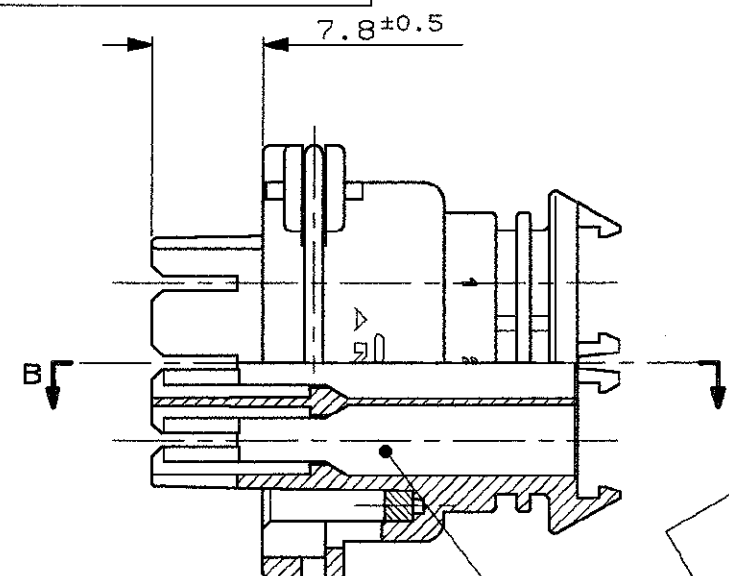


CONNETTORE TIPO A (CON MOLLA DI RITEGNO ESTERNA)
CONNECTOR TYPE A (WITH EXTERNAL SPRING)

SCALA NON IMPEGNATIVA
(DO NOT SCALE)
DIMENSIONI IN mm
(DIMENSIONS IN)

METRIC

PROIEZIONE EUROPEA
(EUROPEAN PROJECTION)

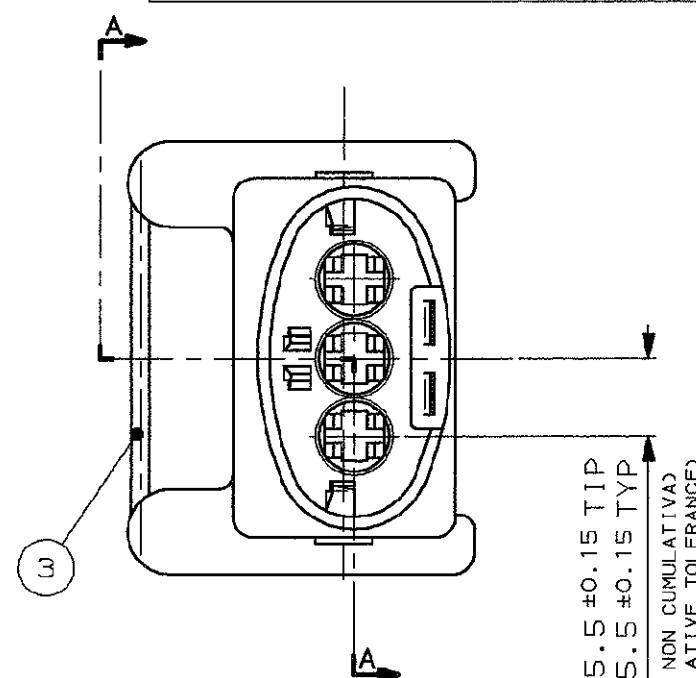

SEZIONE A-A
(SECTION A-A)


TIP. CAVITA' PER TERMINALI AMP JPT P/N 929939-...
OPPURE 929937-... E RELATIVI GOMMINI
AMP P/N 828904-1, 828905-1, 282536-1.
TAPPO CAVITA' P/N 828906-2

(TYP. CAV. FOR JPT CONT. P/N 929939-... A/O 929937-... AND REL.
SINGLE WIRE SEAL P/N 828904-1, 828905-1, 282536-1
CAVITY PLUG P/N 828906-2)

ASSE CAVITA'
CAVITY CENTER LINE



ASSE CONNETTORE
CONNECTOR CENTER LINE

SEZIONE B-B CON SPORTELLO SEC. LOCK APERTO
(SECTION B-B WITH SEC. LOCK DEVICE OPENED)

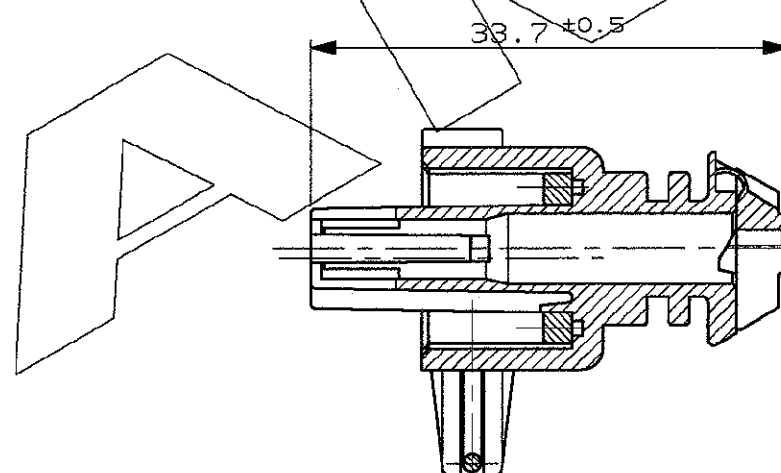


SEZIONE B-B CON SPORTELLO SEC. LOCK CHIUSO
(SECTION B-B WITH SEC. LOCK DEVICE CLOSED)

ROSSO (RED)	---				
GIALLO (YELLOW)	---				
MARRONE (BROWN)	---				
BLU (BLUE)	---	3	\\\\\\\\\\\\\\	ACCIAIO INOX (STAINLESS STEEL)	MOLLA (SPRING)
VERDE (GREEN)	---	2	NERO (BLACK)	GOMMA (RUBBER)	GUARNIZIONE (SEALING)
NATURALE (NATURAL)	---	1	\\\\\\\\\\\\\\	PA 6.6	BLOCCHETTO (HOUSING)
GRIGIO (GREY)	---				
NERO (BLACK)	282246-1				
COLORE COLOR	NUMERO PART. N°	N° (ITEM)	FINITURA / COLORE (FINISH / COLOUR)	MATERIALE (MATERIAL)	DESCRIZIONE (DESCRIPTION)
		CUSTOMER DWG. FOR REFERENCE ONLY		DISEGNO PER CLIENTE SOLO PER RIFERIMENTO	
		THIS DRAWING IS UNPUBLISHED		RELEASE FOR PUBLICATION 19	
		© COPYRIGHT 19 BY AMP INCORPORATED, HARRISBURG, PA. ALL INTERNATIONAL RIGHT RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENT AND/OR PATENT PENDING			
		TOLLERANZE: SE NON DIVERSAMENTE SPECIFICATO (TOLERANCES, UNLESS OTHERWISE SPECIFIED)		DIAM. ISOLANTE (INS. DIA. RANGE) 1.5-3.0 (REDUCED INS. CABLE)	RANGO FILO (WIRE RANGE) 0.5-2.5 mm ²
				SCALA (SCALE) ***	
		± 0.3 ± 2°			
C	ECR-14-003472	MP	24MAR 2014	TE Connectivity	
B	REVISED FOR EC ET00-0370-96	A.F.	9-9 '96	DESCRIZIONE (DESCRIPTION) 3 W. WATER PROOF CONN. ASS'Y with SEC. LOCK FOR PHASE SENSOR	
1	FIRST ISSUE (ALREADY IN PRODUCTION)	R.M.	4-10 93	LOC. SIZE NUMERO (DWG NO)	
REV. (REV. CTR.)	REVISIONI (REVISION RECORD)	DIS. (CDR)	DATA (DATE)	REV. C	
		APP. (APP.)		FOGLIO (SHEET) 1 DI 2	
				I A3 C-282246	

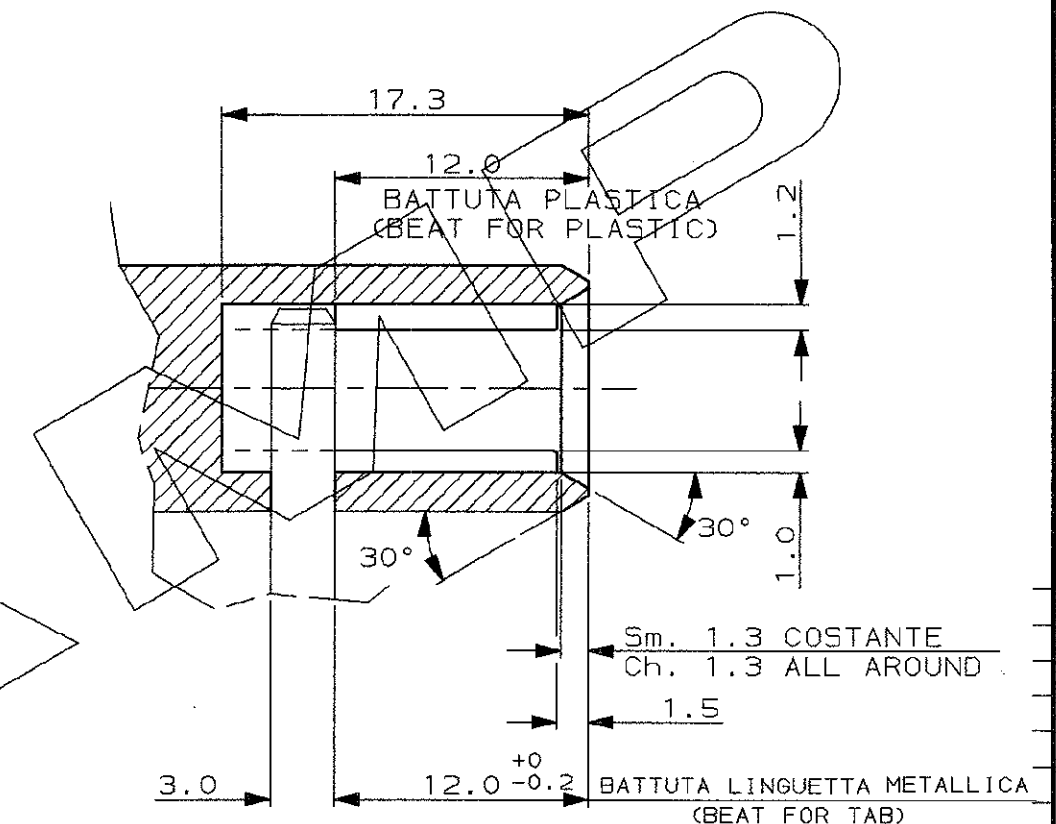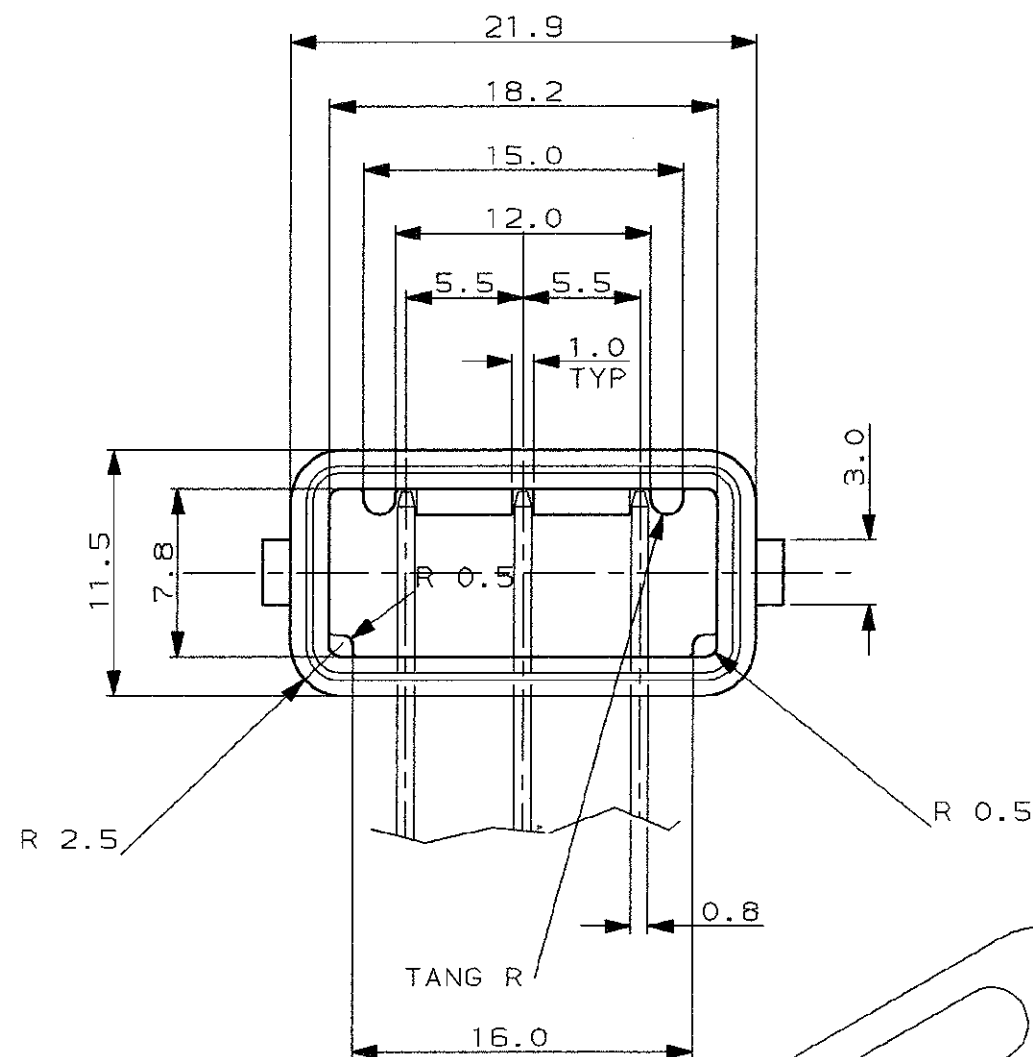

NOTE (NOTES):

- 1) MATERIALE CONTATTI: LEGA DI RAME STAGNATA, ES. OTTONE STAGNATO.
(TAB MATERIAL: TINNED CU ALLOY, E.G. TINNED BRASS).
- 2) MATERIALE BLOCCETTO: TERMOPLASTICO CARICATO FIBRA VETRO.
(HOUSING MATERIAL: THERMOPLASTIC GLASS FIBER FILLED).
- 3) SOLO PER RIF.: CONTROPARTE SENSORE DI FASE (BOSCH).
(ONLY FOR REF.: COUNTERPART PHASE SENSOR BOSCH).

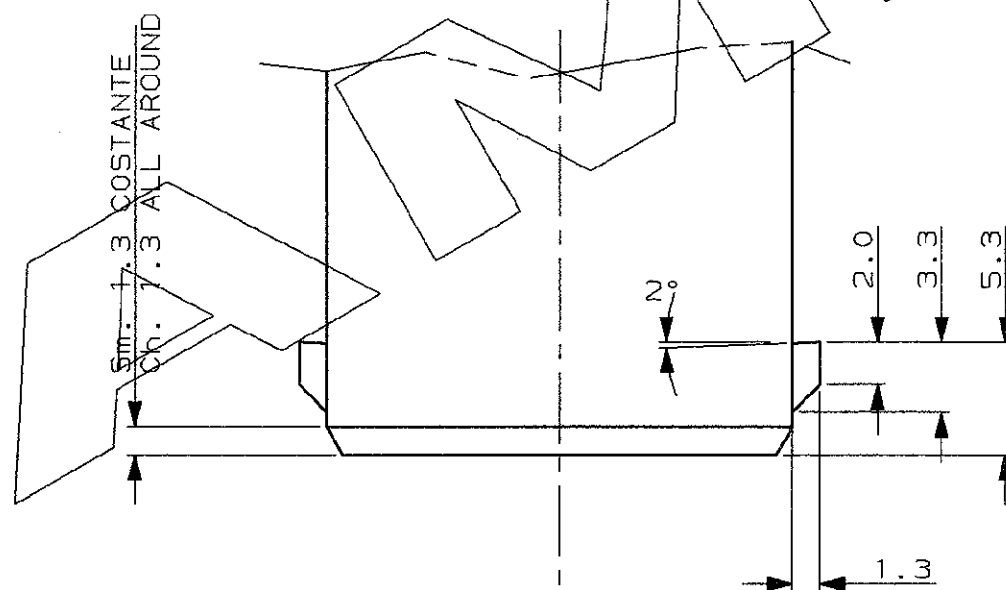

FINITURA / COLORE (FINISH / COLOUR)		MATERIALE (MATERIAL)		NUMERO (PART NUMBER)	
CUSTOMER DWG. FOR REFERENCE ONLY		DISEGNO PER CLIENTE SOLO PER RIFERIMENTO			
THIS DRAWING IS UNPUBLISHED		RELEASE FOR PUBLICATION		19	
© COPYRIGHT 19 BY AMP INCORPORATED, HARRISBURG, PA. ALL INTERNATIONAL RIGHT RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENT AND/OR PATENT PENDING					
TOLLERANZE: SE NON DIVERSAMENTE SPECIFICATO (TOLERANCES: UNLESS OTHERWISE SPECIFIED)		DIAM. ISOLANTE (INS. DIA. RANGE)		RANGO FILO (WIRE RANGE)	
± 0.1		SEE SH.1		SEE SH.1	
ANGOLI (ANGLES)		± 2°		SCALA (SCALE)	
DIS. 4 OCT 93 (DR.)		R. MARTINI		3:1	
CONT. 5 OCT 93 (CHK)		C. TARTARI		TE Connectivity	
SEE SHEET 1 OF 2		DESCRIZIONE (DESCRIPTION)		3 W. WATER PROOF CONN. ASS'Y with SEC. LOCK FOR PHASE SENSOR	
REV. (REV. NO.)		DIS. DATA (DR. DATE)		LOC. SIZE NUMERO (DWG NO)	
REVISIONI (REVISION RECORD)		APP. (APP.)		REV. FOGLIO (SHEET)	
				I A3 C-282246 - 2 OF 2	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[282246-1](#)