

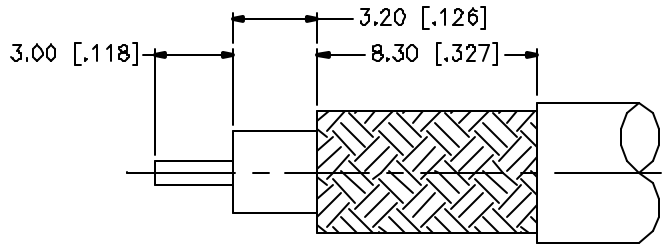
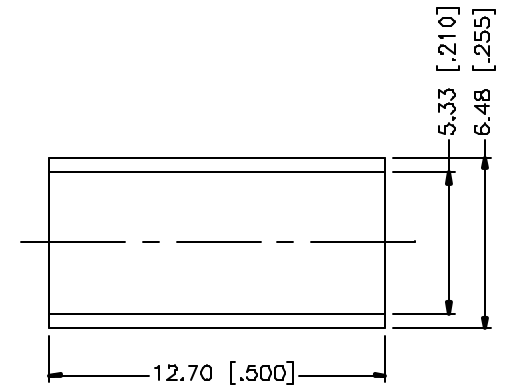


REV.	DATE	DESCRIPTION
NC	04/03/05	INITIAL RELEASE

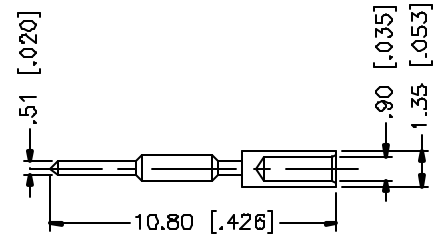

RECOMMENDED  
CABLE STRIPPING DIM'S

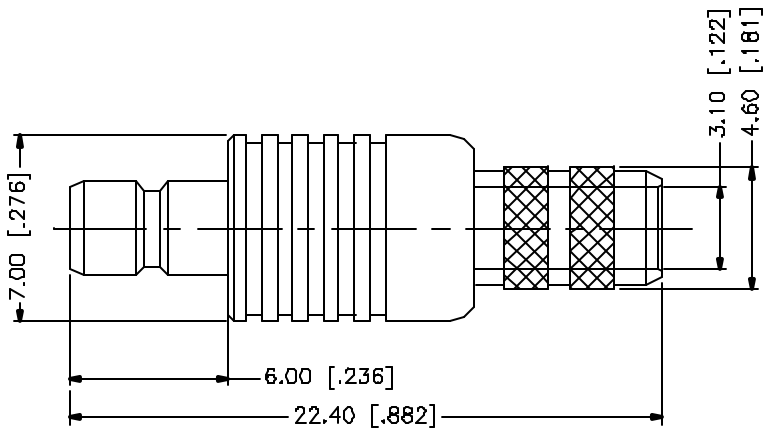

8				
7				
6				
5				
4	FERRULE	COPPER	GOLD	1
3	CONTACT PIN	BRASS	GOLD	1
2	INSULATOR	TEFLON	NATURAL	1
1	BODY	BRASS	GOLD	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:  
 0.5 - 10mm ± 0.20mm  
 11 - 30mm ± 0.40mm  
 31 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:  
 .020 - .315 = ± 0.007"  
 .315 - 1.180 = ± 0.015"  
 1.180 - 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN G.R.S.	04/03/05
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE C:/142/142330.DWG	

<b>Amphenol Connex</b>			
PART DESCRIPTION <b>SMB CRIMP JACK (RG-58/U, 58B/U CABLE)</b>			
PART NO. <b>142330</b>			
DWG. NO.	142330.DWG	REV.	NC
SIZE	A	SCALE	NA

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[142330](#)