

Power Relay 430 3mm

- 1 pole 16A, 1 form A (NO) contact
- Safety mains isolation
- Contact gap >3mm
- DC and AC coil
- 4kV/8mm coil-contact, reinforced insulation (VDE 0700)
- PCB mounting or quick connect terminals
- Mounting brackets or snap mounting
- Version with arc blow magnet for high DC loads
- Product in accordance to IEC 60335-1



F0256-B



Typical applications
 Domestic appliances, industrial appliances, industrial controls

Approvals

VDE REG.-Nr. C820, UL E214024



Technical data of approved types on request

Contact Data

Contact arrangement	1 form A (NO)
Contact gap	>3mm
Rated voltage	250VAC
Max. switching voltage	400VAC
Rated current	16A
Limiting making current, max 4 s, duty factor 10%	25A
Breaking capacity max.	4000VA
Contact material	AgCu3, AgCdO
Contact style	bifurcated contact
Frequency of operation, with/without load	900/18000h ⁻¹

Contact ratings

Type	Contact	Load	Cycles
IEC 61810			
0430 .4 .. 0	A (NO)	16A, 250VAC, cosφ=1, 70°C	50x103
0430 .4 .. 1	A (NO)	16A, 250VAC, cosφ=1, 70°C	50x103
Mechanical endurance			
DC coil		>250x10 ³ operations	
AC coil		>250x10 ³ operations	

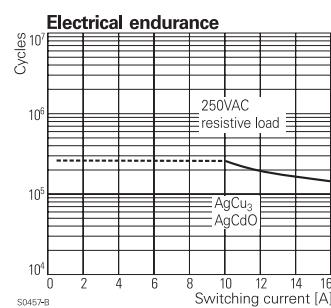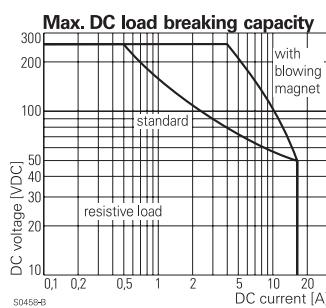
Coil Data

Coil voltage range	6 to 110VDC
DC coil	6 to 240VAC
AC coil	

Operative range, IEC 61810

2

Coil versions, DC coil

Coil code	Rated voltage VDC	Operate voltage VDC	Release voltage VDC	Coil resistance $\Omega \pm 10\%$	Rated coil power mW
09	12	7.8	0.6	145	993
10	24	15.6	1.2	580	993
11	48	31.2	2.4	2200	1047
13	110	71.5	5.5	13000	931

All figures are given for coil without pre-energization, at ambient temperature +23°C.

Other coil voltages on request.

Coil versions, AC coil, 50Hz

Coil code	Rated voltage VAC	Operate voltage VAC	Release voltage VAC	Coil resistance $\Omega \pm 10\%$	Rated coil power VA
23	24	18	3.6	145	1.8
25	60	45	9	950	1.8
26	110	83	16	3100	1.8
27	230	175	35	11400	1.8
28	240	185	36	13000	1.8

All figures are given for coil without pre-energization, at ambient temperature +23°C, 50Hz.

Other coil voltages on request.

Insulation Data


Initial dielectric strength between open contacts	2000V _{rms}
between contact and coil	4000V _{rms}
Clearance/creepage between contact and coil	
Material group of insulation parts	≥8/8mm
Tracking index of relay base	IIIa
	PTI250

Power Relay 430 3mm (Continued)
Other Data


Material compliance: EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at www.te.com/customersupport/rohssupportcenter
Resistance to heat and fire according EN60335, par.30
Ambient temperature -20 to +70°C
Category of environmental protection IEC 61810
Shock resistance (destructive) 100g
Terminal type PCB-THT, quick connect
Mounting PCB, mounting brackets, snap mounting, DIN rail
Weight 32g
Resistance to soldering heat THT IEC 60068-2-20 270°C/10s
Packaging unit 50 pcs.

PCB layout / terminal assignment

Bottom view on solder pins

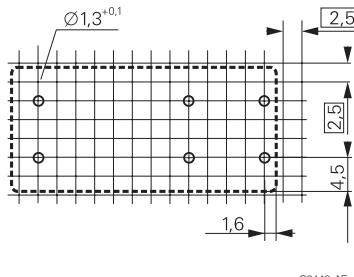


S0448-AE

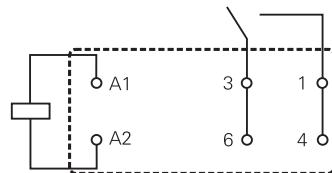

S0448-AF


Dimensions

Snap mounting

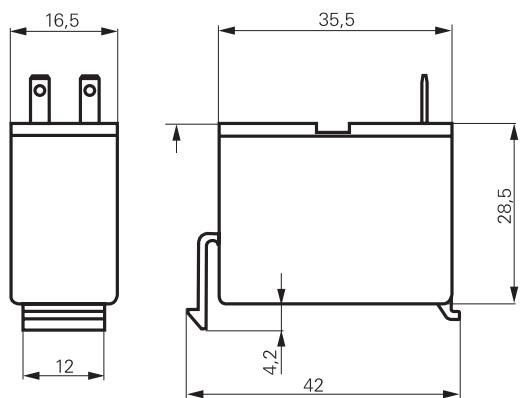


S0449-CH

PCB mounting

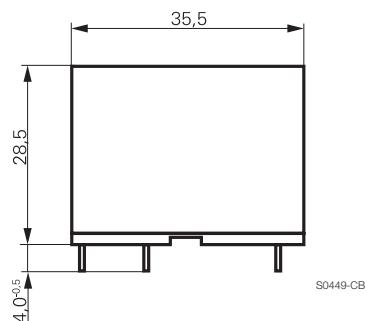

S0449-CB



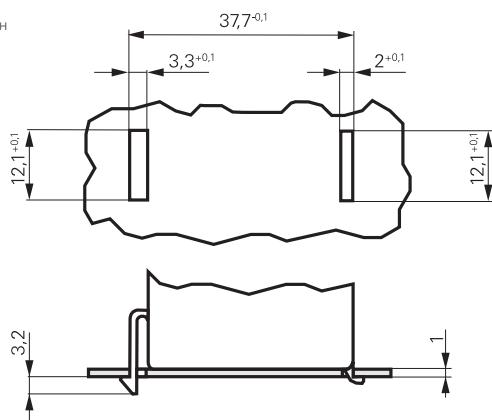


Power Relay 430 3mm (Continued)

Dimensions

Mounting brackets

DIN-rail mount

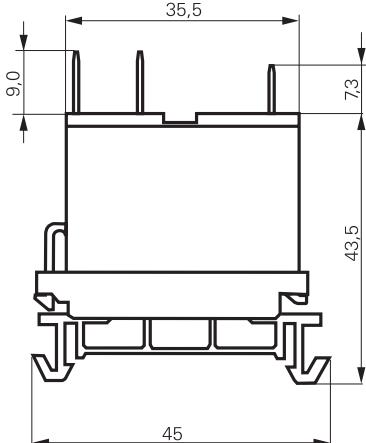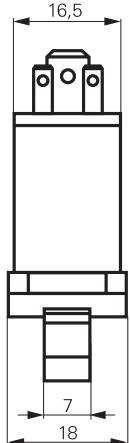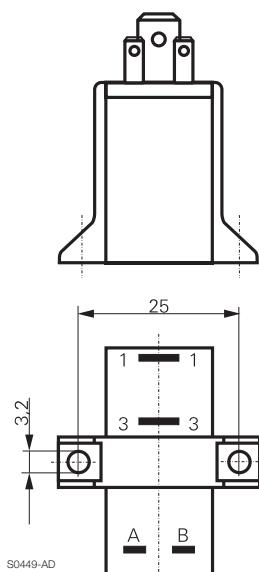
Product code structure

 Typical product code **0430** **2** **5** **09** **1** **100**
Type
0430 Power relay 430 3mm

Mounting
0 PCB version
1 Mounting brackets

2 Snap mounting
5 DIN-rail mounting

Contact design
4 Arc blowing magnet
5 Standard

Coil
 Coil code: please refer to coil versions table

Contact material
0 AgCu 3 **1** AgCdO

Version
100 Standard
 Other types on request

Product code	Mounting	Cont. material	Cont. arrangement	Coil	Part number
0430 25 0911 00	Snap mounting	AgCdO	1 form A	DC coil	1-1415404-1
0430 25 1011 00	1.0mm plate		1 NO contact		1-1415404-3
0430 25 2811 00				AC coil	1-1415404-6

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1415430-4](#)