

## Surge protection device - C-UFB- 5DC/E 75 - 2763604

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Attachment plug with surge voltage coarse and fine protection, for coaxial signal interfaces with floating shield, signal voltage 5 V. Connection: BNC socket/plug

The illustration shows version C-UFB- 5DC/E

### Product Features

- Ground connection via separately led cable
- For insertion in the cable



### Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	113.7 g
Custom tariff number	85363010
Country of origin	Germany

### Technical data

#### Dimensions

Height	25.4 mm
Width	25.4 mm
Depth	93 mm

#### Ambient conditions

Ambient temperature (operation)	-40 °C ... 80 °C
Degree of protection	IP20

#### General

Housing material	Aluminum
Color	black
Standards for clearances and creepage distances	VDE 0110-1

# Surge protection device - C-UFB- 5DC/E 75 - 2763604

## Technical data

### General

	IEC 60664-1
Mounting type	Connection-specific intermediate plugging
Type	Attachment plug
Direction of action	Line-Shield/Earth Ground

### Protective circuit

IEC test classification	C2
	C3
	D1
Maximum continuous voltage $U_C$	5 V DC
Maximum continuous voltage $U_C$ (wire-shield)	5 V DC
Nominal current $I_N$	185 mA (25 °C)
Operating effective current $I_C$ at $U_C$	≤ 300 µA
Residual current $I_{PE}$	≤ 2 µA
Nominal discharge current $I_n$ (8/20) µs (Core-Earth)	10 kA
Nominal discharge current $I_n$ (8/20) µs (Core-Shield)	10 kA
Total surge current (8/20) µs	20 kA
Output voltage limitation at 1 kV/µs (Core-Earth) spike	≤ 500 V
Output voltage limitation at 1 kV/µs (Core-Shield) spike	≤ 35 V
Output voltage limitation at 1 kV/µs (Core-Shield) static	≤ 15 V
Residual voltage at $I_n$ (conductor-shield)	≤ 12 V
Voltage protection level $U_p$ (core-ground)	≤ 500 V (C1 - 1 kV/500 A)
	≤ 500 V (C3 - 10 A)
Voltage protection level $U_p$ (core-shield)	≤ 55 V (C1 - 1 kV/500 A)
	≤ 25 V (C3 - 10 A)
Response time tA (Core-Earth)	≤ 100 ns
Response time tA (Core-GND)	≤ 500 ns
Input attenuation aE, asym.	1.3 dB (≤ 5 MHz)
Cut-off frequency $f_g$ (3 dB), asym. (shield) in 50 Ohm system	typ. 80 MHz
Impulse durability (conductor-ground)	C2 - 10 kV/5 kA
	D1 - 2,5 kA

### Connection data

Connection method	BNC 75 Ω
Connection type IN	BNC socket
Connection type OUT	BNC plug

Connection, equipotential bonding

## Surge protection device - C-UFB- 5DC/E 75 - 2763604

### Technical data

#### Connection, equipotential bonding

Connection method	PVC litz wire
-------------------	---------------

#### Standards and Regulations

Standards/regulations	IEC 61643-21
-----------------------	--------------

### Classifications

#### eCl@ss

eCl@ss 4.0	27140201
eCl@ss 4.1	27130801
eCl@ss 5.0	27130801
eCl@ss 5.1	27130801
eCl@ss 6.0	27130807
eCl@ss 7.0	27130807
eCl@ss 8.0	27130807
eCl@ss 9.0	27130807

#### ETIM

ETIM 2.0	EC000943
ETIM 3.0	EC000943
ETIM 4.0	EC000943
ETIM 5.0	EC000943

#### UNSPSC

UNSPSC 6.01	30212010
UNSPSC 7.0901	39121610
UNSPSC 11	39121610
UNSPSC 12.01	39121610
UNSPSC 13.2	39121620

### Approvals

#### Approvals

---

#### Approvals

---

#### EAC / EAC

## Surge protection device - C-UFB- 5DC/E 75 - 2763604

### Approvals

Ex Approvals

---

Approvals submitted

---

### Approval details

EAC

EAC

### Accessories

Accessories

Flange coupling

Connector/Adapter - BNC-V 75 - 2805070



BNC connector, single-level, for mounting on NS 32 or NS 35/7.5, wave impedance: 75 Ohm

---

Connector/Adapter - BNC-DV 75 - 2805083




BNC connector, 2-pos., double-level, for mounting on NS 32 or NS 35/7.5, wave impedance: 75 Ω

---

### Drawings

## Surge protection device - C-UFB- 5DC/E 75 - 2763604

Circuit diagram

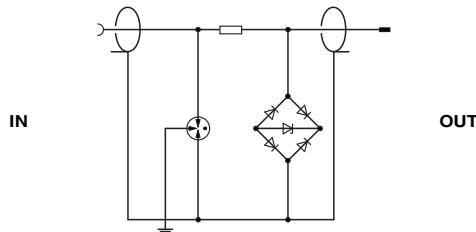

---

Phoenix Contact 2016 © - all rights reserved  
<http://www.phoenixcontact.com>

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[2763604](#)