


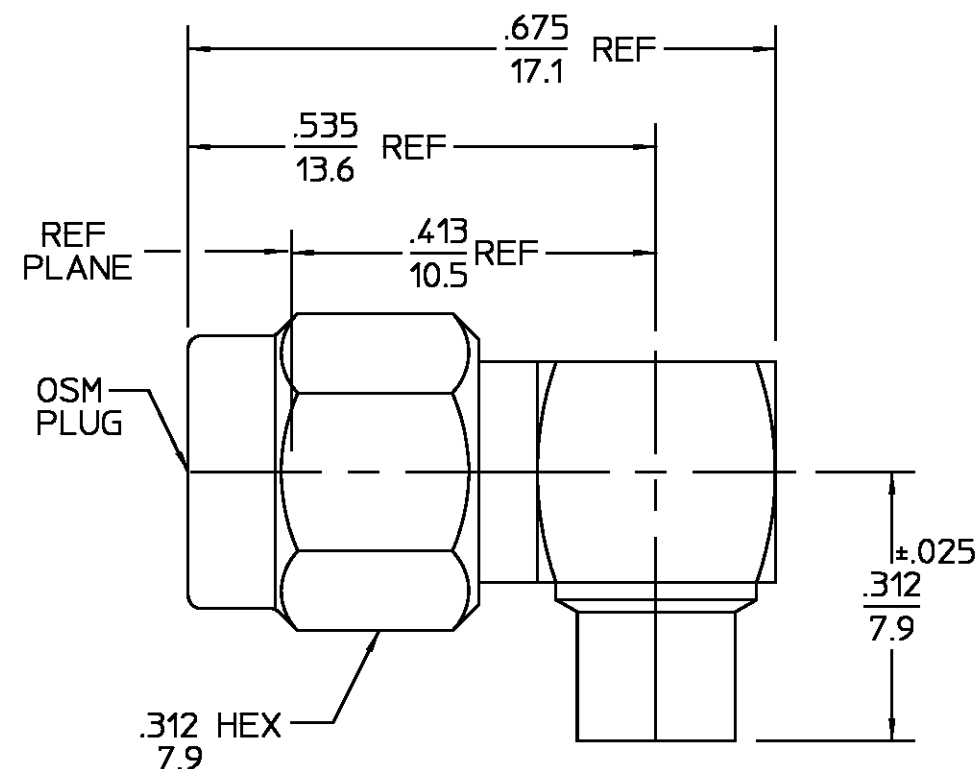

DESIGNED FOR USE WITH	
.141 (RG-402) S/R CABLE	
CABLE ENTRY DIAMETER	
MINIMUM	
CONTACT	.037
HOUSING	.145

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
03 ₀	REVISED	01/25/95	AD

HOUSING
COUPLING NUT
CAP

STAINLESS STEEL PER
ASTM-A484 AND ASTM-
A582, TYPE 303

GOLD PLATE PER
MIL-G-45204

DIELECTRIC

TFE FLUOROCARBON
PER ASTM-D-1457

N/A

CENTER CONTACT

BERYLLIUM COPPER PER
ASTM-B-196 OR ASTM-B-197
ALLOY C17300, CONDITION H

GOLD PLATE PER
MIL-G-45204 OVER

RETAINING RING

BERYLLIUM COPPER PER
ASTM-B-194, ALLOY
C17200, CONDITION H

N/A

GASKET

SILICONE RUBBER PER
ZZ-R-765

N/A

COMPONENT	MATERIAL	FINISH
-----------	----------	--------

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES

DRAWN BY
BWC 6/5/67
CHECKED BY
EJD 7/7/67
APPD BY
D. NANIA 7/8/67



AMP Incorporated
140 Fourth Avenue
Waltham, MA 02451-7599

These drawings and speci-
fications are the property of
M/A COM Interconnect Div.
and shall not be reproduced
or copied or used in whole
or in part as the basis for
the manufacture or sale o
f item(s) without written
permission.

USE ASSY PROCEDURE
408-04831
NO. A.P. (20-016)

TITLE OSM HIGH FREQUENCY RIGHT
ANGLE CABLE PLUG -DIRECT
SOLDER ATTACHMENT

SIZE	CODE IDENT NO.	REV
B	26805	03 ₀
SCALE: 5:1		SHEET 1 OF 1

ELECTRICAL	MECHANICAL	ENVIRONMENTAL
Nominal Impedance (Ohms) 50	Interface Dimensions MIL-STD-348, Fig. 310.1	Temperature Rating -65°C To 125°C
Frequency Range (GHz) DC to 12	Recommended Mating	Vibration MIL-STD-202, Method 204, Condition D
Volt Rating (VRMS MAX) @ Sea Level 500	Torque 7-10 Inch-Lbs	Shock MIL-STD-202, Method 213, Condition I
VSWR 1.10 + .010 f GHz	Mating Characteristics:	Thermal Shock MIL-STD-202, Method 107, Condition B,
Insertion Loss (dB MAX) .05√fGHz	Insertion (MAX Lbs) N/A	Except High Temp 115°C
RF Leakage (dB MIN) -60 @ 2 To 3 GHz	Withdrawal (MIN Oz) N/A	Moisture Resistance MIL-STD-202, Method 106, Except Vibration
Corona, 70,000 Ft (VRMS MIN) 375	Force to Engage and	Shall Be Omitted
Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level 1500	Disengage (In/Lbs MAX) 2.0	Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray
Contact Resistance (Milliohms MAX)	Center Contact Captivation	
Center Contact 3.0	Axial (Lbs) 6.0	
Outer Contact 2.0	Radial (In/Oz) 4.0	
Cable to Housing 0.5	Cable Retention	
RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) 1000	Axial Force (Lbs) 60	
I.R.(Megohms MIN) 5.000	Torque (In/Oz) 55	
	Weight (Grams) 3.9	

.XXX = in
XX.X = mm

CUSTOMER DRAWING

AMP PART # 1051150-1
SHEET 1 OF 1 REV A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2007-7941-00](#)