

Protective covers - HC-B 24-TMS-SD-IP50 - 1690765

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Protective cover B24, Clip locking, Protective cover material: PA, With lanyard



Key Commercial Data

Packing unit	1 pc
Minimum order quantity	10 pc
Weight per Piece (excluding packing)	45.53 g
Custom tariff number	85389099
Country of origin	Germany

Technical data

Dimensions

Diameter of retaining cord eyelet	3.5 mm
-----------------------------------	--------

Ambient conditions

Degree of protection	IP50
Ambient temperature (operation)	-20 °C ... 100 °C

General

Type	B24
	HC-ADVANCE protective cover
Flammability rating according to UL 94	V0
Color	gray
Seal present	no
Assembly instructions	Tightening torque of locking screw: 3 Nm

Standards and Regulations

Flammability rating according to UL 94	V0
--	----

Protective covers - HC-B 24-TMS-SD-IP50 - 1690765

Classifications

eCl@ss

eCl@ss 4.0	27141210
eCl@ss 4.1	27141210
eCl@ss 5.0	27142104
eCl@ss 5.1	27142104
eCl@ss 6.0	27142104
eCl@ss 7.0	27142104
eCl@ss 8.0	27440208
eCl@ss 9.0	27440208

ETIM

ETIM 2.0	EC000241
ETIM 3.0	EC002040
ETIM 4.0	EC002040
ETIM 5.0	EC002314

UNSPSC

UNSPSC 6.01	30212113
UNSPSC 7.0901	39121712
UNSPSC 11	39121712
UNSPSC 12.01	39121712
UNSPSC 13.2	39121712

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approvals submitted

Approval details


Protective covers - HC-B 24-TMS-SD-IP50 - 1690765

Approvals

EAC

Drawings

Dimensional drawing

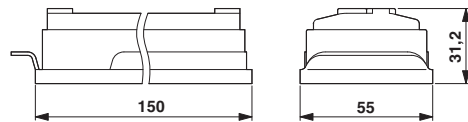

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Phoenix Contact:

1690765