



PART NAME	NBF SERIES PLASTIC NEMA BOX	PART No.	NBF-32036 & NBF-32136 & NBF-32236 & NBF-32336 & NBF-32436	REVISION DATE	7/8/2010
-----------	-----------------------------	----------	---	---------------	----------

MATERIAL	FLAMMABILITY RATING	CONTINUOUS OPERATING TEMP.
ABS	UL94-HB	-40°C ~ +60°C / -40°F ~ 140°F
CLEAR PC	UL94-V0 UV STABILIZED	-40°C ~ +130°C / -40°F ~ 266°F
ABS / PC BLEND	UL94-5VA	-40°C ~ +85°C / -40°F ~ 185°F
PBT / PC BLEND	UL94-5VA + UV (f1)	-40°C ~ +75°C / -40°F ~ 167°F



FINISH:
BODY _____ LIGHT GRAY
COVER _____ LIGHT GRAY OR CLEAR
LATCHES & HINGES _____ PLASTIC
WALL MOUNTING BRACKETS__ STAINLESS STEEL & HARDWARE

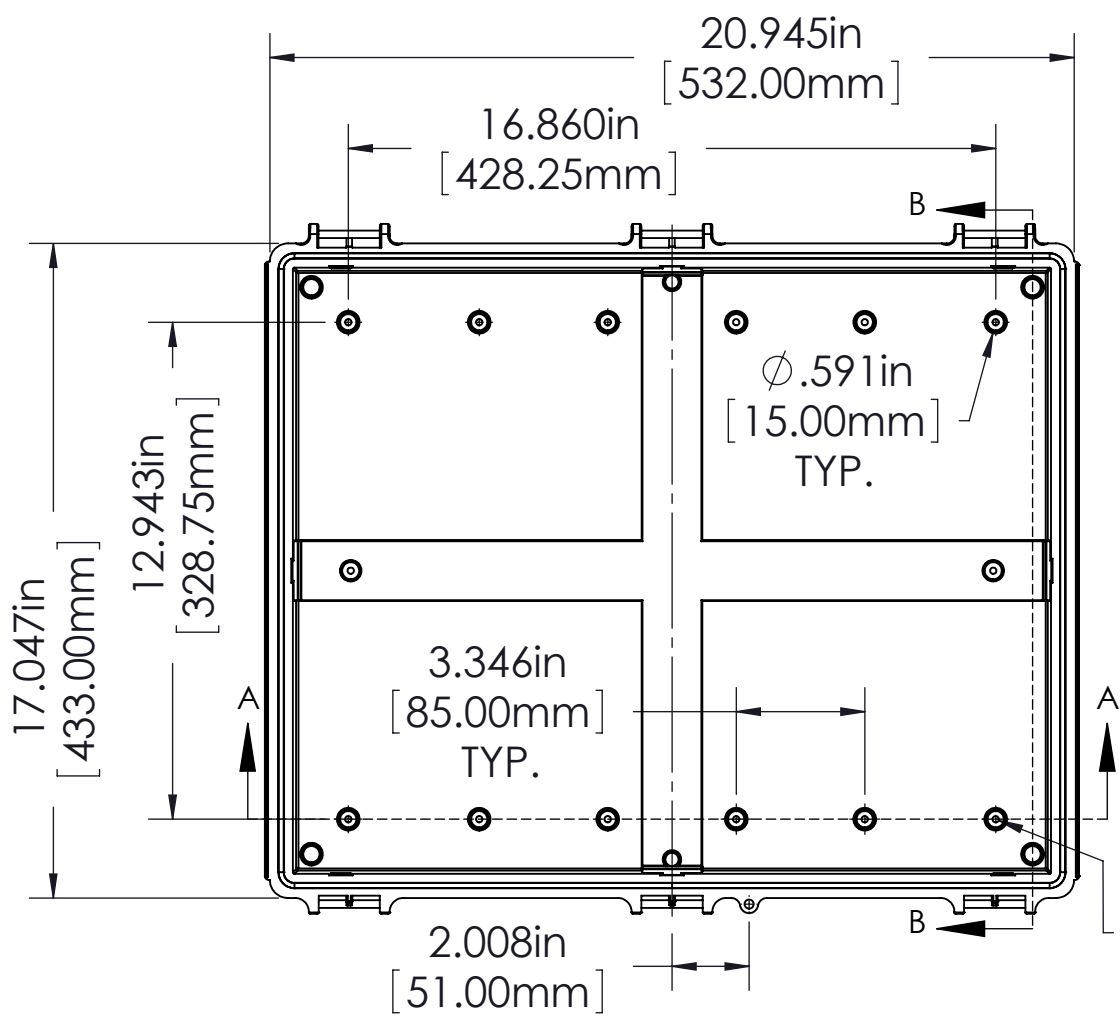


BODY

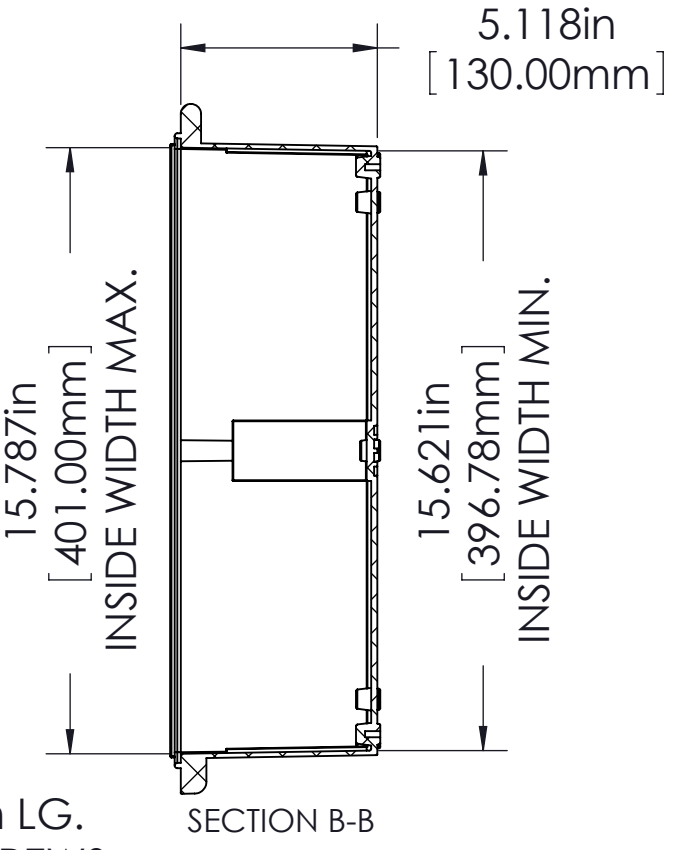


Ø.165in [4.20mm]
FOR M5 x 10mm LG. SELF-TAPPING SCREWS (ABS VERSIONS ONLY)
M5 THREADED INSERTS ON ALL OTHER VERSIONS USE M5 x 8mm LG. MACHINE SCREWS.

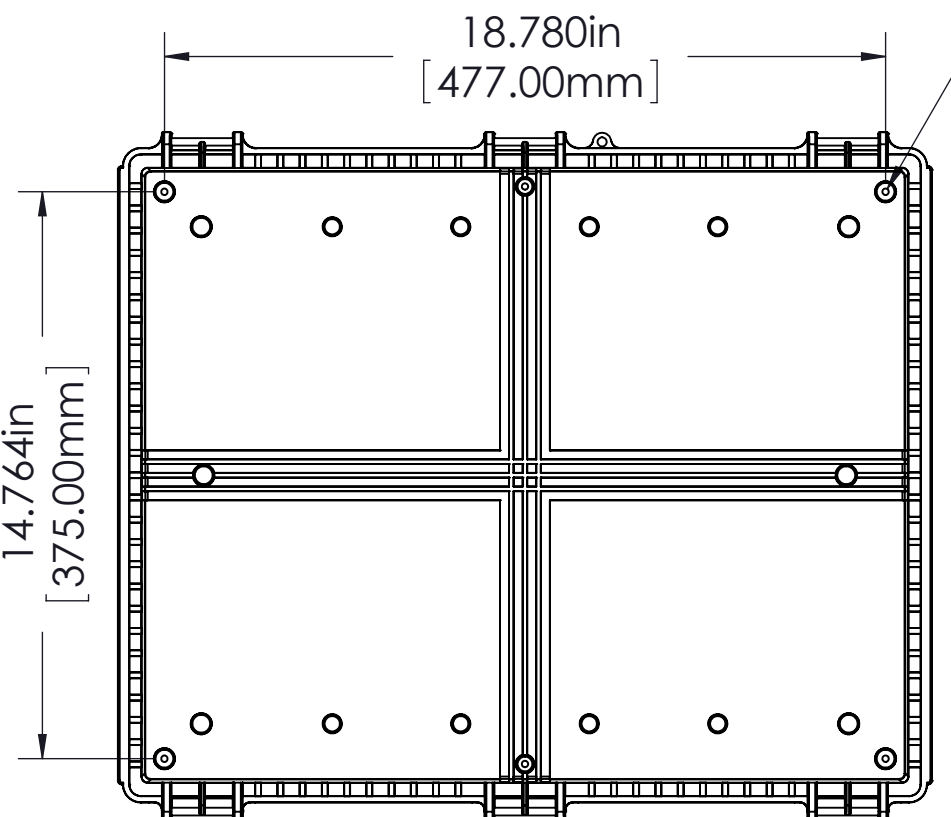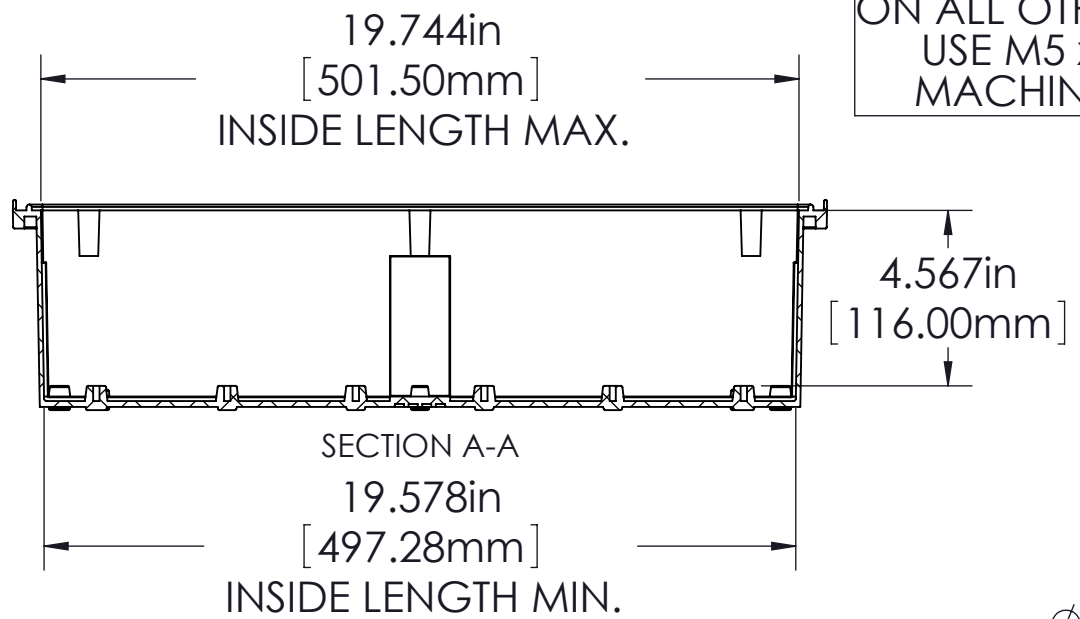



Ø.165in [4.20mm]
FOR M5 x 10mm LG. SELF-TAPPING SCREWS 4 PLCS.

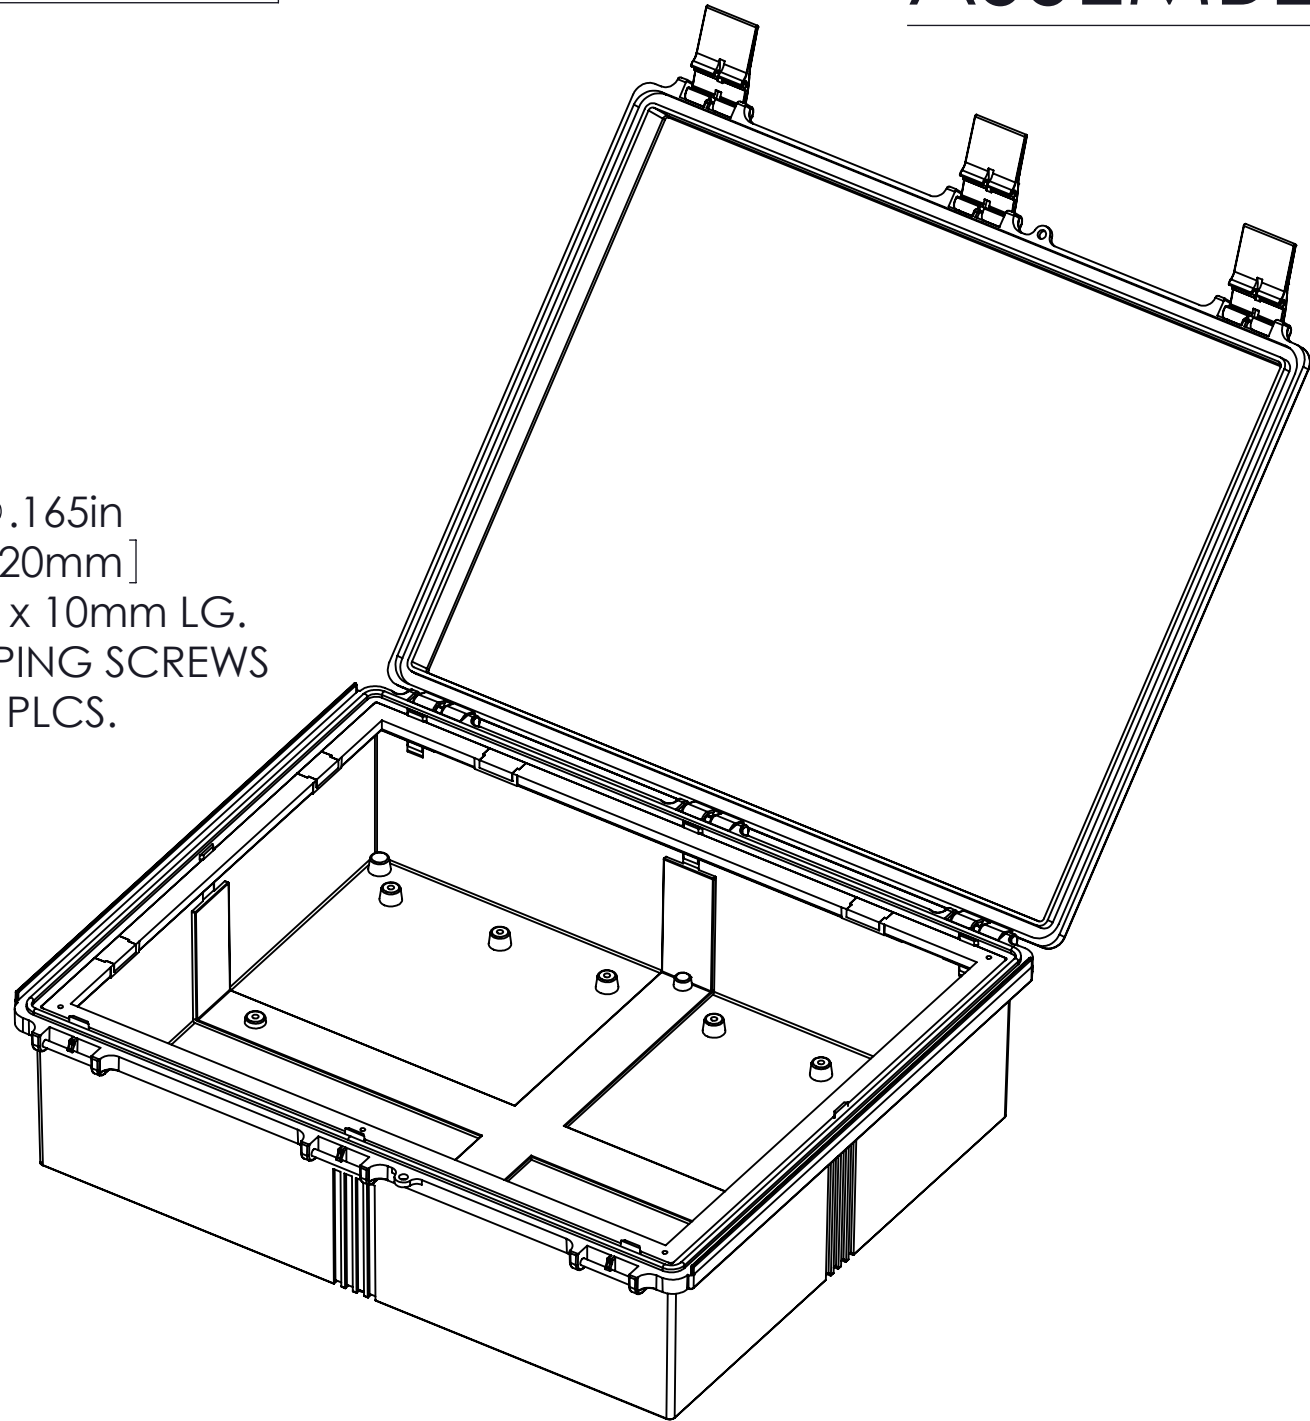

ASSEMBLY

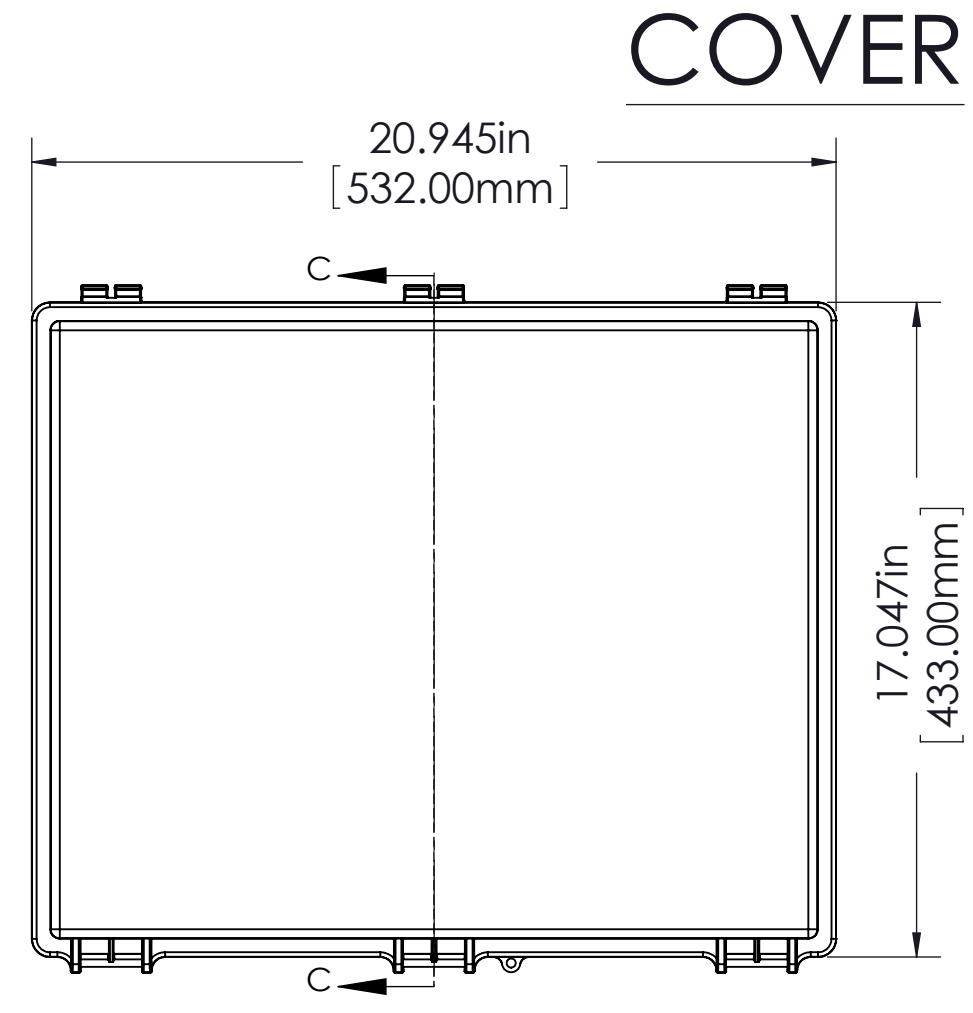

COVER

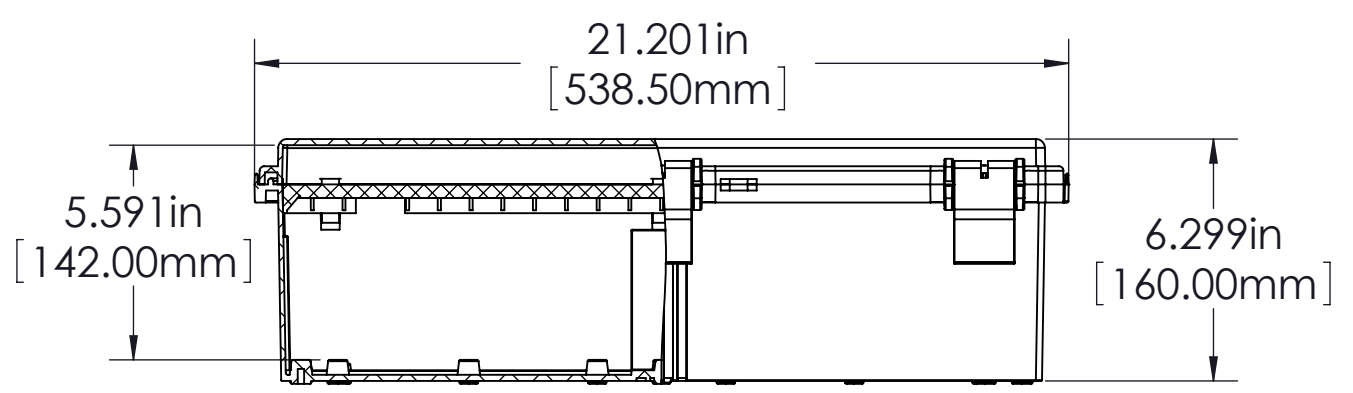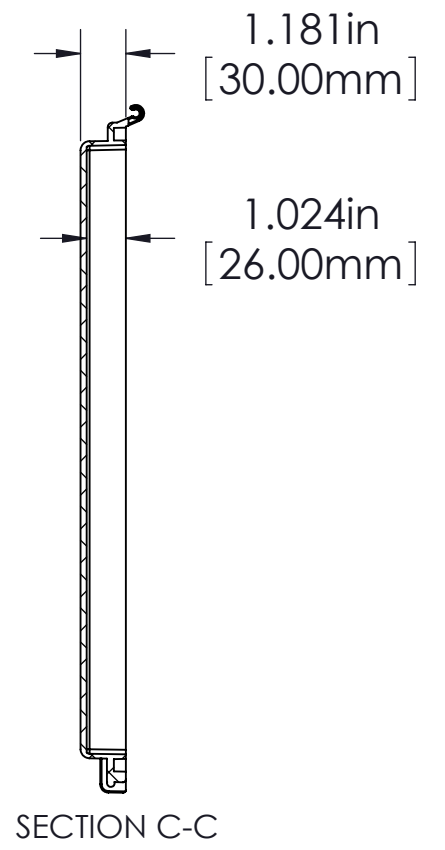

NOTES:
1) UNIT COMES COMPLETE WITH (4) WALL MOUNTING BRACKETS & (4) M4 x 10mm LG. SELF-TAPPING SCREWS. (NOT SHOWN)
2) BOXES DESIGNED TO MEET THESE STANDARDS: NEMA 1,2,4,4X, AND IEC529-IP65 REQUIREMENTS.
TOLERANCE:
ALL DIMENSIONS HAVE ±0.039in [±1mm] TOLERANCE UNLESS OTHERWISE SPECIFIED.

PART NO.	MATERIAL		USE
	BODY	COVER	
NBF-32036	ABS	ABS	INDOOR
NBF-32136	ABS / PC	ABS / PC	INDOOR
NBF-32236	ABS / PC	CLEAR PC	INDOOR
NBF-32336	PBT / PC	PBT / PC	OUTDOOR
NBF-32436	PBT / PC	CLEAR PC	OUTDOOR

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Bud Industries:

[NBF-32336](#) [NBF-32136](#) [NBF-32236](#) [NBF-32036](#) [NBF-32436](#)