
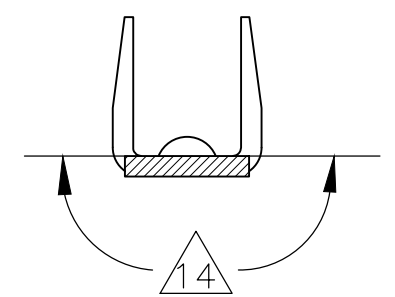
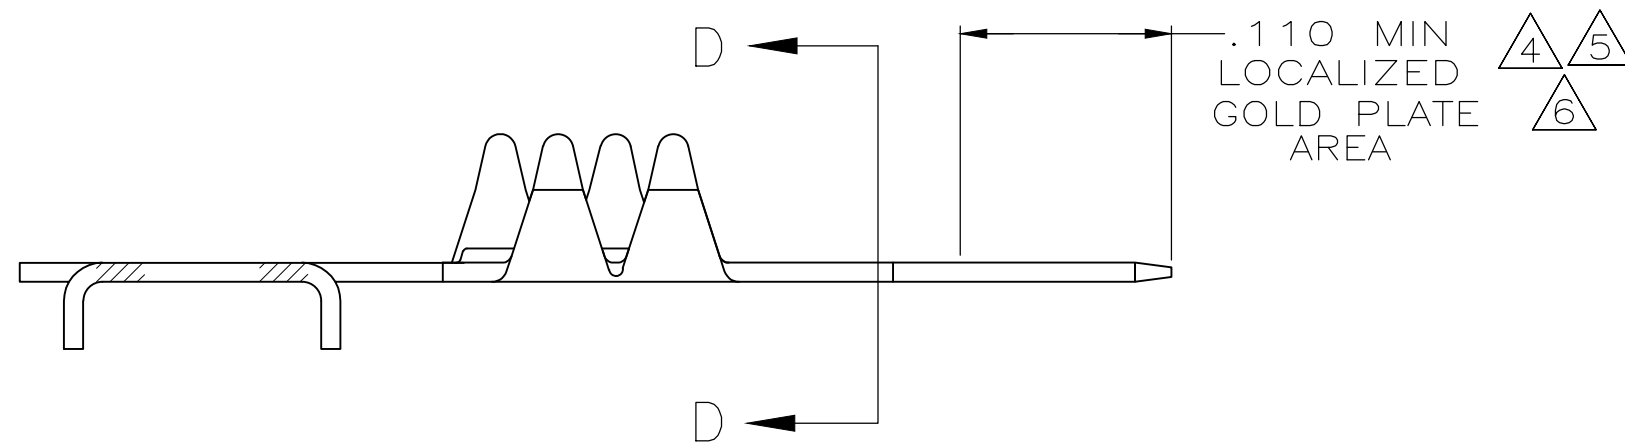


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	Y1	REVISED PER ECR-18-007177	4MAY2018	HX	WH

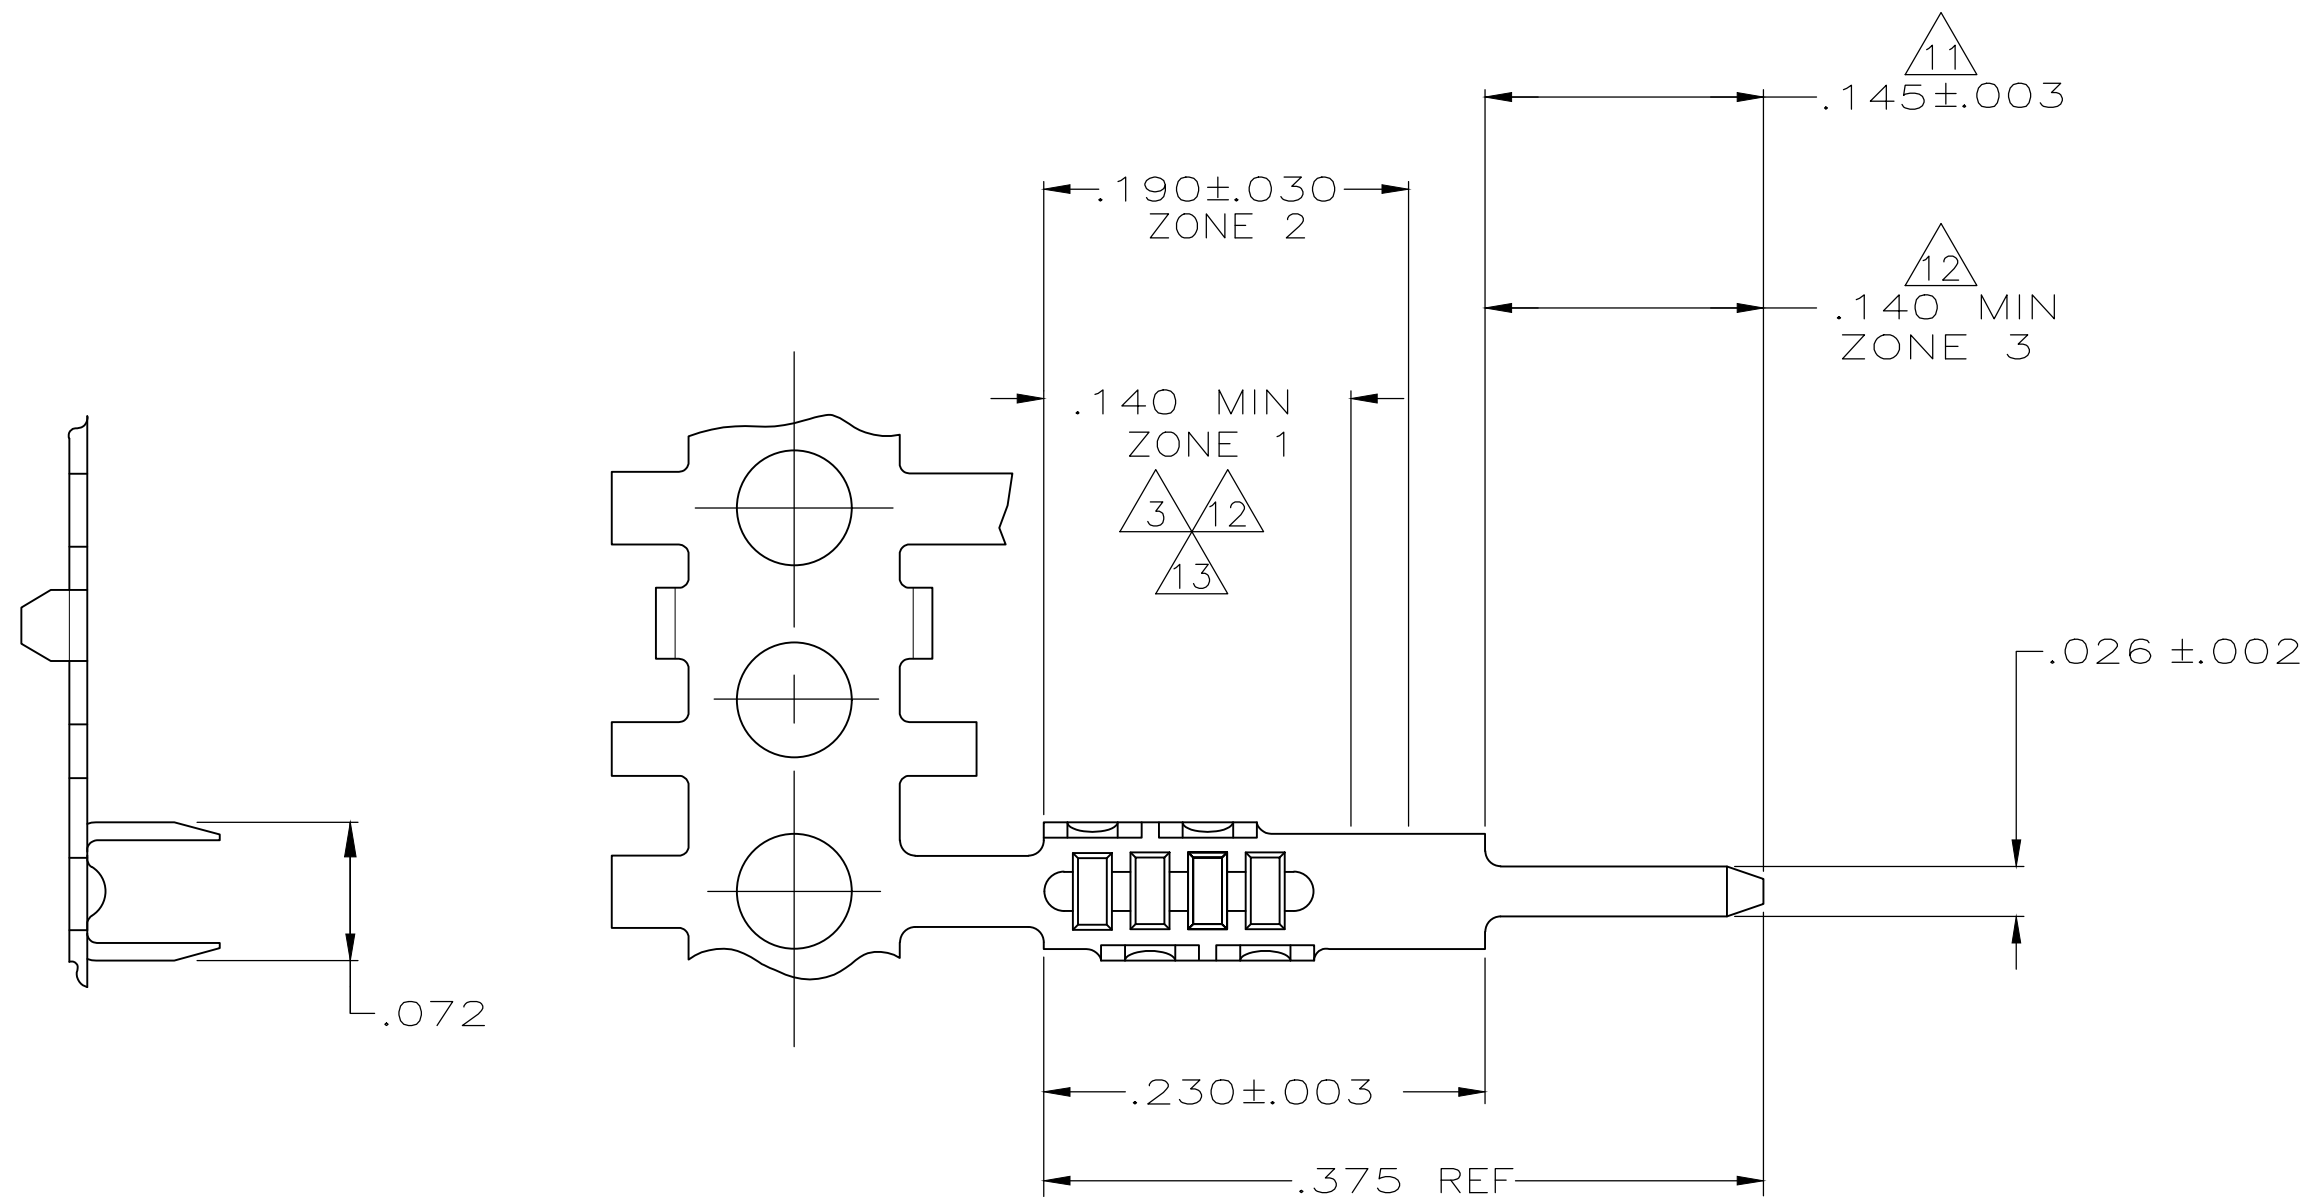

SECTION D-D

- 1 .000050 MIN THK NICKEL UNDERPLATE OVER ENTIRE CONTACT.
- 2 .000150 MIN BRIGHT TIN/LEAD OVER ENTIRE CONTACT.
- 3 .000100 MIN THK BRIGHT TIN/LEAD IN ZONE 1.
- 4 GOLD FLASH IN LOCALIZED GOLD PLATE AREA.
- 5 .000015 MIN GOLD IN LOCALIZED GOLD PLATE AREA
- 6 .000030 MIN GOLD IN LOCALIZED GOLD PLATE AREA
- 7. TO BE APPLIED PER AMP APPLICATION SPEC 114-16015.
- 8. RECOMMENDED HOLE SIZE IS .031-.035 DIA.
- 9 FOR SOLDERABILITY SEE AMP PRODUCT SPEC 108-9024.
- 10 .000150 MIN TIN-LEAD IN ZONE 2.
- 11 AREA TO BE UNPLATED (-9 ONLY).
- 12 GOLD FLASH IN ZONE 1. .000150 MIN TIN IN ZONE 3.
- 13 GOLD FLASH IN ZONE 1.
- 14 GOLD PLATING MAY OR MAY NOT BE PRESENT ON THE BOTTOM OF THE CRIMP BARREL IN THIS AREA.
- 15 .000150 MIN TIN ENTIRE CONTACT.

1 15 9	2-88997-7
1 6 13 14	1-88997-4
1 5 13 14	1-88997-3
1 9 12 14	1-88997-2
OBSELETE 10 11	88997-9
1 3 6	88997-5
1 3 5	88997-4
SUPERSEDED BY 88997-5 1 3 4	88997-3
1 2 9	88997-2
FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. MCMASTER 10MAR04				
DIMENSIONS: INCHES		CHK S. BOLASH 10MAR04				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M. WALMSLEY 10MAR04	NAME CONTACT, SOLDER TAB, FFC, .100 ̢			
0 PLC ± -		PRODUCT SPEC 108-9024	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
1 PLC ± -		APPLICATION SPEC 114-16015	A2	00779	C=88997	-
2 PLC ± -		FINISH SEE TABLE	WEIGHT	SCALE	SHEET	REV
3 PLC ± .005			0.000000	10:1	1 OF 1	Y1
4 PLC ± -			CUSTOMER DRAWING			
ANGLES ± -						

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-88997-4](#)