

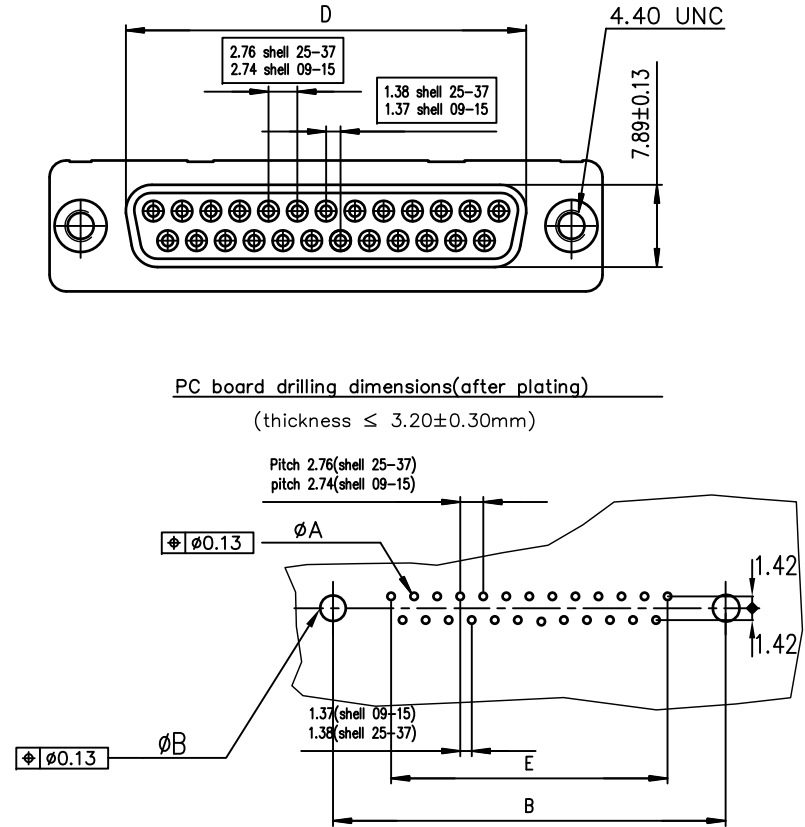


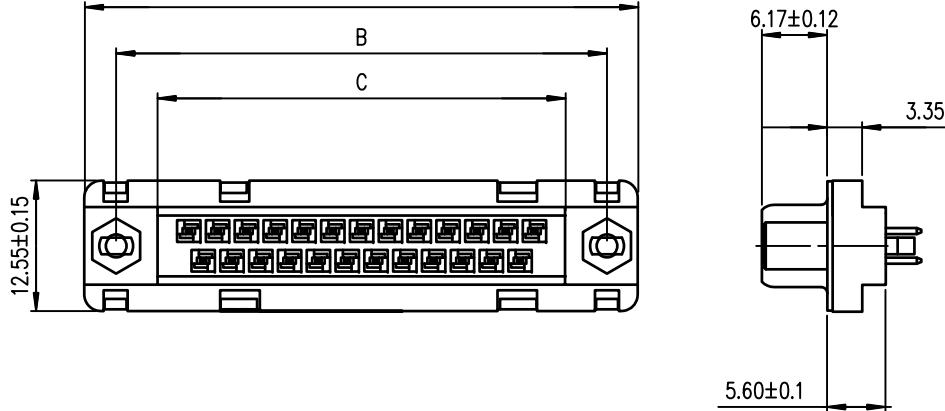

ROHS PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER	PART NUMBER
09	30.81	24.99	16.96	16.21	10.96	D09S90C4GV00LF	D09S90C6GV00LF
15	39.14	33.32	25.18	24.54	19.18	D15S90C4GV00LF	D15S90C6GV00LF
25	53.03	47.04	39.12	38.25	33.12	D25S90C4GV00LF	D25S90C6GV00LF
37	69.32	63.50	55.68	54.71	49.68	D37S90C4GV00LF	D37S901C6GV00LF
						gold flash	0.76» gold

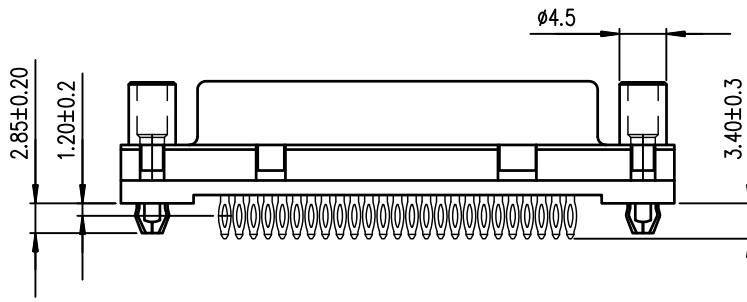

PC board drilling dimensions(after plating)
(thickness ≤ 3.20±0.30mm)

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0001

mat'l. code				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family D-SUB			
ltr	ecn no	dr	date	tolerances unless otherwise specified						title			
B	—	JAR	1996-07-24	angles	linear	.0±0.1		scale 2:1		FEMALE CONNECTOR DELTA LOW PROFILE STRAIGHT PRESS-FIT			
C	LS05-004	MPE	2005-02-08			.00±0.1							
D	LS06-0097	LGO	2006-07-29			0'±2'							
E	LS06-0140	LGO	2006-09-25			.000±0.1							
F	ELX-I-24020	AAB	2016-06-06	dr	PESSON	1995-10-03		Amphenol FCi		dwg no		sheet 1 of 1	size
				engr	MITHUN PAUL	2016-06-06				C01-8646-0372		A3	
				chr	ATHUL A.B	2016-06-06							
				appd	BIJU K PAUL	2016-06-06							
sheet index		revision sheet		F 1							type Product Customer Drawing		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[D09S90C6GV00LF](#) [D15S90C6GV00LF](#) [D25S90C6GV00LF](#) [D37S90C4GV00LF](#) [D09S90C6GV00](#) [D15S90C6GV00](#)
[D25S90C6GV00](#) [D37S90C4GV00](#) [D09S90C4GV00LF](#) [D37S90C6GV00LF](#)