


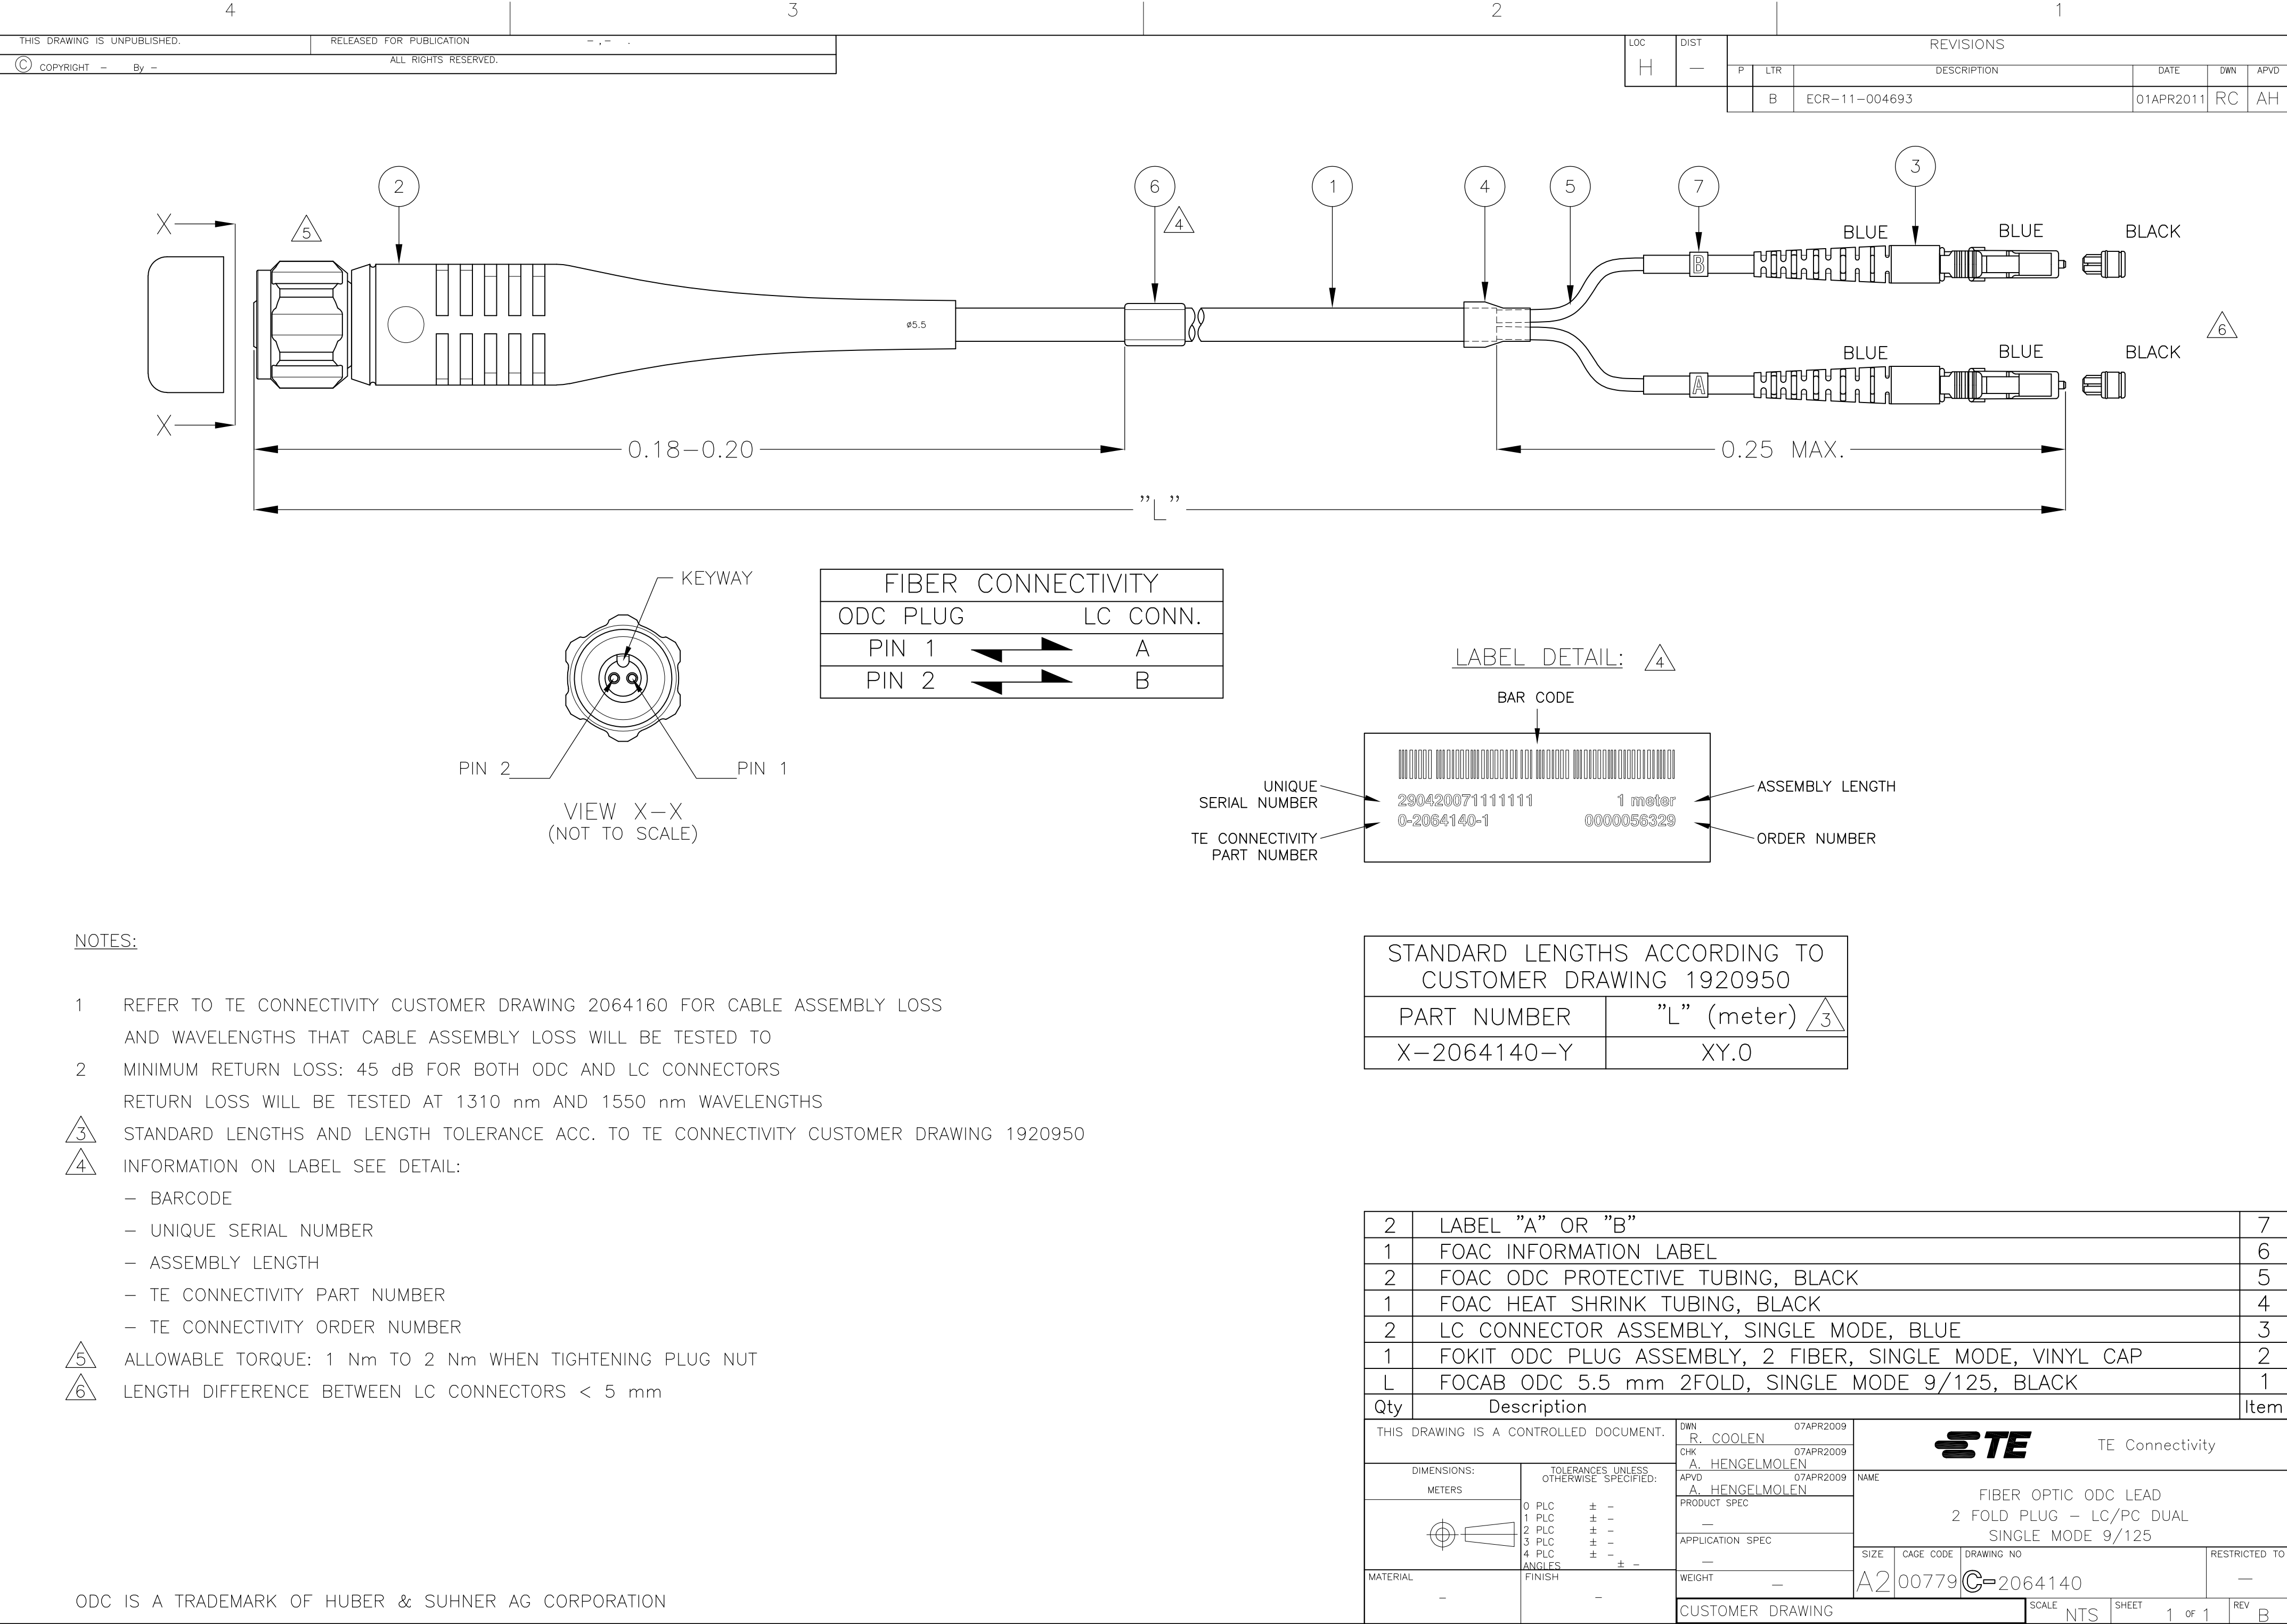

2

6

1

4

5

7

3

5

4

6

Ø5.5

0.18-0.20

0.25 MAX.

VIEW X-X
(NOT TO SCALE)

KEYWAY

PIN 2

PIN 1

FIBER CONNECTIVITY

ODC PLUG	LC CONN.
PIN 1	A
PIN 2	B

LABEL DETAIL: 4

BAR CODE

UNIQUE SERIAL NUMBER

290420071111111

0-2064140-1

ASSEMBLY LENGTH

1 meter

0000056329

TE CONNECTIVITY PART NUMBER

ORDER NUMBER

NOTES:

1

REFER TO TE CONNECTIVITY CUSTOMER DRAWING 2064160 FOR CABLE ASSEMBLY LOSS AND WAVELENGTHS THAT CABLE ASSEMBLY LOSS WILL BE TESTED TO

2

MINIMUM RETURN LOSS: 45 dB FOR BOTH ODC AND LC CONNECTORS

RETURN LOSS WILL BE TESTED AT 1310 nm AND 1550 nm WAVELENGTHS

3

STANDARD LENGTHS AND LENGTH TOLERANCE ACC. TO TE CONNECTIVITY CUSTOMER DRAWING 1920950

4

INFORMATION ON LABEL SEE DETAIL:

- BARCODE

- UNIQUE SERIAL NUMBER

- ASSEMBLY LENGTH

- TE CONNECTIVITY PART NUMBER

- TE CONNECTIVITY ORDER NUMBER

5

ALLOWABLE TORQUE: 1 Nm TO 2 Nm WHEN TIGHTENING PLUG NUT

6

LENGTH DIFFERENCE BETWEEN LC CONNECTORS < 5 mm

2

1

2

1

2

1

L

LABEL "A" OR "B"

FOAC INFORMATION LABEL

FOAC ODC PROTECTIVE TUBING, BLACK

FOAC HEAT SHRINK TUBING, BLACK

LC CONNECTOR ASSEMBLY, SINGLE MODE, BLUE

FOKIT ODC PLUG ASSEMBLY, 2 FIBER, SINGLE MODE, VINYL CAP

FOCAB ODC 5.5 mm 2FOLD, SINGLE MODE 9/125, BLACK

7

6

5

4

3

2

1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
METERS

0 PLC ± -

1 PLC ± -

2 PLC ± -

3 PLC ± -

4 PLC ± -

ANGLES ± -

TOLERANCES UNLESS OTHERWISE SPECIFIED:

FINISH

-

MATERIAL

-

DWN
R. COOLEN
07APR2009

CHK
A. HENGELMOLEN
07APR2009

APVD
A. HENGELMOLEN
07APR2009

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

-

TE Connectivity

FIBER OPTIC ODC LEAD

2 FOLD PLUG - LC/PC DUAL

SINGLE MODE 9/125

SIZE
A2

CAGE CODE
00779

DRAWING NO
C-2064140

RESTRICTED TO

-

CUSTOMER DRAWING

SCALE
NTS

SHEET
1 of 1

REV
B

ODC IS A TRADEMARK OF HUBER & SUHNER AG CORPORATION

1471-9 (3/11)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-2064140-3](#)