


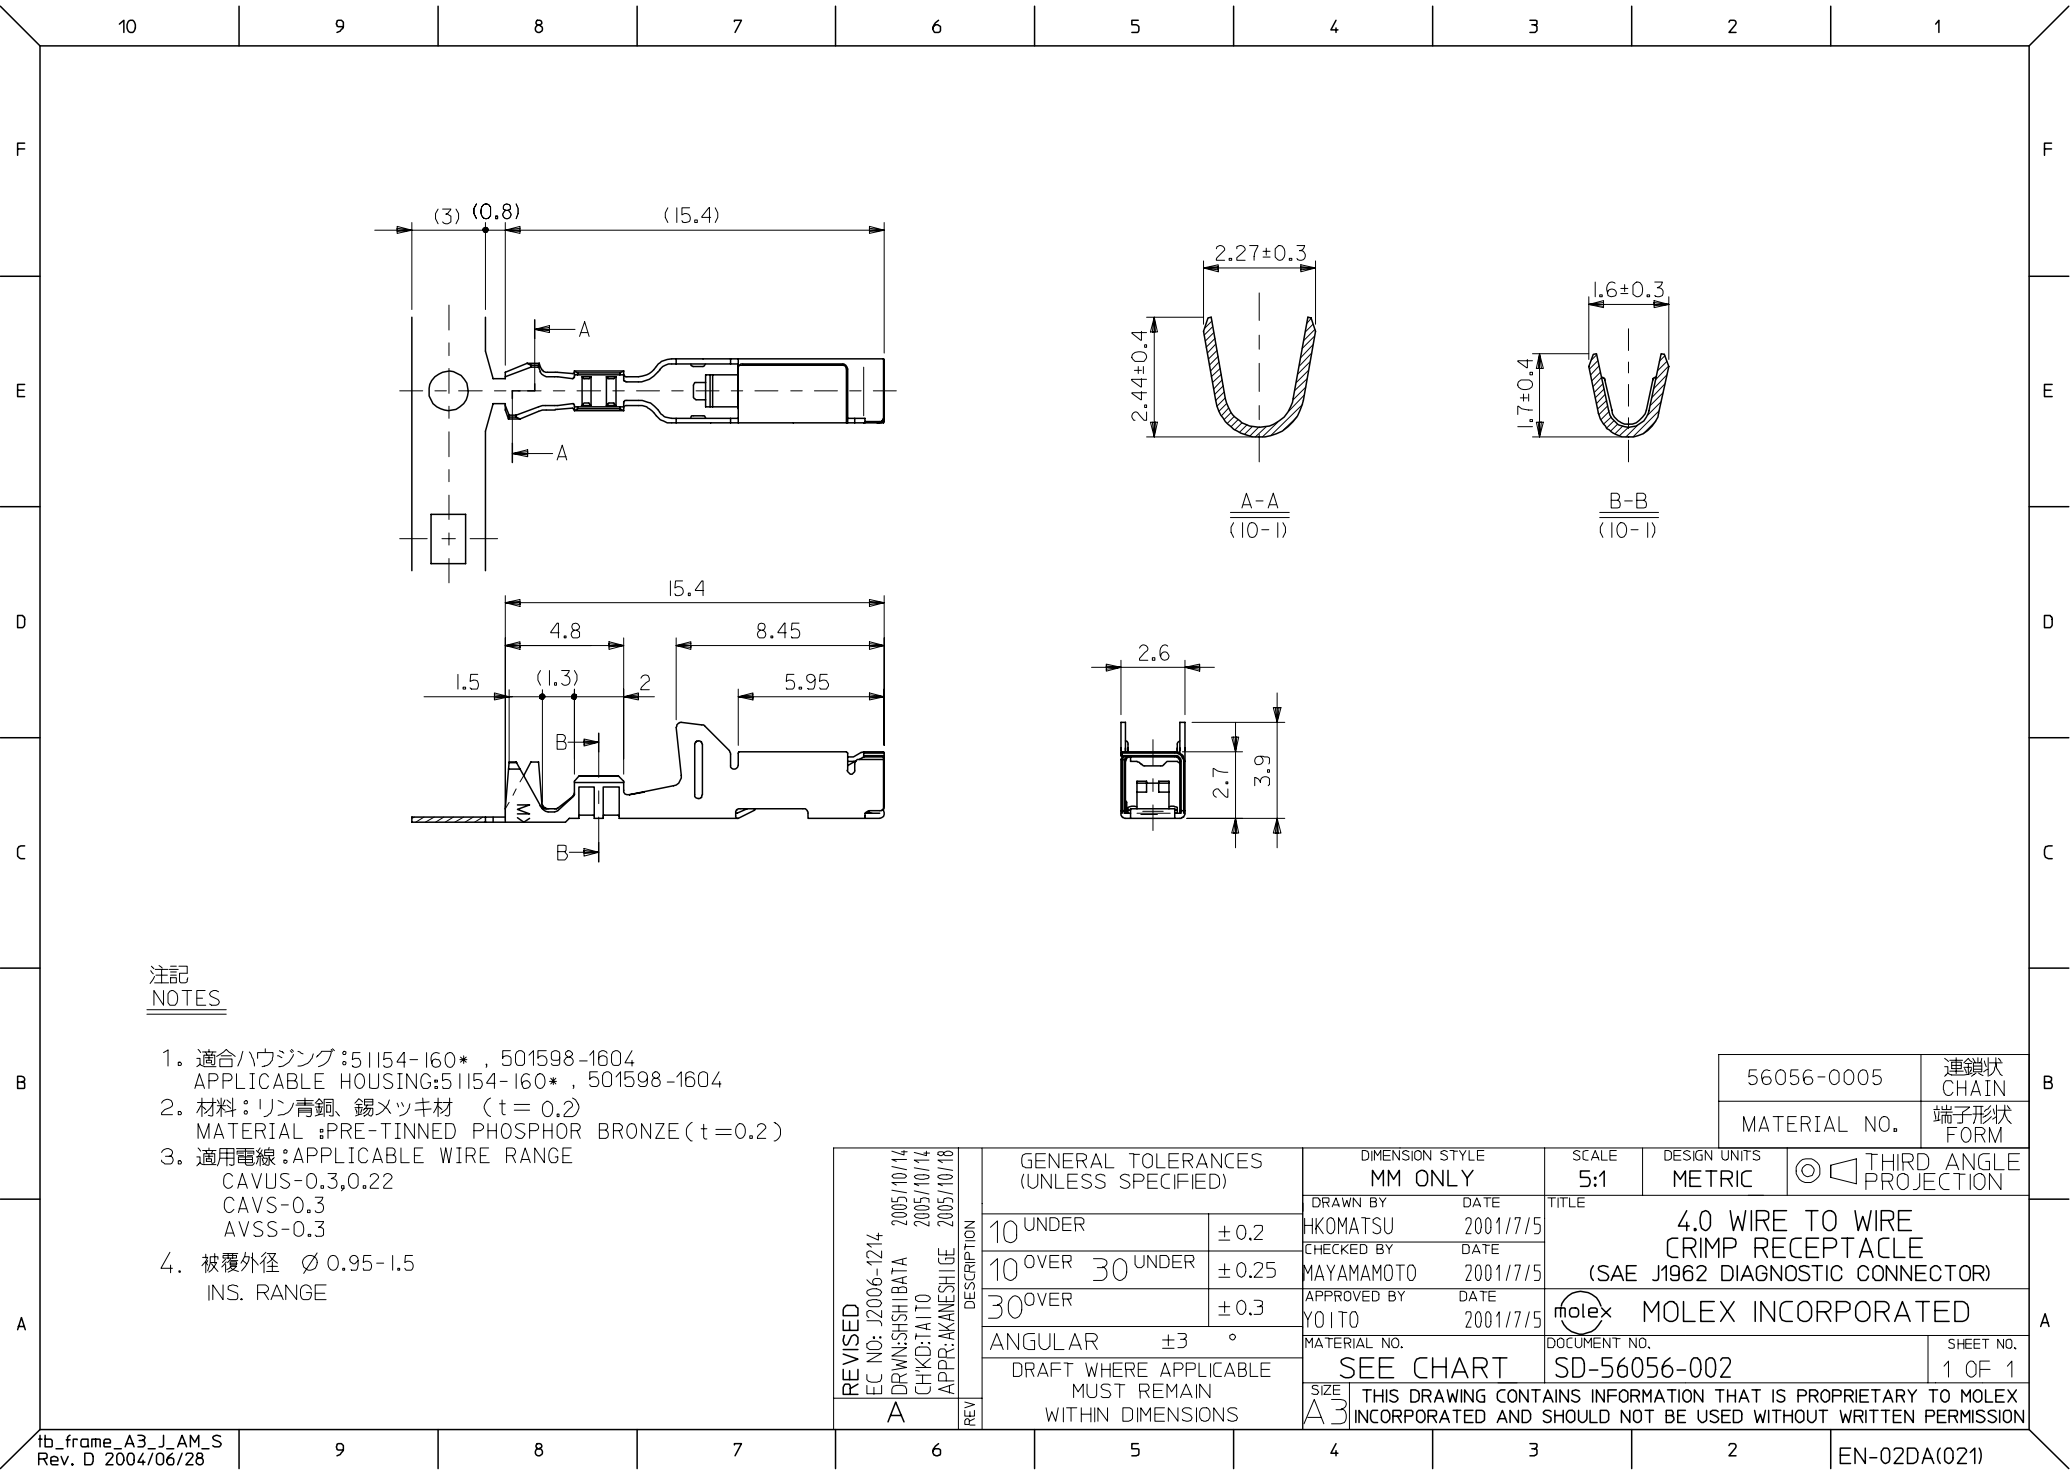

注記
NOTES

- 適合ハウジング:51154-160* , 501598-1604
APPLICABLE HOUSING:51154-160* , 501598-1604
- 材料:リン青銅、錫メッキ材 (t=0.2)
MATERIAL :PRE-TINNED PHOSPHOR BRONZE (t=0.2)
- 適用電線:APPLICABLE WIRE RANGE
CAVUS-0.3,0.22
CAVS-0.3
AVSS-0.3
- 被覆外径 Ø0.95-1.5
INS. RANGE

REVISED EC NO: J2006-1214 DRWN:SHIBATA CHKD:TAITO APPR:AKANEHIGE	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 5:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	± 0.2	DRAWN BY HKOMATSU	DATE 2001/7/5	TITLE 4.0 WIRE TO WIRE CRIMP RECEPTACLE (SAE J1962 DIAGNOSTIC CONNECTOR)				
		10 OVER 30 UNDER	± 0.25	CHECKED BY MAYAMAMOTO	DATE 2001/7/5					
		30 OVER	± 0.3	APPROVED BY YOITO	DATE 2001/7/5	MOLEX INCORPORATED				
		ANGULAR ± 3 °		MATERIAL NO.			DOCUMENT NO.			SHEET NO.
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART			SD-56056-002			1 OF 1
	REV		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[56056-0005](#)