

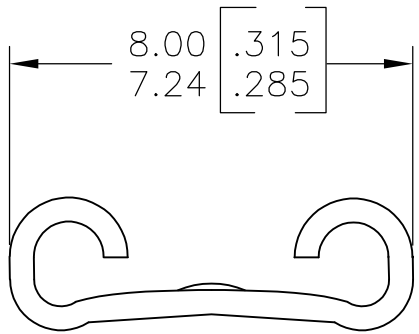


LOC	DIST	REVISIONS				
AF	50	P	LTR	DESCRIPTION	DATE	APVD
		J		REVISED PER ECR-12-013459	27NOV2012	KH PD


- 1 CONTINUOUS STRIP ON REELS.
- 2 MATING TAB THK TO BE 0.81±0.025 [.032±.001].
- 3 WIRE SIZE IS #18-#14 AWG.
- 4 INSULATION RANGE IS 1.52-3.81 [.060-.150] DIA.
- 5 REEL WITH INTERLEAVING PAPER.
- 6 MATERIAL: BRASS
- 7 MATERIAL: HO4 PHOS BRZ
- 8 RECEPTACLE LENGTH CAN VARY UP TO 6.35 [.250] MAX, THIS SIDE ONLY.
- 9 PREPRODUCTION - FASR REQUIRED

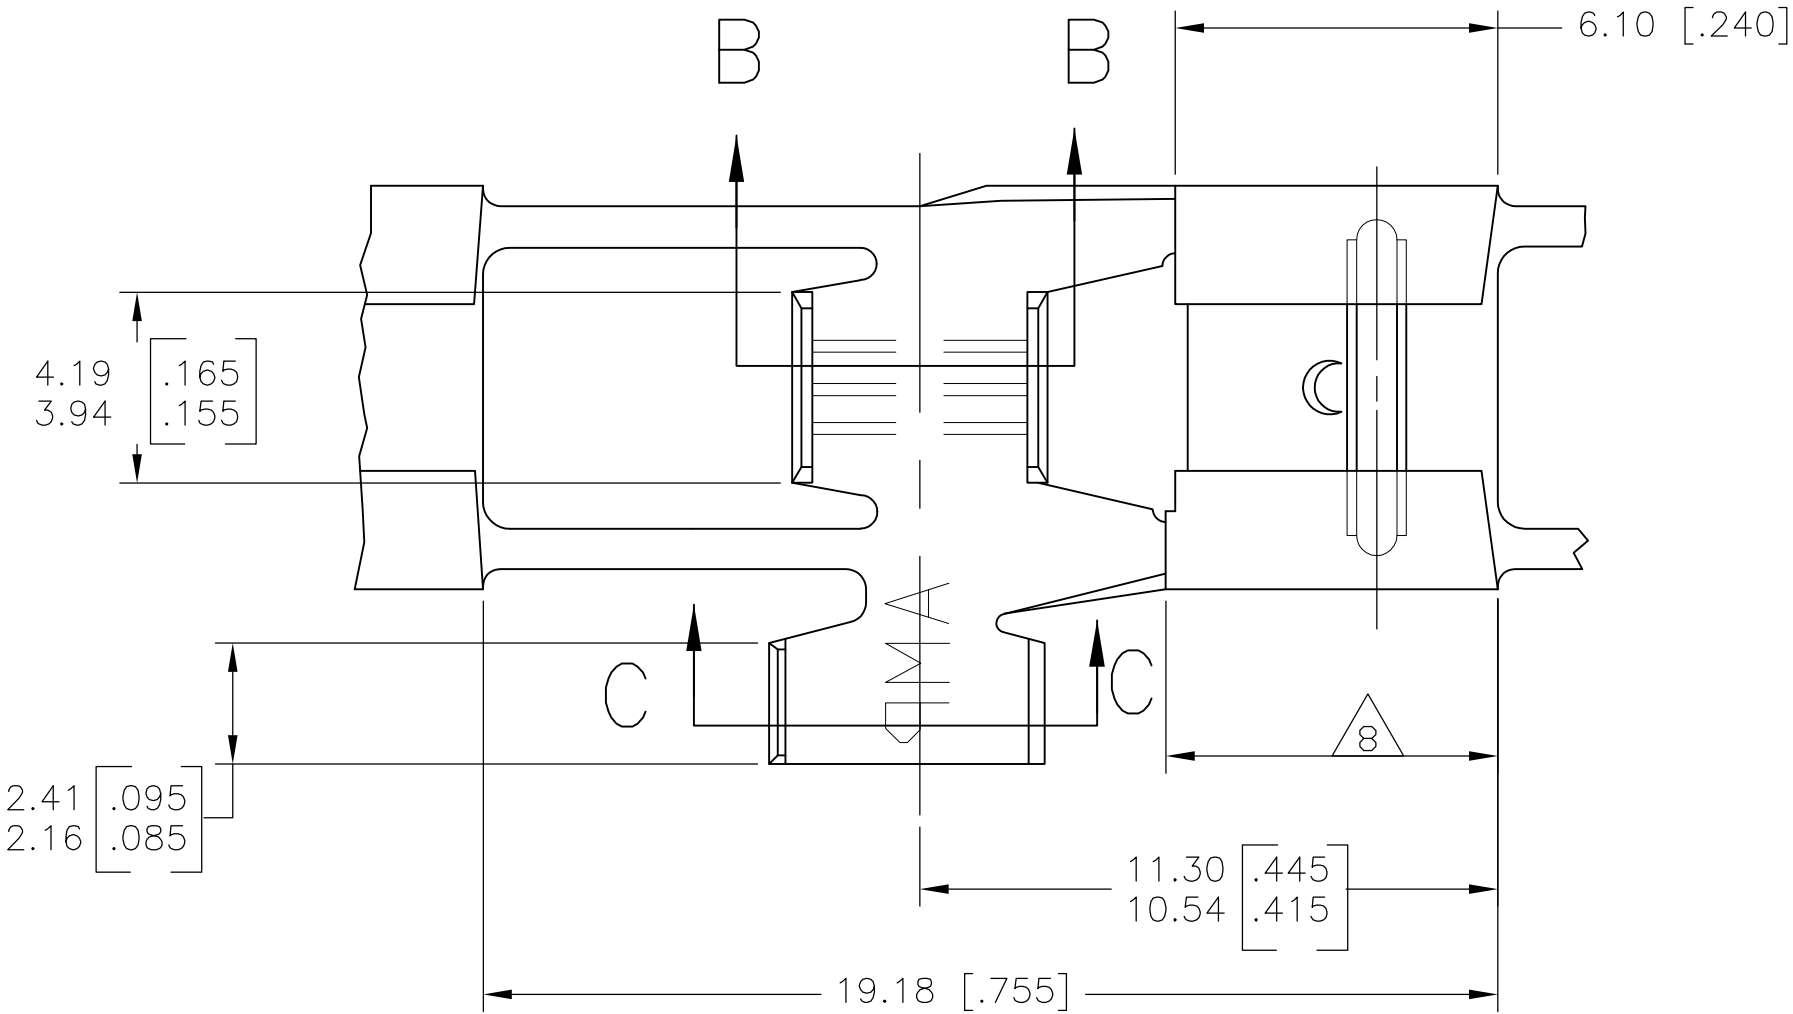


VIEW A-A

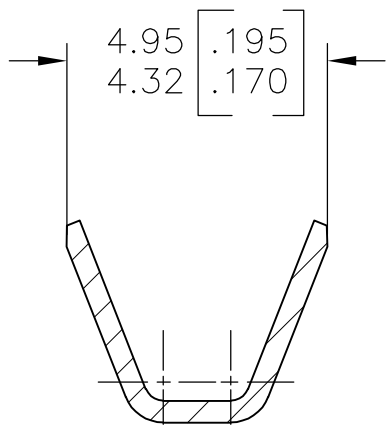

SECTION B-B

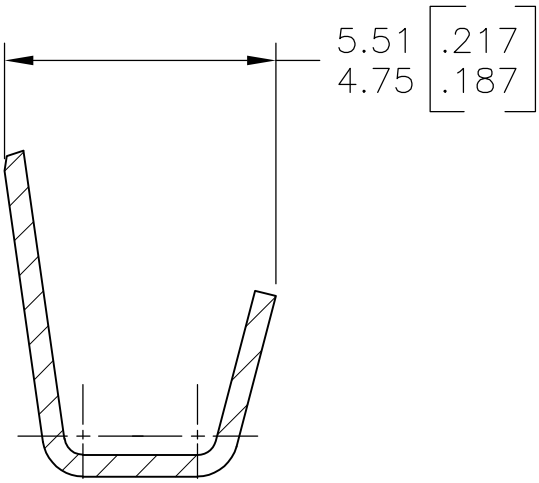

SECTION C-C

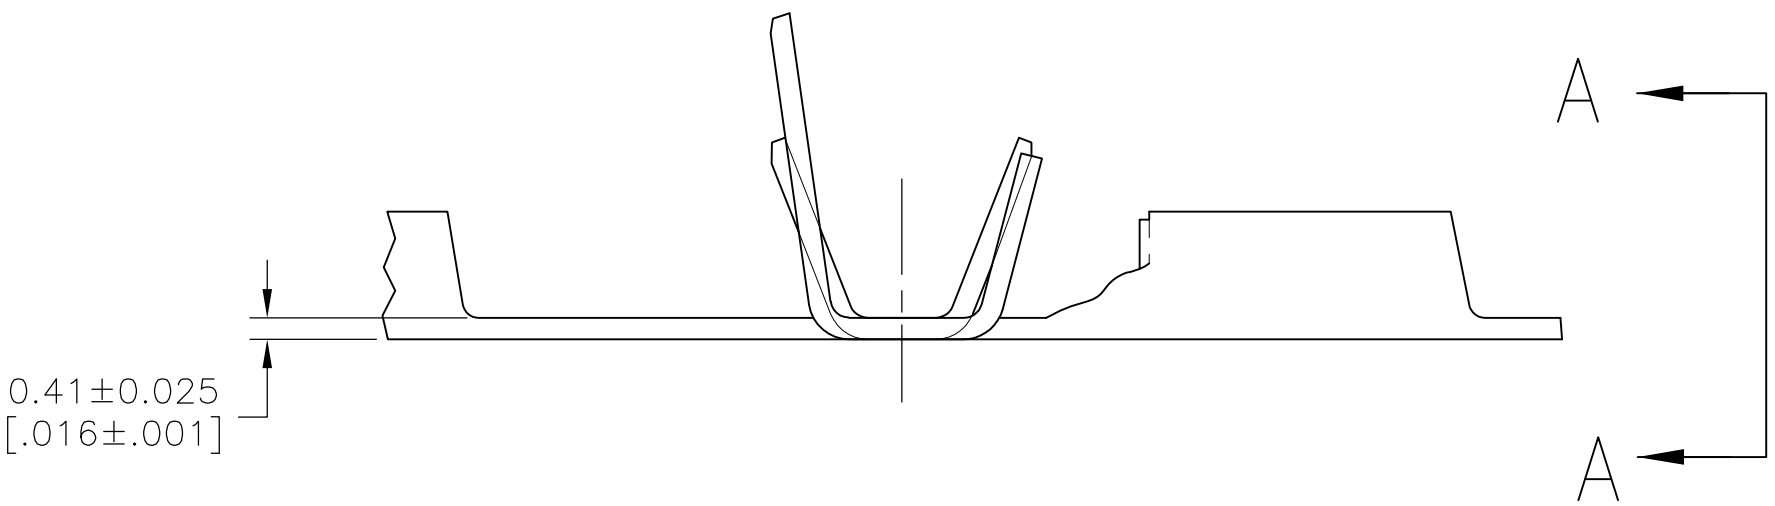

PART NO.	WIRE		INSULATION DIAMETER (MAX)	WIRE BARREL CRIMP				TENSILE STRENGTH POUNDS
	QTY	SIZE AWG		WIDTH	CRIMP HEIGHT	CRIMPER	ANVIL	
63314-1	1	14	.150	.120	.071	F	FLAT	50
	1	16			.063			30
	1	18			.057			20

5	REVERSE REELED	7	SILVER	9	63314-5
		6	TIN		63314-4
		6	TIN		63314-2
		6	-		63314-1
		MATERIAL	FINISH		PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN 6/16/87
JR RUTH

CHK 6/16/87
MS FEHER

APVD 6/16/87
C MEYERS

DIMENSIONS:
mm [INCHES]

0 PLC ± -

1 PLC ± -

2 PLC ± 0.25 [.010]

3 PLC ± -

4 PLC ± -

ANGLES ± -

FINISH

MATERIAL -

SEE TABLE

TE Connectivity

NAME

RECEPTACLE, FLAG, FASTON,
6.35 [.250] SERIES

SIZE A2

CAGE CODE 00779

DRAWING NO C-63314

RESTRICTED TO -

CUSTOMER DRAWING

SCALE 7:1

SHEET 1 OF 1

REV J

1471-9 (3/11)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[63314-1](#)